


Living with Predators

Resource Guide

Practical Electric Fencing Resource Guide: Controlling Predators

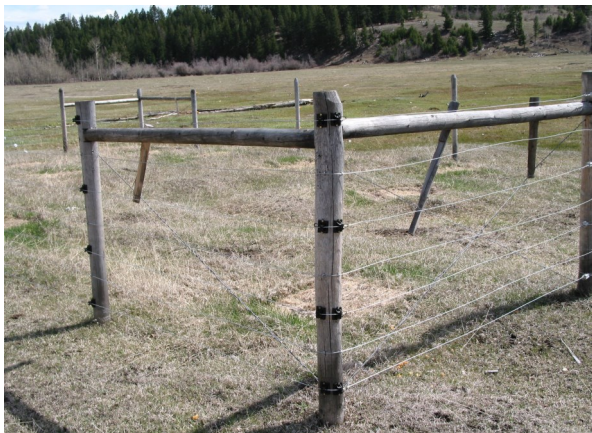

2013 Edition

Produced by



**In cooperation with Montana Fish, Wildlife & Parks
and the Wildlife Management Institute**

Compiled by:

Patricia Sowka

© 2013 Living with Wildlife Foundation, Inc.

*For more information on the “Living With Predators Resource Guide” series, please
contact Living with Wildlife Foundation at:*

E-mail: info@lwwf.org

www.lwwf.org

Citation:

Sowka, P. 2013. Living with Predators Resource Guide Series—Practical Electric Fencing Resource Guide: Controlling Predators. Produced by the Living with Wildlife Foundation in cooperation with Montana Fish, Wildlife & Parks. 2013 edition. Arlee, Montana.

Cover photos Courtesy of (clockwise from top left): James Jonkel, Montana Fish, Wildlife & Parks; Patti Sowka, Living with Wildlife Foundation; Stacy Courville, CSKT Wildlife Management; and James Jonkel, Montana Fish, Wildlife & Parks.

Acknowledgements

We greatly appreciate the participation of the following individuals:

Larry Feight, High Country Ag Marketing

Jeff Marley, Margo supplies

Gallagher USA

Thomas D. Mangelsen, Images of Nature

Derek Reich, Zöoprax Productions

Bill Lavelle, Predator Solutions Inc.

***Funding for the 2013 Edition provided by
the Interagency Grizzly Bear Committee***

Publication Disclaimer

This publication is designed to provide accurate and authoritative information in regard to the subject matter covered. It is sold with the understanding that the publisher is not engaged in rendering legal, accounting or other professional advice. If legal advice or other expert assistance is required, the services of a professional should be sought.

Foreword

The Living With Predators Resource Guides were compiled by the Living with Wildlife Foundation in cooperation with the Montana Fish, Wildlife & Parks' *Living with Predators Project*. The guides are intended to help minimize conflicts between people and black bears, grizzly bears, polar bears, wolves, coyotes and mountain lions. Information has been compiled into four separate volumes:

***Techniques and Refuse Management Options for
Residential Areas, Campgrounds,
and Other Group-Use Facilities,***

Recreating in Bear, Wolf and Mountain Lion Country,

Predator Behavior Modification Tools for Wildlife Professionals,

And

Practical Electric Fencing Resource Guide: Controlling Predators

The guides provide ideas on how to reduce bear attractants, deter bears and other predators from developed areas, and information about where to obtain bear-resistant products.

Care has been taken to ensure the accuracy and completeness of the information contained in the Living With Predators Resource Guides; however, the author and Montana Fish, Wildlife and Parks are not responsible for errors contained in these guides and does not guarantee the performance of the products and techniques included in the resource guides.

Not all of the electric fencing products and designs listed in the resource guides have been tested and proven to be predator-resistant. The Living with Wildlife Foundation and Montana Fish, Wildlife & Parks have recently implemented a new field testing and evaluation program to document the long-term effectiveness of the designs included in this guide as well and alternative fencing designs.

Table of Contents

Uses for Electric Fencing	1-1
Planning Your Fence	1-2
Fencing Components	1-2
Energizers	1-2
Wire and Posts	1-4
Grounding An Electric Fence	1-5
Types of Grounding Systems	1-6
Bears and Electric Fence: A starters guide	1-7
Temporary/Portable Electric Fencing Designs to Deter Predators	2-1
Temporary Electric Fencing	2-1
Portable Electric Fencing	2-2
Portable fence for Food Storage (U.S. Forest Service)	2-5
Electrified "UnWelcome Mats"	2-13
Heavy-Duty Portable Fencing	2-16
Electrifying Dumpsters and Garbage Containers	2-17
Montana Fish, Wildlife & Parks Electric Fence Dumpster Kit and "Hot" Dumpster	2-18
Permanent Electric Fencing Designs to Deter Predators	3-1
Contract Fencing by Margo Supplies	3-3

Bear Exclusion Designs	3-6
Grizzly Bear Exclusion	3-6
Deterring Polar Bears with Electric Fencing	3-9
Electrified Birdfeeders	3-37
Bears and Bees	3-39
Montana Fish, Wildlife & Parks Bee Yard Fence Kit	3-40
Florida Fish & Wildlife Conservation Commission Bear Exclusion Information	3-48
Virginia Department of Game & Inland Fisheries Electric Fencing for Black Bears Information	3-55
U.S. Forest Service Electric Fence System for Meeting NCDE Food Storage Regulations	3-58
Natural Resources Conservation Service	3-62
Alaska Specifications—Bear Exclusion Fence	3-62
Montana Specifications for Deterring Bears	3-82
Wolf and Coyote Exclusion	4-1
Mountain Lion Exclusion	5-1
Electric Fence Manufacturers	6-1
Other Resources	7-1

Uses of Electric Fences

Electric fences can be used to deter bears and other predators from areas where they are not welcome. Some examples are listed below.

- | | | |
|---------------------------|--------------------------|-----------------------------|
| • Beehives | • Campsites | • Seasonal or remote cabins |
| • Compost piles | • Children's play areas | • Pig pens |
| • Garbage containers | • Fish cleaning stations | • Sheep bedding areas |
| • Orchards and crops | • Freezers | • Calving areas |
| • Landfills | • Gardens | • Chicken coops |
| • Livestock feed storage | • Outfitter camps | • School playgrounds |
| • Livestock grazing areas | • Garages | • Food grease storage |
| • Sheds | • Birdfeeders | • Dog kennels |
| • Greenhouses | • Goat pens | • Aviaries |
| • Recycling Bins | • Rabbit hutches | |

Be creative!

Almost anything can be rigged to deliver an electric shock to an unwanted predator. And the use of solar-powered energizers has made it possible to use electric fencing in more remote areas where access to power may be unavailable.

Keep in mind that the same principles of electric fencing still apply when used to secure any type of bear attractant or to protect livestock from predators. You will still need an energizer and a good grounding system to make the system effective.

Planning Your Electric Fence

In this resource guide, we present basic guidelines and considerations for using electric fencing to exclude grizzly bears, black bears, wolves, coyotes, and mountain lions. Be aware that predator behavior is very complex and each animal may react differently based upon its own unique life experiences.

Before you begin planning your fence project, it is important to consider the following:

- What type(s) of predators are you trying to exclude?
- Is your need for electric fencing temporary or permanent?
- What kind of access will the enclosed area need? Will people need frequent access to the area? For example: dumpsters, community gardens, or public-use sites.
- How big is the area you need to enclose? Measure the area in acres, linear feet, or miles.
- Draw up a map of the area to be fenced.
- Check local ordinances on electric fencing. Some areas require warning signage.
- Your local wildlife officials or electric fencing retailer are good contacts for more information.

Electric Fencing Components

Each electric fence consists of an energizer, grounding system, posts, insulators, and wire. Other components such as switches, lightning diverters, gate handles, etc. are also part of a system, however are not necessarily required. When designing a fence for predator exclusion, there are certain characteristics that must be considered when choosing each fence component. Each of these critical fence components is listed below along with a brief description of key characteristics that must be considered when fencing to exclude predators.

Energizers

Energizers are the power source for the electric fence and come in a wide variety depending on the species to be controlled, the size of the area to be fenced, and the location of the fence. Energizers store energy and deliver a pulse of electricity throughout the fence system. The stored energy is measured in joules which is the energizer's "horsepower."

Energizers (cont.)

The Importance of Joules!

Joule rating is the single most important factor in choosing an energizer. It is critical that your energizer has enough shocking power for the species you are controlling, **REGARD-LESS** of the size of area you are fencing. Bears, for example, require a minimum joule rating of .7 joules. Many predators have thick fur which can make it difficult to deliver a shock adequate to deter the animal. Using an energizer with a high joule rating can help provide a shock strong enough to turn the animal away.

Most manufacturers rate their energizers in joules in addition to acres or miles of fence. For smaller projects, such as small gardens, dumpsters, or night sheep pens, select an energizer based on the joule rating necessary for the species you are trying to deter. For larger projects such as pastures or paddocks, you will have to consider not only a minimum joule rating. You will also have to choose an energizer that is capable of electrifying a larger area. In other words, the energizer must be powerful enough to deliver an adequate charge over a longer distance.

There are two basic types of energizers: plug-in and battery-operated. Plug-in energizers connect directly into a 110 volt or standard household electrical outlet, or a 220 volt outlet.

Battery-operated energizers connect to a 12 volt deep cycle or marine battery and come with alligator teeth for quick connection. Battery-operated units do require close monitoring for sufficient battery charge.



Solar panels can be added to battery-operated units to charge the battery. Many battery-operated units, such as the Gallagher B100 unit in the picture to the right above, are self-contained and come with a solar panel. It is important that the fenced area receives enough sunlight to ensure the panel can maintain an adequate charge for the battery.

Energizers that plug-in are recommended whenever possible because they tend to be more consistent in their output, generally require less maintenance, and are less expensive than comparable battery powered units. Some situations may require the use of a battery-operated or solar energizer in remote areas that do not have access to 110 or 220 power. There are several battery or solar units that are adequate for predator exclusion—just make sure to choose one that has a joule rating high enough for the species you are trying to deter.

Wire

Wire for electric fencing is typically made of galvanized smooth steel or aluminum. Polywire and polytape have been used effectively for domestic animals, but these materials are not recommended for predator exclusion. Polywire has been used, especially for temporary and backcountry fencing to deter predators from camps. Polytape, however, has not been effective. The polytape could be used for the top strand in a system for a visual reference for humans or trained livestock.

All-metal wire is recommended for predator exclusion. Steel wire is more difficult to work with but is much stronger and lasts longer. Aluminum wire is more conductive and more user-friendly; however, it tends to break with repeated bending and is not as durable over time. Most successful electric fences are made of 14Ga or 12Ga hi-tensile galvanized steel wire. Aluminum should be at least 14Ga and should be used only for temporary or seasonal fencing.

Posts

Electric fences can be erected using a number of different types of posts including fiberglass posts, wood posts, and metal t-posts. While all of these work, wood posts set several feet into the ground tend to be the sturdiest. If the fence you're constructing is intended to be permanent, it is best to use treated wood posts, or a combination of wood and another type of post to add stability to the fence. Less permanent fences can be constructed using fiberglass posts or t-posts with wood posts used only on the corners.



The above fence is constructed using fiberglass posts.

Photo courtesy of Larry Feight.



The fence in the picture at the right is constructed using wooden posts.

Photo courtesy of Larry Feight.

Posts (continued)

The important thing to remember is to use a non-conductive material such as fiberglass or plastic for posts. If wood or metal is used, make sure to use good insulators between the wire strands and the posts.

Grounding the Fence

How grounding works

Grounding essentially is what makes electric fencing effective for controlling animals and is therefore an extremely important component in every electric fence system. The quick explanation of how grounding works is that electrons (electrically-charged particles) travel from the animals' feet to the ground rod and then to the ground terminal of the energizer. In a sense, the animal completes the circuit of the electrical current.

Without proper grounding, the fence will fail and damage can be done to the energizer. Grounding the energizer requires that at least one ground rod be installed and wire run from the ground rod to the ground terminal of the energizer. Ground rods should be 1/2" or 3/4" diameter galvanized steel and at least 6' in length. If possible use ground rods 10' long to maximize contact between the ground rod and the soil. Non-galvanized metal rusts quickly and causes resistance. Therefore, most manufacturers recommend galvanized ground rods.

Painted rods and t-posts will not work to ground the energizer because the paint acts as a barrier preventing contact between the grounding rod and the ground wire. Water pipes and rebar are also not recommended for use as ground rods. **Be sure to adhere to recommendations made by the energizer manufacturer.**

Ground rods should be driven as far into the ground as possible using a t-post pounder or other suitable pounding implement. The more exposure the ground rod has to moist soil, the better the ground will be. If the soil is rocky, the ground rods can be driven in at an angle.

A ground rod clamp is needed to attach the ground wire running from the energizer's ground terminal to the ground rod. Margo Supplies sells a 3/8" bronze clamp to ensure a proper connection between ground rod and ground wire.

If the soil is very dry in the area where the electric fence is being installed, a minimum of three (3) six to ten-foot ground rods should be used. The rods should be placed approximately ten feet apart. In sandy, rocky or clay soils, additional ground rods should be installed to ensure adequate grounding. A ground wire can also be buried the length of the fence and should be attached to each of the ground rods. If metal t-posts are used in the fence construction, the ground wire should also be attached to them underground.

Types of Grounding Systems

All Hot System

In an all hot (+) system, all of the fence strands are electrified (hot). In other words, all of the strands are connected to the hot (usually indicated in red) terminal on the energizer. An all hot system is generally not recommended for predator control unless the fence will only be needed seasonally, during wet and rainy times of the year, or if the ground around the fence is moist and the soil is highly conductive. If the soil is dry, frozen, or rocky, the soil will not adequately conduct the electrons and will not supply a sufficient ground for the animal to receive a substantial shock.

An example of when an all-hot system would work well is enclosing an irrigated garden or fruit tree stand to exclude bears during the spring and summer months.

Hot/Ground System

The hot (+)/ground (-) system consists of alternating hot and ground wires and operates on the principle of the direct return of electrons at the wire. Insulated wire and L-clamps are used to "jump" and connect wires. Ground wires are connected to the ground rod(s) and the energizer's ground terminal. Hot wires are connected to each other and are connected to the red or "hot" (+) terminal on the energizer.

The hot/ground system overcomes poor soil conditions or grounding issues by providing a return for the electrons through additional grounded wires. Rather than relying on ideal soil conductivity conditions, this system utilizes a direct return at the fence wire. The animal must touch both the hot wire and the ground wire simultaneously to receive a full shock from the energizer.

Permanent predator exclusion fences should all be hot/ground systems in order to ensure 100% effectiveness throughout the year regardless of the soil or weather.

This five-wire electric fence was constructed near Ovando, Montana to deter grizzly bears (below).



Bullnose insulators (white plastic) are used on the hot wires only. The ground wires can touch the fence post and are connected to the fence's ground system.

Note that the ground and hot wires alternate. Care should be taken to make sure that the space between hot wires isn't large enough to allow predators to slip through the fence. In general, hot wires should not be more than 12 to 15 inches apart. The lowest wire should be located approximately 6 to 7 inches above the ground.



***Montana Fish,
Wildlife & Parks***

Bears and Electric Fencing:

**A starter's guide for using
electric fencing to deter bears**



Written by Kim Annis, MFWP Bear Management Specialist

April 2010

TABLE OF CONTENTS

Introduction.....	2
How Electric Fencing Works	2
Getting Started.....	3
Energizers.....	4
How much “power” do you need?.....	4
Plug-in or battery operated?.....	4
Grounding Systems.....	4
All-hot fences.....	5
Hot/ground fences.....	6
Wire and Panels.....	7
Posts.....	9
Fence Testers.....	9
General Specifications.....	9
Application Ideas.....	10
Tips.....	10
Resources.....	11


INTRODUCTION

A properly constructed electric fence is safe for people and pets and has proven to be effective at deterring bears from apiaries (beehives), fruit trees, gardens, livestock pens, rabbit hutches, garbage containers, dog kennels, chicken coups, compost piles, storage sheds, along with numerous other uses. There is an abundant variety of applications and effective fencing designs for deterring bears. Design, construction and proper maintenance will determine the effectiveness of your electric fence.

Safety is always a concern when using electrified equipment. Modern electric fence energizers have been shown to be safe for humans, animals and vegetation. The pulse rate of a modern energizer is so quick that they cannot generate enough heat to start vegetation on fire. While touching an electrified fence is unpleasant, modern energizers are safe to use around pets and children.

HOW ELECTRIC FENCING WORKS

When an animal touches an electrified wire and the ground simultaneously, the electricity passes through them, into the soil, to the ground rod and back to the ground terminal of the energizer. The circuit is then completed and the animal receives a shock (Fig 1.). If too few grounding rods are placed, if the grounding rod(s) is not deep enough, or if soil is generally dry, the electricity will not find the path back to the energizer and the animal will receive little or no shock.

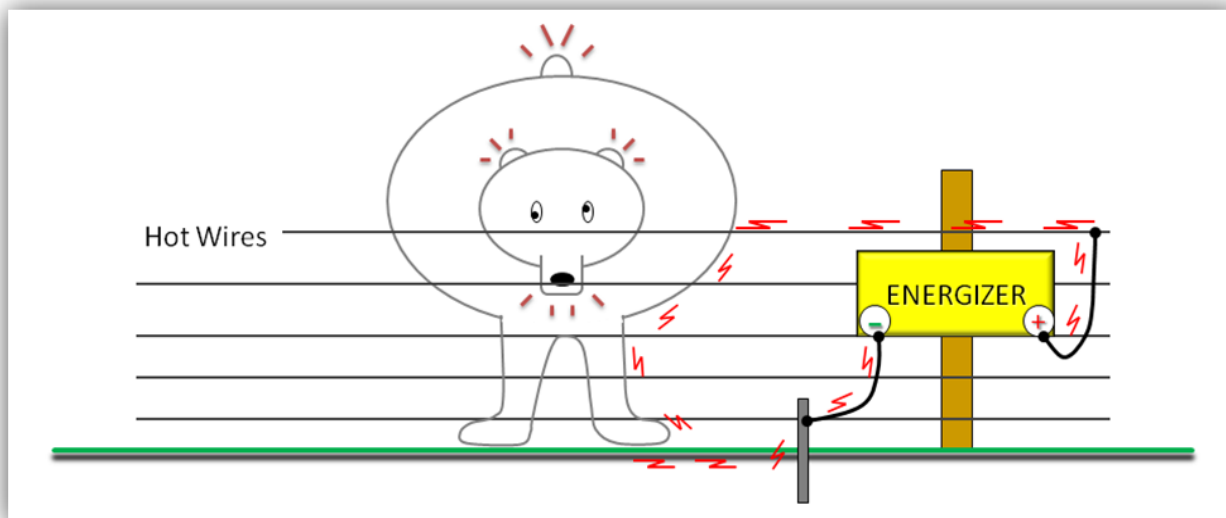

Bears, and other non-jumping animals, will require a fence design that they cannot climb through or go under. This generally requires using multiple electrified wires (5 or more), a combination of electrified wires and an existing fencing, or electrified wires and rigid wire panels.

Getting Started

A few things to consider before starting:

Is your need for an electric fencing temporary (seasonal) or permanent (year round)? The answer will determine some of your material choices (i.e. aluminum wire vs poly-wire, wooden posts vs T-posts, etc.).

How big is the area you want to fence? Does it measure in feet, acres, or miles? Measure to determine how powerful of an energizer you will need (i.e. 1-14 joules) to cover the distance of large acreages (and the proper gauge of aluminum wire that will be needed to prevent resistance), compared to an 0.7-1.0 joule energizer for smaller designs.

Prior to purchasing materials, check with your local wildlife biologist, or electric fencing retailer, for information on products that are appropriate for excluding bears.

The primary components of electric fences are:

1. Energizer
2. Grounding system
3. Wire
4. Posts
5. Fence tester

There are other components that may be necessary for your fence, such as gate handles, drive through gates and on/off throw switches. These can be added as needed for your particular fencing design.

1. Energizers

Energizers (also called chargers or controllers) are the power source for the electric fence. Energizers come in a wide variety of makes and models. The appropriate energizer depends on what type of animal is being controlled and how large of an area it needs to cover. Energizers store energy and deliver very short pulses of electricity, about one pulse per second, through the fence system.

How much “power” do you need?

An energizer's *stored energy* is measured in joules, which is similar to a horsepower rating in motorized engines. **The joule rating is the most important factor when choosing your energizer.** Make sure that the energizer has the appropriate joule rating for the animal you are trying to exclude. For example, if you are trying to keep bears out, they will require a joule rating of greater than 0.7 for the electric fence to be effective, while horses may only require 0.1 joules to keep them in.

For small areas, such as gardens, 2-3 fruit trees, compost piles, dog pens, chicken coups, etc., you will generally only need to make sure that your energizer has a joule rating between 0.7 – 1.0. However, for larger areas, such as livestock pastures or orchards, you will need to make sure that your energizer is also powerful enough to deliver its charge over the longer distance. For example, an energizer that is powerful enough to deliver its charge through 20 acres of fencing will not necessarily also have a joule rating of 0.7-1.0 that is needed to exclude bears.

Plug-in or battery operated?

There are 2 types of energizers available: plug-ins and battery operated. A typical plug-in energizer directly connects into a 110 volt outlet (standard household current). Battery operated energizers receive their power from 12-volt deep cycle or marine batteries.

Wherever possible, plug-in energizers are recommended for electric fencing. They require less maintenance, receive a consistent output of power, and are typically less expensive than their battery operated counter-parts.

Battery operated energizers can be just as effective as plug-in units. However, they require more maintenance, as the battery must be regularly recharged for the fence to remain effective. Solar-panels can be added to a battery operated energizer to provide the battery with a continual source of power. However, the location must receive enough sunlight to ensure that the solar panel can provide a sustainable charge for the battery. The solar array must also be powerful enough to charge the deep cycle batteries that are used.

2. Grounding System

Grounding is the second most important component in the design of an electric fence. Without proper grounding, the fence will fail and the energizer can be damaged in the process. You will need one ground rod for every joule of your energizers output.

Ground rods should be driven in the soil near the energizer to a minimum depth of 6 feet. In very dry soils, the rod may need to be driven even deeper than 6 feet. It is necessary to drive ground rods as deep as possible so that the rod is in contact with the greatest amount of surface area, adequately allowing the current to return to the energizer.

In locations where it is too difficult to drive a ground rod at least 6 feet deep, there are several options. A ground rod can be driven at a shallow depth using a steep angle, or several rods can be placed in a series, 10 feet apart. Frequently watering the soil around the ground rod may also allow for the adequate return of energy back to the energizer.

Ground rods should be $\frac{1}{2}$ " - $\frac{3}{4}$ " in diameter and made of galvanized steel. Non-galvanized metals rusts quickly and cause resistance, reducing its effectiveness. Painted rods, t-posts or rusted metal are not effective ground rods, as the paint and rust will act as a barrier. A ground rod clamp will be needed to attach the wire running from the energizers ground terminal to the ground rod.

There are 2 types of grounding systems:

- A) All-Hot
- B) Hot/Ground

A) All-Hot Fences

In an all hot fencing system, all of the fence wires are electrified, or hot. They are all connected to each other and to the positive (+) or hot terminal on the energizer. The negative (-) or ground terminal is only connected to the grounding rod. The animal only needs to be standing on the ground and to touch one of the wires simultaneously in order to receive a shock (Fig 2.).

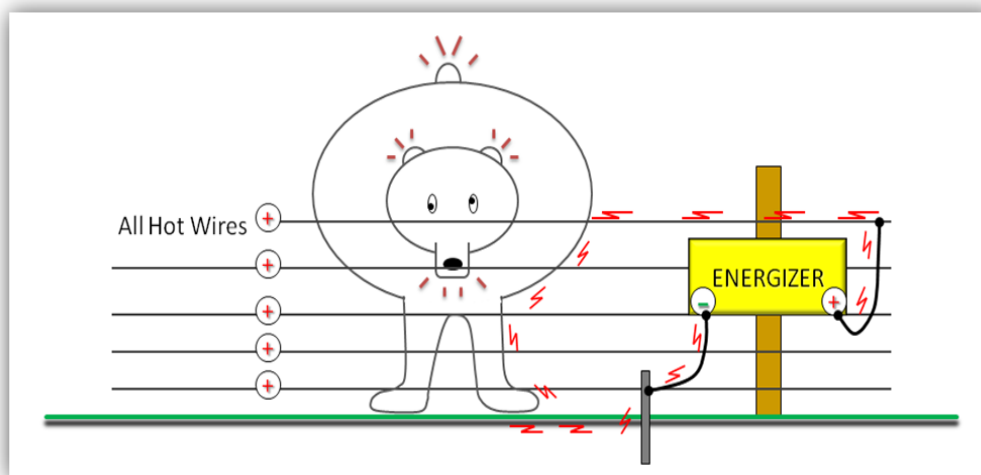


Figure 2. An all-hot electric fence design. All wires are connected to each other and to the positive terminal on the energizer.

This all-hot design is only good for areas with damp or moist soil that will provide sufficient grounding. Areas that are frequently watered, such as gardens or fruit orchards, or areas that are seasonally fenced during rainy/wet times of the year are suitable for this design.

When designing fences to exclude bears, or other predators, it is important to place enough lines so that the animal cannot pass under, through or over them. At least 5 lines are recommended in an all-hot design, placing the lines close enough together so an animal cannot pass between them without receiving a shock. It is also important to place the wire closest to the ground low enough so that an animal cannot easily dig under it without also receiving a shock.

B) Hot/Ground Fences

A hot/ground fence consists of alternating hot (+) and ground (-) wires (Fig 3.). All hot wires are connected to the positive terminal on the energizer and all ground wires are connected to the negative (ground) terminal on the energizer. The energizer's negative terminal must also be connected to the grounding rod. Rather than relying on the soil to complete the electrical circuit, this design directly returns the current to the energizer through the wires. The animal must touch both a hot and a ground wire to receive a full shock. This fence design should be used in dry or rocky soils, in locations where there are poor grounding conditions, and in permanent, year-round fence designs. The bottommost and topmost wires should always be hot (+), therefore you will always need an odd number of wires in a hot/ground design.

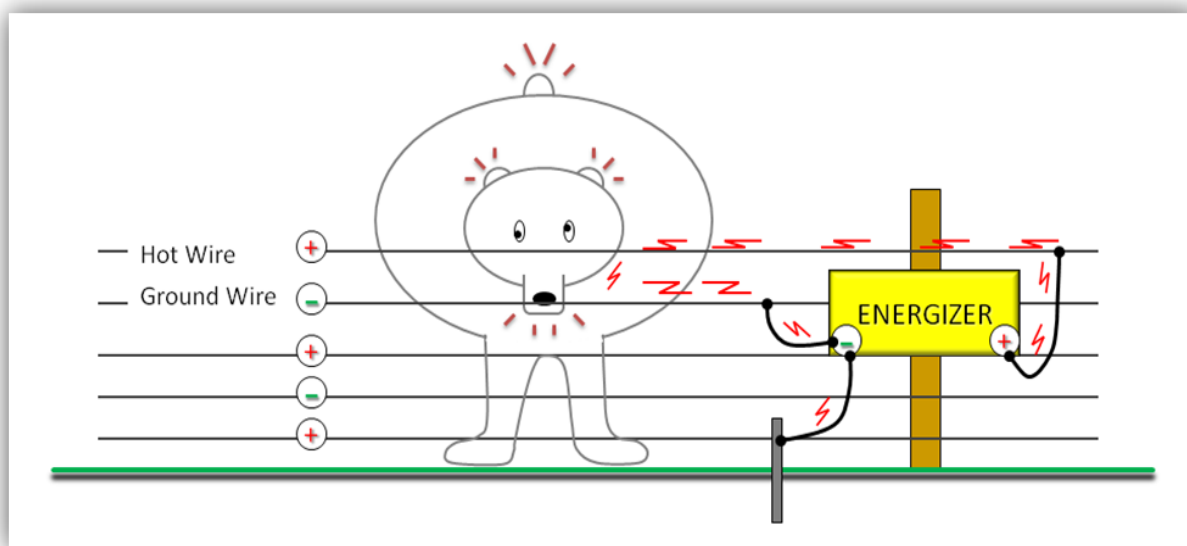


Figure 3. A hot/ground electric fence design. All hot wires are connected to each other and to the positive terminal on the energizer. All ground wires are connected to each other and to the negative terminal of the energizer.

Remember that it is important to place enough lines so that an animal cannot pass under, over, or through them without receiving a shock. When using a hot/ground design, it's best to use at least 5 wires. This way the alternating hot (+) and ground (-) wires are close enough together for the animal to receive an effective shock when it tries to pass through.

There are many fence designs that can be created based on these two different wiring systems. *Just remember, no matter which wiring system or fencing design you chose, you must always connect the energizer to a sufficient grounding rod for the fence to work properly and to prevent damage to the energizer.*

3. WIRE (and Wire Panels)

All metal wire should be used for permanent electric fencing and can be found in galvanized smooth steel or aluminum. Steel wire is more difficult to work with, as it is typically used in high-tensile fencing designs, but it is strong and durable. Aluminum wire is easy to use and more conductive than steel wire, but will break with repeated bending. Steel wire should be at least 14Ga or 12Ga, and aluminum wire should be at least 14Ga.

For temporary, seasonal or portable electric fencing, you may consider using a type of “poly” wire (Fig 4). “Poly” wire consists of multi-stranded aluminum or stainless steel wire braided within polyethylene. “Poly” wire is flexible yet strong and can be unrolled and re-rolled multiple times without breaking. Because of electrical resistance, it is recommended that your “poly” wire has at least 9 strands of wire imbedded within the polyethylene. “Poly” tape, which is flat, is usually less effective for bear exclusion and is not recommended.



Figure 4. Two styles of electrical fencing “Poly” wires.

Using rigid wire panels

Depending on the size of the fence enclosure and application, rigid wire (cattle or hog) panels can be used in addition to, or instead of traditional wire.

For example, panels can be raised off the ground by attaching them to fiberglass posts. The panels are attached to each other and to the positive terminal of the energizer. The posts insulate the panels to ensure that they remain “hot” (Fig 5.). Or the raised panels can also be used as the grounded wire in a hot/ground fencing system (Fig 6.).

In very dry soil, hard ground, rock or pavement, additional panels can be laid on the ground beneath any raised panels to ensure grounding of the animal. These on-the-ground panels should be connected to the ground terminal of the energizer.

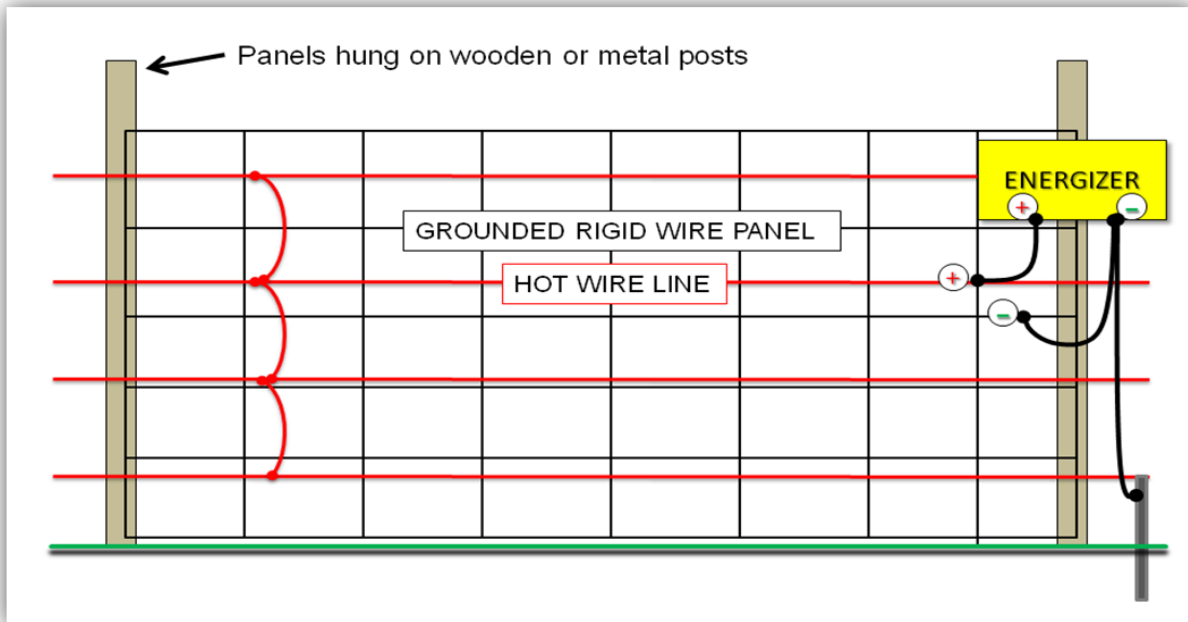


Figure 5. Electrified raised rigid wire panel

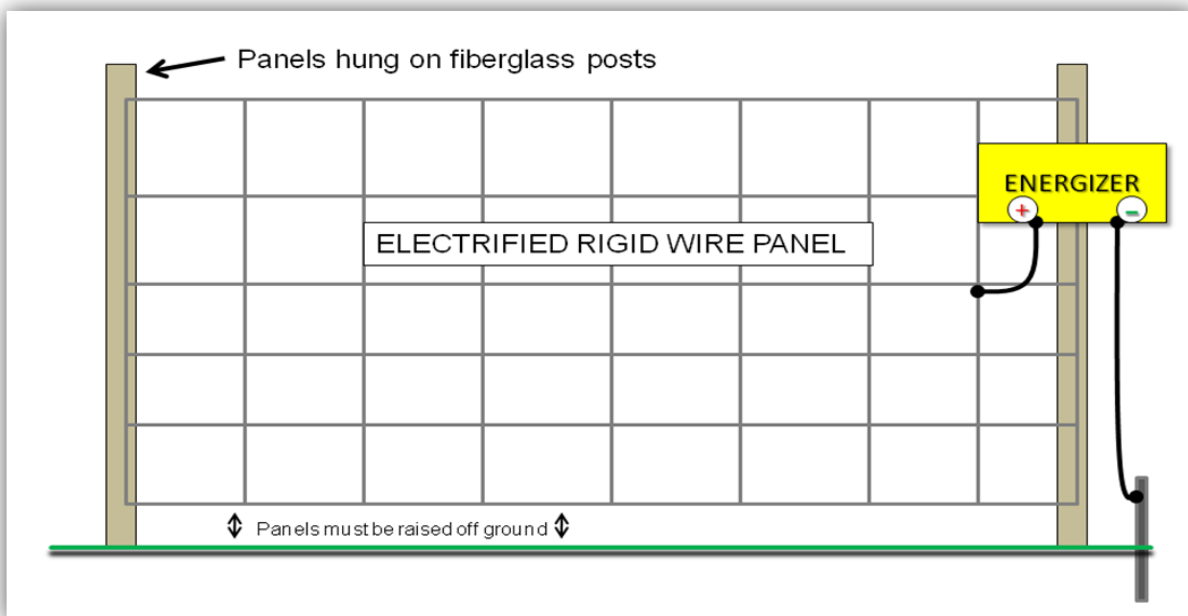


Figure 6. Grounded rigid wire panel with 3 offset electrified hot wires

4. POSTS

There are a number of different post types available for electric fencing, the most common being wooden, metal T-posts, fiberglass and plastic. Wooden and metal posts are typically more expensive and require the added expense of insulators, however they are more durable than plastic and fiberglass posts and require less overall maintenance.

The primary difference between permanent and temporary fencing is the choice of fence posts and the extent to which they are installed. For stable, lower maintenance, permanent, year-round fencing, treated wooden posts are the best choice. Less permanent, year-round fencing can be constructed using fiberglass or T-posts with wooden posts in corners for stability.

Temporary, seasonal or portable fences can be effective and economical, and can be taken down for storage when not in use. They can be constructed with T-posts, fiberglass posts, or step-in-the-ground plastic posts and have a wide range of applications. However, they will not hold up as well, or as long, as fencing that uses rigid posts.

Wire insulators must be used to secure hot (+) wires strands to wooden and metal posts to prevent the wire from grounding out. Plastic and fiberglass posts do not need insulators for the hot (+) wires and may be directly attached to the posts. In hot/ground fence designs, the ground (-) wires may be directly attached to the posts.

5. FENCE TESTERS

An important part of regular electrical fence maintenance is the use of an electric fence *voltage meter*, commonly referred to as a fence tester. This small device not only tells you if your energizer and grounding system is working, it tells you the amount of current passing through your electrical wires. This is not the same as a *voltage reader*, which only tells you *if* electric current is passing through the wire, not *how much*. However, to effectively deter bears, it is the *how much* that matters. Bears require a minimum voltage requirement of 6,000 volts, or more, passing through each hot (+) wire.

Fence testers should be used to test if your fence is functioning properly immediately after setup and then periodically thereafter as part of regular maintenance.

Electric fence specifications for deterring grizzly and black bears

Minimum Joule Requirement:	0.7 or more
Minimum Voltage Requirement:	6,000 or more
Minimum Fence Height:	4 feet
Minimum # wires	5

Some electrical fencing applications for excluding bears

Apiaries	Livestock pens
Garbage containers/dumpsters	Dog kennels
Compost piles	Chicken coups
Orchards/fruit trees	Gardens
Sheds/storage areas	Birdfeeders

Some tips to improve the effectiveness of your electric fence

The joule rating is the most important factor when choosing your energizer.

Grounding is the second most important component in the design of an electric fence.

If using a 12-volt battery operated energizer, check that your battery is charged every week. Make sure battery terminals are free of corrosion and are still connected to the fence and grounding rod.

Check that hot wires are not grounded out by tall vegetation, fallen branches, broken insulators, etc.

Check for poor wire connections in locations where wire has been spliced or where wire has become loose.

When protecting a structure (shed, rabbit hutch, etc.) the fence should be placed 3-5 feet away instead of directly on the structure. This way the bear encounters the fence before reaching the attractant.

When protecting fruit trees, be sure to place the fence far enough away so that all fruit falls within the electrical fence instead of outside it.

Check voltage on every hot (+) wire with electric fence voltage tester, particularly in areas furthest from the energizer, weekly.

Place plastic electric fencing signs around the perimeter of your fence to improve visibility and warn other people.

RESOURCES

Montana Fish, Wildlife & Parks

<http://fwp.mt.gov/wildthings/livingWithWildlife/BeBearAware>

Contact a MFWP bear manager near you:

Region 1:	Libby	Kim Annis:	406-293-4161
	Kalispell	Tim Manley:	406-751-4585
	Kalispell	Erik Wenum:	406-751-4588
Region 2:	Missoula	Jamie Jonkel:	406-542-5508
Region 3:	Bozeman	Kevin Frey:	406-994-3553
Region 4:	Choteau	Mike Madel:	406-466-5100

Living With Wildlife Foundation

<http://www.lwwf.org>

2009 Practical Electric Fencing Resource Guide: Controlling Predators

Interagency Grizzly Bear Committee (IGBC)

<http://www.igbconline.org>

Temporary Fencing

Temporary electric fencing is an effective and economical way to deter predators from various attractants and can be taken down quickly and easily when no longer needed. The only difference between temporary electric fencing and permanent electric fencing is the type of fence post used and the extent to which the posts are installed in the ground. There seems to be almost no limit to the number and types of temporary electric fence configurations that can be used to address a wide range of applications, including some that are pretty unusual.

Typically t-posts or rigid wire cattle panels are used to construct a temporary electric fence enclosure. Both install quickly, don't require significant digging or bracing, and can be easily removed and stored for future use. Temporary fencing is usually cheaper to install but doesn't hold up as well as fencing that utilizes wooden posts and H-braces.

This doesn't necessarily mean that temporary electric fencing will last only a short time however. Temporary electric fence enclosures constructed around apiaries, compost piles, sheds and sheep pens have been known to last throughout the season, and in warmer climates, for a year or more.

The fence to the right shows how cattle panels can be secured to t-posts and electric "Turbowire" attached to the fence with offset brackets. This design uses three wires in an all hot or hot/ground system.



This photo shows a temporary fence design that uses rigid wire cattle panels. The fence is an 8' X 8' enclosure that can be expanded for many uses by simply adding additional cattle panels.

The panels on the ground are grounded to the energizer, while the panels that are attached to the fiberglass posts are insulated by the fiberglass posts and are therefore "hot."

This design uses 16' cattle panels and fiberglass posts. The panels are electrified and insulated by the fiberglass posts. The electrified panels are held off the ground by wire clips.

The panels on the ground are grounded to the energizer's ground rod to implement the hot/ground system.

This system is easily constructed, inexpensive and has been effective in keeping bears out of compost piles, dumpsters, and away from fruit trees.



Temporary Fencing (cont.)



Temporary electric fencing has also been used to secure lure that was used as bait for trapping grizzly bears in Northwestern Montana.

The lure barrels were stored in the back of the truck while being used for the project.

The photo on the left shows how electric fencing was used to secure the lure.

Photo courtesy of Derek Reich

Bear management specialists in Montana are also currently working on ways to use temporary electric fencing to prevent bears from staging on train tracks after large-scale grain spills. More information on this application will be provided in updates to this resource guide.

Portable Electric Fencing

Portable electric fencing is an effective way to secure your backpacks, cooler, campsite and/or game carcass. Studies in Wyoming and Montana have demonstrated that electric fences, when properly constructed and functioning, can be very effective in deterring bears (Brian DeBolt, Wyoming Game & Fish, personal communication).

Several companies sell portable electric fencing that can be packed into the backcountry or set up anywhere there is something that might attract bears. The fences are easy to set up, relatively inexpensive, and can be easily taken down when the bears are hibernating or the attractant has been removed.

Photo courtesy of Patti Sowka





Hot (+) leads (usually red in color) can be used to connect strands of wire or polytape. Leads can be attached to each strand to make the fence "all hot" or to alternating strands for a hot/ground system.

The picture below shows the leads attached to every other strand thus making the fence alternating hot (+) and ground (-). This design is very effective when the ground is dry. This design also tends to be more effective in delivering a shock to an animal with dense fur such as a bear or a wolf.



When using an alternating hot (+) and ground (-) system, it's best to use at least a 6-strand fence. An 8-strand alternating hot-ground fence is recommended when trying to exclude predators, including bears.

An alternating hot (+) and ground (-) fence delivers a maximum shock since the animal is more likely to touch the hot and ground wires at the same time. This guarantees a full earth contact and transfer of the electric shock.



This photo shows another example of an easy portable electric fence design utilizing welded wire cattle panels and fiberglass posts. These wire panels are available at many feed stores and can be used when a fence has to be constructed quickly.



This photo shows an example of a portable electric fence that was used by a hunter in Alaska to deter bears from game meat. Portable fences such as this one are currently being evaluated for deterring bears from game carcasses and other attractants.

Photo Courtesy of Montana Fish, Wildlife & Parks

Portable Electric Fencing Kits (Pre-Engineered Kits with all of the Necessary Components)

Fi-Shock

5360 N. National Drive
Knoxville, TN 37914-6695
865-524-7380
www.fishock.com
"Portable Paddock"

Gallagher

130 W. 23rd Ave.
P.O. Box 7506
North Kansas City, MO 64116
1-800-531-5908
www.gallagherusa.com

UDAP Industries Inc.

P.O. Box 10808
Bozeman, MT 59719
406-763-4242
www.udap.com
"Bear Shock Lightweight Electric Fence"

Kodiak Wildlife Products Inc.

#108, 104 Kananaskis Way
Canmore, AB T1W 2X2
(866) 356-3425

Zareba Systems

Ellendale, MN 56026
1-800-272-9877
www.zarebasystems.com
Kwik Korral and EZEE Corral

Margo Supplies Ltd.

403-654-1932
www.margosupplies.com

Premier I

2031 300th St..
Washington, IA 52353
800-282-6631 or 319-653-7622
www.premier1supplies.com

Parmak Precision

2000 Forest Ave.
Kansas City, MO 64108
www.parmakusa.com

Water Strider

263 Three Pond Drive
Hamilton, MT 59840
406-375-0251
www.waterstrider.com

Recreation

Tech Tips

United States Department of Agriculture
Forest Service

Technology & Development
Program

November 2005

2300

0523-2307-MTDC

Specifications for Portable Mesh Electric Fences Used as an Alternative Method for Food Storage


Dick Karsky, Project Leader; Kim Barber, Rocky Mountain Region; John Gookin, National Outdoor Leadership School; Gary Kees, Project Leader; and Jim Claar, Northern Region

Since 1995, persons using any portion of the National Forests in the Northern Continental Divide Grizzly Bear Ecosystem (NCDE) have been required to store food, garbage, and other attractants (such as horse feed) in a bear-resistant manner. A portable electric fence was evaluated to determine whether it was effective in keeping bears away from stored food (figure 1). The NCDE includes

some wilderness and nonwilderness portions of the Flathead, Lewis and Clark, Lolo, and Helena National Forests south and west of Glacier National Park.



Figures 1—This portable mesh electric fence is a potential alternative for storing food, garbage, and other attractants in bear country. The fence kit weighs just 9 pounds with the diagonal braces and 7 pounds without the braces. The posts are 42 inches long.

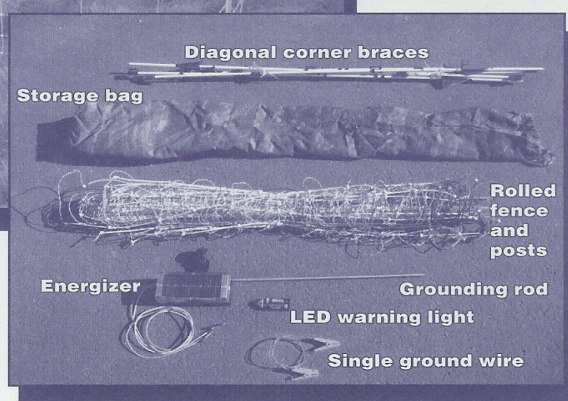

For additional information, contact: Dick Karsky, project leader; USDA Forest Service, MTDC; 5785 Hwy. 10 West; Missoula, MT 59808-9361. Phone: 406-329-3921; fax: 406-329-3719; e-mail: rkarsky@fs.fed.us

Similar requirements have been in place since 1990 in the Greater Yellowstone Grizzly Bear Ecosystem (GYE). The GYE includes some wilderness and nonwilderness portions of the Beaverhead-Deerlodge, Bridger-Teton, Custer, Gallatin, Targhee, and Shoshone National Forests. The area where these special orders apply is being expanded.

The National Outdoor Leadership School (NOLS) in Lander, WY, developed a portable backpacker fence as an alternative method of storing food in bear country. They have tested different configurations of the fence over the past few years. The fence has failed only a few times, usually because of human error or because animals accidentally ran into the fence at night and knocked it down. The flashing LED lights were added to make the fence more visible.

The Missoula Technology and Development Center (MTDC) and the Northern Region tested these fences during the springs of 2003, 2004, and 2005 when bears were coming out of hibernation. A carcass was placed inside the fence and remote cameras monitored black bears and grizzly bears that visited the sites during the day and night.

Portable mesh electric fence systems are being considered for approval as an acceptable means of meeting the requirement for storage in a bear-resistant manner. The fence kit weighs about as much as a heavy backpacking tent. The complete kit with five diagonal braces weighs 9 pounds. Without the braces, the kit weighs 7 pounds. The energizer alone weighs 1.8 pounds and the fence alone weighs 4 pounds.

This document does not authorize the use of these fence systems to meet requirements of the various Forest Service food storage orders.

Several other portable fence systems have been tested that did not keep bears out. Energizers and fences that are not listed here must be evaluated by MTDC before approval.

These fences are intended to keep bears away from food, garbage, and other attractants in the backcountry.

They are not intended to protect campers from bears and have not been tested for such uses.

Electric Fence System Requirements

Table 1 summarizes the specifications of the fence system that has been proven effective for food storage. As new components for electric fence systems are developed, they will require testing and approval.

Table 1—Summary of electric mesh fence specifications.

Fence height	Required: 33 inches Recommended: 42 inches
Post length	Required: 42 inches Recommended: 48 inches
Post construction	Required: Polyethylene Recommended: Fiberglass
Strands of stainless steel wire per horizontal wire	Required: 3 Recommended: 9
Number of horizontal wires	Required: 8 Recommended: 12 or more
Horizontal opening in mesh	Recommended: 6 inches or less Maximum: 11 inches
Length of ground rod (earth ground is mandatory)	Required: 1 foot Recommended: 1½ feet
Energizer output	Required: 0.11 joules Recommended: 0.2 joules
Tested peak output voltage (on every hot conductor, with no load other than the fence)	Required: 5,000 volts Recommended: 7,000 volts
Minimum pulse duration (with a 10,000-ohm load applied)	Required: 0.05 milliseconds
Minimum shocks per minute	Required: 35 Recommended: 45
Distance between fence and items inside	Required: 1.5 feet
Readable placard indicating fence is electrified	Required: 1
Maximum fence length	60 feet
LED lights	Required: 2 Recommended: 3

A ground wire return fence (with alternating hot and ground wires) must be used. Mesh with semirigid stays (figure 2a) is recommended to keep the mesh from drooping, which could allow the hot wires to short out against the ground wires below them (figure 2b).

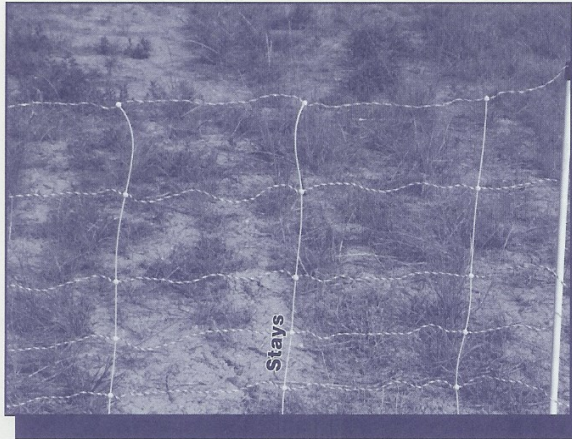


Figure 2a—Semirigid vertical stays (above) are preferred to flexible vertical strands (below) because they prevent hot wires from sagging and shorting out the fence.

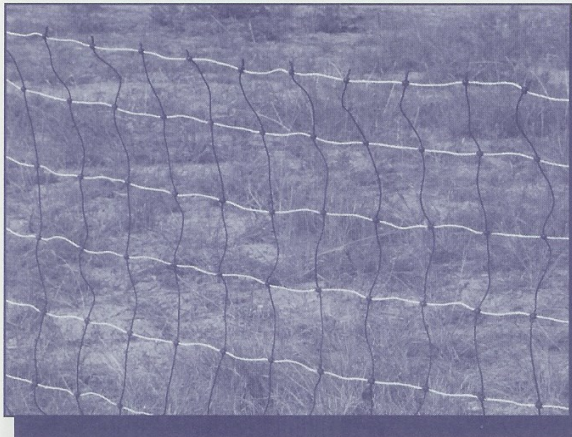


Figure 2b—Unless this fence is kept tight, the flexible vertical strands may allow hot wires to sag, shorting out the fence.

The recommended size for fences is 6 feet per side with five sides for the backpacker version (figure 3) and a maximum of 12 feet per side with five sides for the outfitter's version. The outfitter version must have diagonal braces on the corner posts. It can be created using two backpacker fences.

Flashing LED (light-emitting diode) lights (figure 4) are required on two sides of the fence to prevent persons, stock,

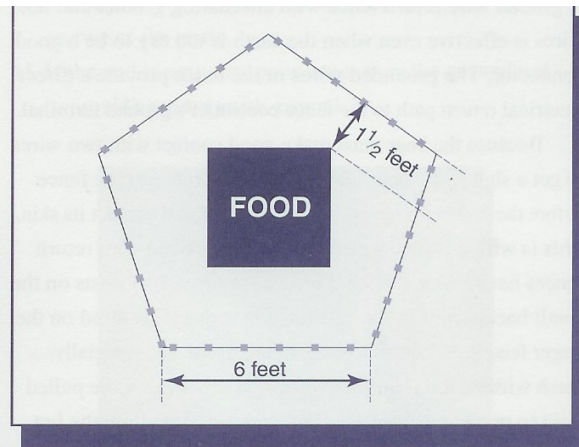


Figure 3—A fence enclosure for backpackers should have five 6-foot-long sides. Food must be stored at least 1½ feet away from the fence. Outfitters needing to protect more food can combine two of these fences to enclose an area with 12-foot-long sides.

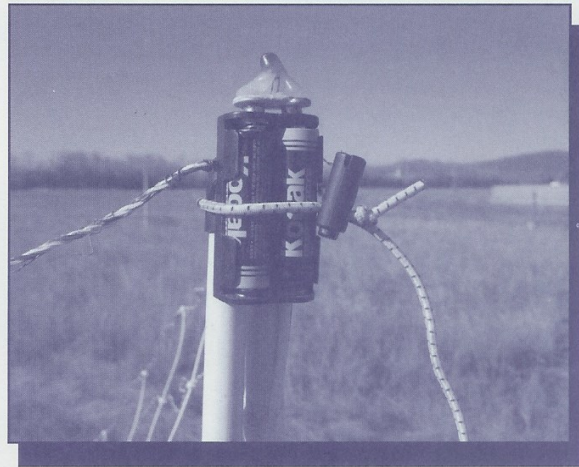


Figure 4—LEDs (light-emitting diodes) attached to two sides of a portable electric mesh fence can warn campers or animals before they touch or run into the fence.

and wild game from running into the fence and knocking it over.

Make sure that the fence's bottom wire is near the ground, so that bears cannot crawl or reach under the fence without getting shocked.

If the fence is installed on wet snow, the snow must be packed down beneath the fence to prevent the snow from shorting out the fence.

A ground wire return fence with alternating ground and hot wires is effective even when the earth is too dry to be a good conductor. The grounded wires in the fence provide a direct electrical return path to the fence controller's ground terminal.

Because the bear must make good contact with two wires to get a shock, the bear may apply some force to the fence before the conductors work through the fur and contact its skin. This is why it is recommended that the ground wire return fences have inside diagonal braces for the corner posts on the small backpacker fence. Diagonal braces are required on the larger fences, (outfitter version, figure 5). Mesh, especially mesh without the semirigid vertical stays, needs to be pulled tight to prevent it from sagging, which could allow the hot wires to short out against the ground wires below them.



Figure 5—Bungee cords can be used to hold diagonal braces against corner posts.

The ground rod provides an electrical circuit using the earth as the return path when the soil is moist. A bear will get shocked when it contacts any hot wire while standing on moist soil or when it touches a hot wire and a ground wire.

Grass and weeds should be clipped or removed around the fence's perimeter so moist vegetation does not contact hot wires, even in windy conditions. Wet vegetation conducts some of the electric current to the ground and will decrease the shock delivered to a bear. Fences that contact wet vegetation

are unlikely to produce the 5,000 volts required. Use a fence tester that indicates voltage on the fence (Gallagher Model G50104 or equal). Place one lead on one of the energized wires and the other lead on a ground wire. If the voltage reading is higher than 5,000 volts, the fence is working properly. If the voltage reading is lower than 5,000 volts, vegetation probably is shorting out the fence. Clear the obstructions and retest. Another possible cause of low fence voltage is a discharged battery.

Installing the Fence

Choose a spot to install the fence where the ground is flat, no trees or brush hang over the fence, and where the fence does not block an established game trail. Gather up and store the fence in accordion fashion by collecting the posts with loops



Figure 6—If the fence mesh has been gathered accordion style, the fence will be easy to install.

of mesh drooped between them (figure 6). To install the fence:

1. Hold the posts and allow the fence mesh to drop.
2. Insert one of the end posts into the ground at your starting point.

3. Insert each of the remaining posts into the ground to lay out the five sides of the fence (figure 3).
4. At the end, push the last post into the ground next to the first post.
5. Reposition individual posts until you are satisfied with the fence's tension and shape.
6. Attach diagonal braces to the fence posts, if required.
7. Ensure that the energized hot wires are on the outside of the posts (figure 7).
13. Use adjustable bungee cords to attach the LED lights on two of the posts.
14. If the soil is very dry, pour water over the ground rod to provide a good earth ground.

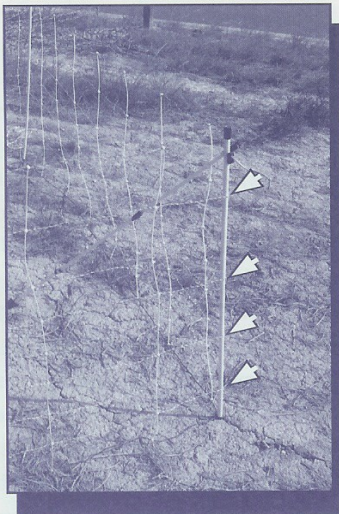


Figure 7—Ensure that the hot wires are on the outside of the fence posts. Otherwise, a bear could knock the post over without getting shocked.

8. Place the energizer next to the posts just inside the fence where animals cannot damage it. Drive the ground rod near the energizer (figure 8).
9. Electrical wires clip to metal tabs crimped on the fence mesh near the end post (figure 9).
10. Connect a separate green (ground) wire from the ground rod to the fence. Attach the energizer's green wire (ground) (figure 8) to the ground rod.
11. Connect the white or red (hot) wire from the energizer to the proper metal (hot) tab on the fence mesh.
12. Connect the green wire (ground) to the proper metal (ground) tab connected to the ground wires on the fence. **CAUTION:** Be sure to connect the hot lead from the energizer to the proper metal (hot) tab on the fence, and the ground lead to the proper metal (ground) tab on the fence or the energizer will not operate.

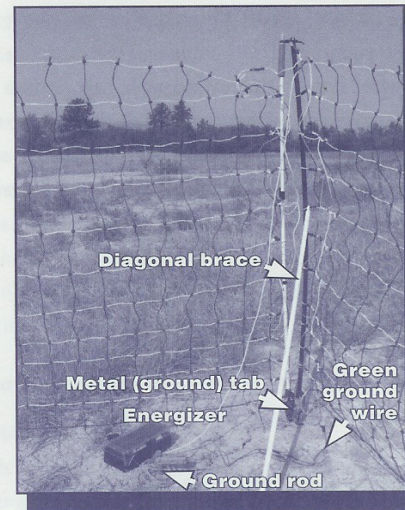


Figure 8—Connect the ends of the fence and attach the energizer to the fence and the ground rod. The ground rod should be at least 1 foot long. If the soil is dry, pour water near the rod to ensure a good electrical ground.

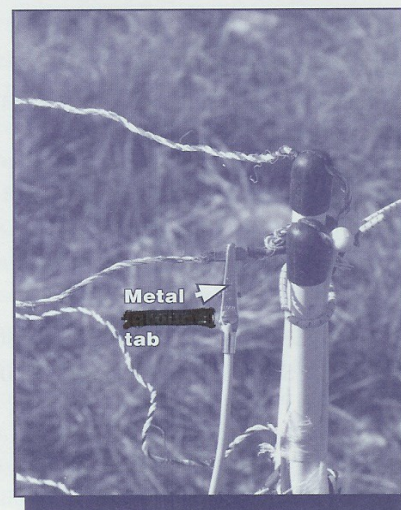


Figure 9—Connect the clips on the leads from the energizer to the hot wire (shown) and ground wires of the fence.

Using the Fence

1. After food has been placed in the middle of the enclosure, connect the fence and turn on the energizer (which must be inside the fence).
2. Use a fence tester that indicates voltage on the fence (Gallagher Model G50104 or equal). Place one lead on one of the energized (hot) wires and the other lead on a ground wire. If the voltage reading is higher than 5,000 volts, the fence is working properly. If the voltage reading is lower than 5,000 volts, food must be stored by another approved means, such as hanging the food properly from a tree.

Removing the Fence

1. Disconnect the energizer and electrical fence connections.
2. Remove LEDs.
3. Remove the diagonal braces, if they were used.
4. Lift each post as you walk down the line.
5. Allow the fence mesh to fold into loops accordion style as you proceed.
6. Lay the fence flat on the ground and ROLL the mesh around the POSTS.

Approved Energizers

Power Innovations (Models: Sureguard S4-Plus, S4, S10, and M-4)

110 Barton Rd. • Lismore, NSW2480, Australia
Phone: 61-2-6628-2000 • Fax: 61-2-6628-2022
Web site: <http://www.sureguard.com.au>
E-mail: help@sureguard.com.au

Gallagher Power Fence (Models: B11, B75, and B80)

18940 Redland Rd. • San Antonio, TX 78270-8900
Phone: 800-531-5908
Web site: <http://www.gallagher.com.au>

Stafix (Models: B0.5 and AN90)

Web site: http://www.stafix.co.nz/stafix_new/

PEL (Models: 901B and 110B)

Web site: http://www.pel.co.nz/pel_new2/

Approved Electric Mesh Fences

J.L. Williams Co. (Models: Electro-Web P-75 and P-89)

P.O. Box 209 • Meridian, ID 83680

Phone: 800-843-3702 • E-mail: freeinfo@safefence.com

Web site: <http://www.safefence.com>

Kencove Farm Fence, Inc. (Models: NGS, NSG, and NSG12X)

344 Kendall Rd. • Blairsville, PA 15717-8707

Phone: 800-536-2683 • E-mail: fence@kencove.com

Web site: <http://www.kencove.com>

Premier 1 Supplies (Model: Electronet)

2031 300th St. • Washington, IA 52353

Phone: 800-346-7992 • E-mail: info@premierlsupplies.com

Web site: <http://www.premierlsupplies.com>

Recommended Fence Improvements

The fence's alligator clips and metal tabs allow electrical connections to be made improperly. If the fence had polarized connectors (figure 10), they would always connect hot to hot, and ground to ground properly.

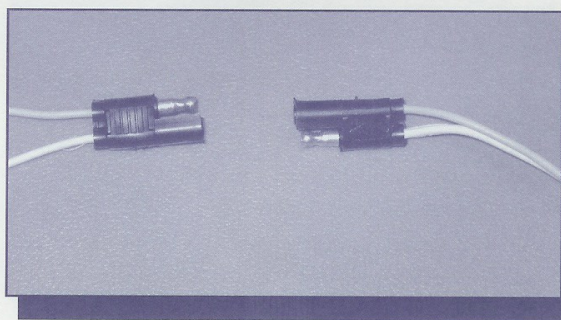


Figure 10—Polarized connectors could prevent improper electrical connections.

Maintenance Tips

VOLTAGE

- Clip grass, weeds, and branches around the fence's perimeter so moist vegetation will not contact hot wires, even in windy conditions. Retest the fence's voltage.

- Clip the hot lead to the solid metal connector rather than a piece of plastic twine and ensure that the ground lead is connected to the ground clip on the fence. A separate wire should connect the ground clip to the ground rod.
- Locate a good ground by probing with the ground rod to find damp soil.
- Clean all battery contacts with a pencil eraser.
- Use dry silicone on the charger in humid areas. Silicone will reduce the possibility that moisture will allow the high voltage current to arc to the case.
- During cold conditions, use new batteries and replace them more often.
- Solar energizers, such as the Sureguard S4-Plus, may not keep the batteries fully charged from November through February, when days are short and temperatures are low.
- **Make sure that the ground and hot leads are connected properly or the fence will not operate.**

CARE

- Care for the charger the way you would care for a cell phone, radio, GPS receiver, or other electronic device.
- Place the charger in a dry, foam-padded case before transporting it.
- Clean the battery contacts with a pencil eraser as needed.
- Keep your charger dry. If it falls in water, open the charger and dry it in the sun or expose it to a breeze before turning it on.

TROUBLESHOOTING

- Are the batteries holding a charge? Use new batteries to see whether they fix the problem.
- Is anything corroded? If so, try cleaning the battery contacts with a pencil eraser.
- Are the hot and ground lead wires connected properly?
- Are the wires intact?
- Is the charger dry? If it looks wet, try opening the charger and drying it in the sun or exposing it to a breeze before turning it on.
- Does the ground wire go from the ground clip to the ground stake?
- Does the red (hot) wire go from the energizer to the white (hot) wire tab on the fence?
- Is anything inside obviously broken or disconnected because the charger has been dropped?
- Have you tried tinkering? If you do, remember that the first rule of intelligent tinkering is not to lose any parts.

Acknowledgments

The authors would like to thank:

- NOLS staff for developing this fence and providing materials and data for the laboratory and field tests.
- Mark Hinschberger, Shoshone National Forest, for his work with NOLS in developing the backpacker fence and in obtaining funding.
- Dan Carney, Blackfoot Tribe, for field testing prototype fences and sharing his knowledge of bear behavior.
- Mike Madel and Mike Maples of the Montana Department of Fish, Wildlife, and Parks in Choteau, MT, for allowing us to test the prototype fence on the Rocky Mountain Front and helping us monitor the test sites.
- Brian Castaldi, MTDC, for helping install the camera monitoring system.

About the Authors

Dick Karsky has been program leader of forest health protection, GPS, and the air portion of the watershed, soil, and air program since the fall of 1999. Dick has been a project leader at MTDC in the resource areas of GPS, range, cooperative forestry, engineering, fire, reforestation and nurseries, residues, recreation, and forest health protection. He received a bachelor's degree in agricultural engineering from North Dakota State University and a master's degree in agricultural engineering from the University of Minnesota. He worked for private industry before coming to the Missoula Technology and Development Center in 1977.

Kim Barber has been the grizzly bear and wolf biologist for the Rocky Mountain Region of the Forest Service since 1992. Kim, who is based in Cody, WY, represents the six National Forests in the Greater Yellowstone Area (GYA) on the Interagency Grizzly Bear Study Team, leads the Grizzly Bear Cumulative Effects Modeling Team for the GYA and serves on various technical teams for the Interagency Grizzly Bear Committee. He has also worked for the Forest Service in Utah, Nevada, and Alaska. He received a bachelor's degree in zoology from Weber State College and a master's degree in wildlife management from Utah State University.

John Gookin is the curriculum and research manager and a senior instructor at the NOLS in Lander, WY. He received a bachelor's degree in biology and environmental studies from

Lake Forest College in Chicago, IL. He taught high school sciences and was a U.S. Marine before joining NOLS in 1981.

Gary Kees is a project leader specializing in reforestation and nurseries, facilities, recreation, and GPS projects at MTDC. He received his bachelor's degree in mechanical engineering from the University of Idaho. Before coming to MTDC in 2002, Gary worked for the Monsanto Co. in Soda Springs, ID, as a mechanical/structural engineer and project manager.

Jim Claar joined the Forest Service in 1989 and has helped

establish standards for food storage and other techniques for living and recreating in bear country. He has been the carnivore program leader for the Northern Region since 1999. Jim also serves as the team leader for the national lynx biology team, team leader for the interagency wolverine biology team, and regional lead for interagency gray wolf coordination. He has a bachelor's degree in wildlife biology from the University of Montana and a master's degree in wildlife management from the University of Idaho.



Library Card

Karsky, Dick; Barber, Kim; Gookin, John; Kees, Gary; Claar, Jim. 2005. Specifications for portable mesh electric fences used as an alternative method for food storage. Tech Tip 0523-2307-MTDC. Missoula, MT: U.S. Department of Agriculture, Forest Service, Missoula Technology and Development Center. 8 p.

Describes the specifications of portable electric fences for storing food, garbage, and other attractants (such as horse feed) in the Northern Continental Divide and Greater Yellowstone Grizzly Bear Ecosystems. Those ecosystems include

portions of National Forests near Glacier and Yellowstone National Parks in Idaho, Montana, and Wyoming. Special orders have been issued for these areas requiring that food, garbage, and other attractants be stored in a bear-resistant manner. This tech tip specifies the portable electric fences and energizers for this use and how they must be installed.

Keywords: backcountry, black bears, camping, energizers, food, garbage, grizzly bears, refuse, regulations, special orders, storage, Ursidae

Additional single copies of this document may be ordered from:

USDA Forest Service, MTDC
5785 Hwy. 10 West
Missoula, MT 59808-9361
Phone: 406-329-3978
Fax: 406-329-3719
E-mail: wo_mtdc_pubs@fs.fed.us

Electronic copies of MTDC's documents are available on the Internet at:

<http://www.fs.fed.us/t-d/> (Username: t-d, Password: t-d)

For additional information about portable electric fence specifications, contact Dick Karsky at MTDC.

Phone: 406-329-3921
Fax: 406-329-3719
E-mail: rkarsky@fs.fed.us

Forest Service and Bureau of Land Management employees can search a more complete collection of MTDC's documents, videos, and CDs on their internal computer networks at:

<http://fsweb.mtdc.wo.fs.fed.us/search>



The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of

program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410, or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

How to create an "electrified unwelcome mat"


This series of photos shows how cattle and hog panels are used with horse stall mats to construct an electrified pad. Electrified pads, which we call "electrified unwelcome mats," can be handy for keeping bears off of porches or decks, away from doors, out from underneath bird feeders, or away from dumpsters. Keep in mind that anything, or anyone, who steps onto the mat also receives the "unwelcome" message! They probably would not be appropriate for areas where a lot of people or pets walk. They are good for modifying the behavior of bears that have become repeat offenders and routinely visit the same place over and over.



The 34 inch hog panel is electrified and insulated by the rubber stall mat. The 52- inch cattle panel is the ground for the system in this example.



Use plastic ties to stabilize the hog panel on the mat. Drill holes in the mat and secure the mat to the hog panel by tying the two together with plastic "zip" ties, baling twine or wire. This will prevent the wire panel from shifting off of the mat.

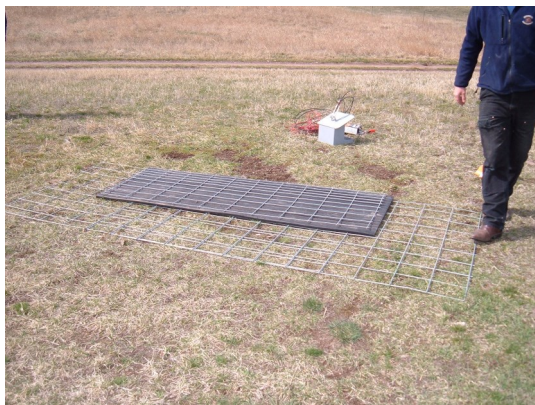

This design has several practical applications including:

- The entrance to a deck or patio
- The entry to a granary or feed shed.
- Blocking off a garbage storage area.

Note that a rubber-tired vehicle can drive over this system eliminating having to open or close gates.

COLORADO DIVISION OF WILDLIFE

Unwelcome Mats

Help Keep Bears Wild

Check Regulations Before Installing an Unwelcome Mat

Please check your homeowner's and community's regulations to make sure unwelcome mats are permitted in your area. As with electric fencing, you should put up a sign letting human visitors know that an unwelcome mat is in use.

How to Make an Unwelcome Mat

Unwelcome mats must be large enough to keep a bear from leaning from one edge and reaching a door or window. Ideally they should extend past the sides of the door or window a minimum of two feet. A 4' x 4' sheet of plywood will protect a single doorway; a 4' x 8' will protect most patio and double doors and windows.



© JIM TIFFIN


It's very important that unwelcome mats be made to black bear specifications; some designs you might find on the Internet are intended for grizzly bears, which are generally considerably bigger than black bears and have bigger paws and longer claws. A black bear can be seriously injured by spikes or nails that are too long or spaced too far apart.



Use full or half sheets of the thickest plywood available. Nails should be long enough to stick out of the wood $\frac{3}{4}$ - 1". Nails should be nailed into the board approximately 2" apart. Drawing a grid on the board makes it easier to stay on track.

How to Make an Electric Unwelcome Mat

Safe, effective bear unwelcome mats are easily constructed from materials available from Feed or Farm and Ranch supply stores. A properly constructed, installed and maintained electrified unwelcome mat will deliver a short, non-lethal, deterring shock when the bear steps on it. Construction time is 1-2 hours depending on how handy you are.

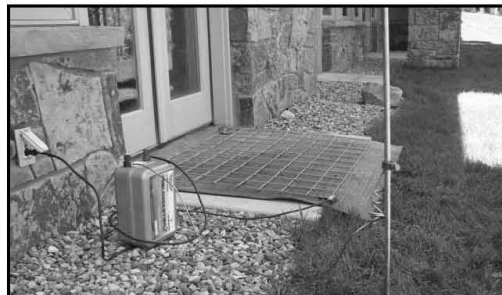

© KEVIN WRIGHT/DOW

Electric Unwelcome Mat Materials List:

- Heavy gauge, 4"x 4" square mesh wire panel. This is typically sold as wire fencing. The finished size depends on your needs. If the mat is for a sliding door or double French doors you may want to use a larger piece, but a 4' x 4" section works well for single doors or in front of most windows.
- Thick rubber mat. Stall mats, or 3/8th inch rubber on rolls are available at Farm and Ranch stores. The purpose of the mat is to provide electrical insulation between the wire mesh and the earth. Thin rubber or non-insulating materials such as tarp or fabrics will cause the mat to malfunction. While not dangerous, the mat won't work.
- Electric fence charger (one). A Gallager M80 or B75 is optimal, but any electric fence energizer will work. Chargers vary by energy output (the shock delivered) and the energy required to operate them. Options include battery, solar/battery, or plug-in styles. 110 volt plug-in styles are the lowest maintenance.
- Ground wire (6-feet). Typical ground wire is a bare (no insulation or covering), heavier 10-gauge copper wire.
- "Hot" wire (length determined by installation). This wire delivers electrical energy from the charger and the wire mesh panel. Typical hot (live) wire is 12 or 10 gauge, insulated, braided or solid strand copper wire.
- Copper ground rod (4-8 feet). This rod serves as the "earth ground" connection for the fence charger and is essential for proper charger operation.
- Ground rod clamp (one). This secures the ground wire coming from the fence charger to the ground rod.
- Alligator Clip. Clip will be used to secure "hot" wire to mesh wire panel.

Tools Required:


- Hacksaw or circular saw with carbide blade - to size mesh wire panel
- Saw - to cut rubber mat to size
- Hammer - to drive copper ground rod into the earth
- Wrench (or screw driver) - to fasten ground rod clamp and ground wire to ground rod

Assembly Steps:

1. Cut mesh wire panel to appropriate size.
2. Cut rubber mat 1" to 2" bigger on all sides than wire mesh panel so panel doesn't hang over mat edge.

3. Place rubber mat where it will be used. Center mesh wire panel on mat. It doesn't need to be formally attached to mat, but can just lie on top.
4. Install fence charger per manufacturer's directions. Consideration should be given to locating your power source.
5. Drive ground rod into the earth next to charger. Keep soil around ground rod moist to maximize charger effectiveness.
6. Run one wire from the Black charger terminal ground rod and attach with the ground rod clamp.
7. Run a second wire from the Red charger terminal to the wire panel and attach with the alligator clip.

Installed Components:

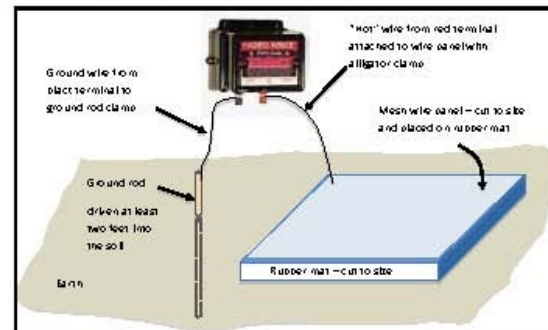

Warning signs are a good idea, particularly if children or the general public has access to the mat.

For the mat to deliver a shock, an animal has to have at least one point of contact with the earth or soil next to the mat. So if a cat or bird landed fully on the mat without simultaneous contact with the adjacent ground, no shock would be delivered.

Humans or pets coming into contact with the mat will experience the same brief shock as the bear might. While uncomfortable, it is not debilitating and certainly not lethal.

Plants or moisture that bridge between the mesh wire panel and the ground can cause an electrical "short", detectable by an audible "snapping" or "clicking" sound and a visible spark at the point of contact. If due to moisture, the condition will self-correct when the mat dries out. Make sure no branches or vegetation come in contact with the wire mesh panel.

Please Do Your Part to Keep Bears Wild

Visit www.wildlife.state.co.us/bears for more information or call your local Division of Wildlife Office.

Heavy-Duty Portable Fencing

The pictures below were provided by Margo Supplies to show examples of what they refer to as “heavy-duty portable” electric fencing. The difference between these designs and permanent fencing design is that the electric wire is attached to fiberglass posts that are fairly easy to move or remove. In other words, the posts used in these designs are meant to be easy to take down and are not buried, set in concrete or otherwise permanently installed.



Photos courtesy of Margo Supplies



The portable system pictured below is made with 52-inch welded-wire cattle panels. Offset brackets with Gallagher’s Turbowire are attached to use the hot/ground return system with three wire strands.



This design has been used effectively for compost piles and smaller fruit trees, and could also be used to exclude predators from hog or sheep pens. This design is inexpensive and easily moved for rotational grazing or 4H projects.

Photo courtesy of Patti Sowka

Electrifying Dumpsters and Garbage Containers

One solution to keep bears out of dumpsters is to electrify them or put some temporary electric fencing up around them. The following pictures show some ways of temporarily electrifying dumpsters or garbage cans to discourage bears. These designs can be especially helpful when a food-conditioned or young bear is just beginning to “visit” certain containers. These electrified containers can actually act as an aversive conditioning tool to “teach” the bears to avoid refuse containers.



This photo illustrates the cattle panel design for use around garbage dumpsters.

The upright panels are electrified by suspending them a few inches above the ground suspended on fiberglass poles. The panels on the ground are not electrified and act as the ground for this system.

Photo courtesy of Montana Fish, Wildlife & Parks

The two photos below show a temporary electric fence that was constructed in less than two hours at a restaurant in Montana. Bears were regularly accessing the dumpster and grease container that sit on a concrete pad. T-posts were driven at each corner and four hot strands were attached. Three electrified bungee cords manufactured by Gallagher Power Fence Systems made a convenient (but electrified!) gate for front dumpster access.

Photos courtesy of Patti Sowka





**Montana Fish,
Wildlife & Parks**

Living with Predators Project

The “Electric Fence Dumpster Kit” and “Hot Dumpster Kit”

Recognizing the value of being proactive in dealing with situations involving bears and mountain lions, Montana Fish, Wildlife & Parks (FWP) created the “Living with Black and Grizzly Bears, and Lions” (LBGL) project to help residents live with black and grizzly bears, as well as lions. LBGL is a program that aims at decreasing the number and severity of problems associated with humans coexisting with bears and lions.

As part of the project LBGL began researching different styles of electric fence in hopes of developing a method of bear-proofing garbage dumpsters. Electric fence has been a proven method of deterring bears from natural and unnatural food sources (Madel 1996.) This spring, in cooperation with Gallagher Fencing Systems and Cennex, FWP developed two methods of bear proofing garbage dumpsters with electric fence systems and developed a new style of electric fence for bee apiaries.

The first method of bear proofing garbage dumpsters consists of an electric fence design that is portable, user friendly and durable. The fence can be electrified with an energizer that has a 110-20 volt A.C. power cord or an energizer with a 12-volt battery and solar panel. The design consists of electrified cattle panels suspended above the ground on fiberglass posts that are grounded to a cattle panel pad and a ground rod (Photograph 1).

Photograph 1: “Electric Fence Dumpster Kit.”



The bear receives a direct shock when it stands on the ground pad and touches the electrified panels. The design has been tested on black bears and grizzly bears that were getting into garbage.



Photograph 2: Wild grizzly approaching.

In early August 2000 a grizzly bear was photographed, with a remote camera, while attempting to reach a fenced deer carcass (Photograph 2.)

In May 2001 the fence was taken to the Grizzly Bear Discovery Center in West Yellowstone, Montana and tested on eight captive grizzly bears (Photograph 3). In all cases this style of electric fence deterred the bears.

Photograph 3: Captive grizzly approaching electric fence.

This style of electric fence kit can be erected around garbage cans, metal garbage dumpsters, 300 gallon round plastic dumpsters, cooking grease containers, pet or livestock food, small buildings, compost piles, fruit trees, game pole and meat caches, tents and small vehicles or campers.



Three sizes of this style of electric fence design have been erected and by FWP. The 8' x 8' "electric fence dumpster kit" is appropriate for one dumpster; the 16' x 16' "electric fence dumpster kit" and the hexagon "electric fence dumpster kit" with 8' sides will enclose three to four 3 square yard garbage dumpsters. The most positive aspect of this fence style is that the electric fence is free-standing on fiberglass posts, thus allowing the entire fence to be picked up and moved to adjacent sites.

A similar style of fence, using insulated steel T-posts can be erected around bee yards. This electric fence design is expensive to erect, but it ensures that bears receive a direct shock when they stand on the ground pad and touch the electrified panels. This more permanent form of the cattle panel fence style can be erected around larger buildings, chicken coops, horse trailers, calving sheds, sheep bedding grounds, gardens and orchards.

The second method consists of an electrified dumpster on an insulated pad that is grounded to a cattle panel pad and ground rod. The dumpster can be electrified with an energizer that has a 110-20 volt A.C. power cord or 12 volt battery with a solar panel. The bear receives a direct shock when it stands on the ground pad and touches the electrified dumpster.

The design has been tested for several years in the town of Seeley Lake, MT and appears to be an effective means of deterring bears. The same technique can be used on horse trailers, and small metal storage sheds.

There are a variety of energizers available on the market. Based on testing and observations, fence energizer voltage output should be a minimum of 6000 volts with a stored energy rating of 0.7 Joules or greater (Madel 1991.) The LBGL project found that the Gallagher 110 volt Fence Master Energizer worked well with the "hot dumpster kit" and 8' x 8' "electric fence dumpster kit" when a power source was available.

The solar powered Gallagher SuperCharger S17 worked well with the "hot dumpster kit" and the 8' x 8' and 16' x 16' "electric fence dumpster kits. The solar powered Gallagher B200 and the Parmak Mag. 12 Solar worked well with the 32' x 32' bee yards. For information on what energizers are appropriate for larger fence structures contact your local Gallagher and Parmak fencing system dealers.

The "Electric Fence Dumpster Kit":

The following directions are for the **8' x 8' and 16' x 16'** fence kits.

Materials:

Eight 8' or 16' cattle panels (two 8' cattle panels instead of one 16' cattle panel make a more effective gate); one bag of Gallagher Insultimber Dropper Clips (G702); five 5' 1 1/4" diameter fiberglass posts (the 16' x 16' fence may require two to three additional posts for the 8' panel gate); one 3' ground rod with a clip; one piece of 10' to 20' of insulated cable; 3 line clamps; 2 electric fence spring loaded gate handles, two electric fence signs; one 6' T post to mount energizer (optional) and the energizer of your choice.

Directions:

- Find an appropriate location for your electric fence. If the fence energizer requires a direct power source make sure the distance corresponds to the length of the power cord. The site should be flat and cleared of vegetation.

- Lay four cattle panels down on the ground and form a perfectly square 12.5' x 12.5' or 20.5' x 20.5' pad. Wire the ends and sides of the four cattle panels where they connect. Use Gallagher Insultimber Dropper Clips (G702) to wire the panels together (Diagram 1).

Diagram 1: ground pad





Diagram 2: fence post placement



- Attach the four remaining cattle panels end to end in three places with insultimber clips and stand the fence up in the form of a perfect 8' x 8' or 16' x 16' square in the center of the cattle panel pad. Using the insultimber clips wire the fiberglass posts (slightly offset) to the inside corners of the fence (Diagram 2).
- The corner with two posts next to each other will be your gate. (If you are using the 8' gates on the 16' x 16' fence you will need to wire two additional posts onto the fence where the two 8' panels come together.) Wire the two gate handles on the bottom and the top of the left cattle panel. Using the insultimber wire clips make two catch loops for the gate handles on the right cattle panel. Open up the gate by picking up the right cattle panel and walking back. The opening of the gate can be larger by picking up the left cattle panel and walking back. The gate opening should be large enough to allow a dumpster to be pulled in and out of the fenced area. Close and latch the gate.
- Choose the location of your energizer and determine how you will turn it on and off. The energizer can be mounted on a wall, tree or metal T-post inside the fenced area. After mounting the energizer cut two pieces of insulated cable for the hot wire (+) connection and ground wire (-) connection. The (+) wire will need to go from the (+) connection on the energizer to the back of the fenced area opposite the gate. The insulated cable needs to be attached with a line clamp and strung or woven in such away that the connections will not be pulled loose by a bear walking around the fence.
- Pick a spot on the cattle panel pad that is closest to the energizer and pound in the ground rod. The (-) insulated cable will need to go from the (-) connection on the energizer to the spot where the ground rod and the cattle panel pad come together. The insulated cable needs to be attached to the cattle panel and the ground rod with line clip and then strung or woven in such away that the connections will not be pulled loose by a bear walking around the fence. Place two electric fence signs at the site.

The "Hot Dumpster Kit"

The following directions are for electrifying a 2 to 4 square yard metal garbage dumpster.

Materials:

Two 8' cattle panels; one bag of Gallagher Insultimber Dropper Clips (G702); one 3' ground rod with a clip; one piece of 10' to 20' of insulated cable; 3 line clamps; one 4' x 6' rubber horse trailer pad; two electric fence signs; one 6' T-post to mount energizer (optional) and the energizer of your choice.

Directions:

- Find an appropriate location for your electrified dumpster. If the fence energizer requires a direct power source make sure the distance corresponds to the length of the power cord. The site should be flat and cleared of vegetation. In some areas dumpsters are required to be placed on concrete pads.
- Lay two 8' cattle panels side by side on the ground or concrete pad and form a perfectly square 8' x 8.5' pad. Wire the sides of the cattle panels where they connect. Use Gallagher Insultimber Dropper Clips (G702) to wire the panels together.
- Place the rubber horse trailer pad in the middle of the cattle panel pad and roll the dumpster onto the horse trailer pad.
- Choose the location of your energizer and determine how you will turn it on and off. The energizer can be mounted on a wall, tree or metal T-post. After mounting the energizer cut two pieces of insulated cable for the hot wire (+) connection and ground wire (-) connection.
- The (+) wire will need to go from the (+) connection on the energizer to the alligator clamp that attaches to the dumpster. It is important that the paint be removed where the (+) end attaches to the dumpster. The insulated cable needs to be strung or woven in such away that the connections will not be pulled loose by a bear walking around the fence.
- Pick a spot on the cattle panel pad that is closest to the energizer and pound in the ground rod. The (-) insulated cable will need to go from the (-) connection on the energizer to the spot where the ground rod and the cattle panel pad come together.
- The insulated cable needs to be attached to the cattle panel and the ground rod with line clip and then strung or woven in such away that the connections will not be pulled loose by a bear walking around the fence. Post two electric fence signs at the site.

These two dumpsters were enclosed using a temporary electric fence that was also constructed in about two hours.

Metal t-posts supported welded wire cattle panels that acted as the ground for the fence. Plastic off-set insulators held the four hot (+) strands on the outside of the cattle panels.

Three electrified bungee cords manufactured by Gallagher Power Fence Systems stretched across the front of the enclosure acted as the gate and provided easy access for the hauler when emptying the dumpsters.



The garbage can in the photo on the left is enclosed by electrified welded wire cattle panels.

This is a quick and fairly inexpensive way to keep bears out of garbage cans. Note that multiple garbage cans can be protected using this enclosure.



The garbage can in these two photos is electrified using a battery-operated B60 energizer connected directly to the cattle panel. The rubber stall mat prevents the wire panel from grounding out (see photo at right).

The design could be altered to use rubber tires instead of cinderblocks to set the cattle panel platform.

The panels on the ground act as the ground mat. By suspending the can on the wire panel, the can itself can be made "hot" (see photo at right).



Permanent Fencing

Permanent electric fencing differs from portable electric fencing in how long the fencing will be in place and therefore in some of the materials used to construct the fence. The same general components are found in both permanent and portable fencing: posts, wire, energizer, grounding system and insulators. Permanent or semi-permanent heavy duty portable fencing is often constructed with large-diameter wooden posts which are treated to prevent them from rotting too quickly. Permanent fencing is usually constructed using wire strands instead of welded-wire cattle panels.

One last major difference is that permanent fencing often involves securing a large area and therefore requires the use of a stronger energizer to ensure that a sufficient flow of electricity is present along the entire length of the fence.

The photos in this section of the guide show examples of permanent electric fences that have been constructed to exclude bears and wolves.



This permanent bear exclusion fence is located near Choteau, Montana. This fence was constructed using treated wood posts for added strength and stability.

Photos courtesy of Larry Feight

The fence to the right was built in 1987 for bear, wolf, and coyote exclusion. Located near Meteetsie, Wyoming, this nine-wire alternating hot/ground fence was one of the first of its kind built in the area in 1987. A hot/ground system was important in this area due to the dry soil conditions.



The photo to the left shows another example of a permanent electric fence.

Permanent electric fencing often utilizes wooden posts for structure as shown in these photographs.




Note in the photo at the left that insulators must be used to secure the hot strands to the posts.

The other wire strands are attached directly to the wooden posts (as seen in the same photo) and act as ground wires. This is referred to as an alternating hot/ground fence design.



HINT:

It's best to use treated posts since they tend to last longer when subjected to harsh weather conditions.

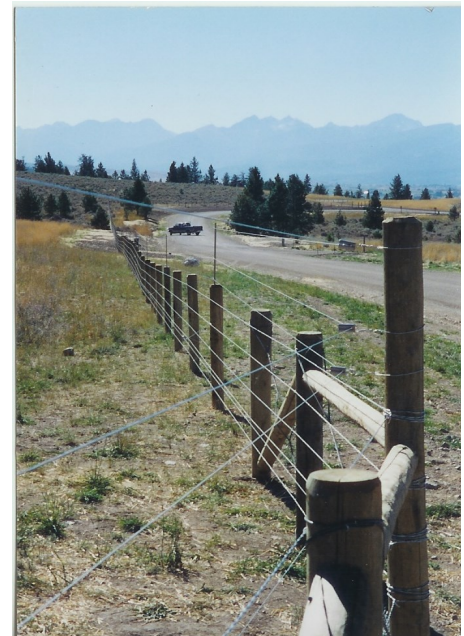



This photo shows a ranch gate that has been modified with electric fencing. The hot strands above the gate discourage predators from trying to go over the top of the gate.

Photo courtesy of Larry Feight.

Contract Fencing by Margo Supplies

Margo Supplies, located in Canada, specializes in the design and installation of electric fencing to deter wildlife, especially bears, from landfills, outfitter camps and other areas. The following group of pictures was provided by Margo Supplies to illustrate some of the fencing applications that Margo has addressed. Most of the enclosures pictured were built for bear exclusion but could work for wolf exclusion as well.

Please contact Jeff Marley at Margo Supplies for information about the electric fencing products they carry or for information about the contract electric fencing services Margo Supplies offers. Visit them at www.margosupplies.com or phone them at (403) 652-1932.



This picture shows an eight-strand alternating hot/ground fence. Note how close the first hot wire is to the ground—this is to prevent predators from going under the fence. (The wire closest to the ground is a ground wire).



This installation involved blasting holes into the rock to insert the fence posts.



This set-up utilizes an energizer with a solar panel to provide a power source where electricity is not available.



Permanent fencing utilizing two different types of posts...



Photos courtesy of Margo Supplies

Margo Supplies Contract Electric Fencing (cont.)

The following sequence of photos shows electric fencing in combination with cattle guards, otherwise known as "Texas Gates." Electrified cattle guards are another way to deter predators and livestock from livestock pastures, landfills or other areas.



The photo above shows a "Texas Gate" with a walk-through gate for convenient access for people.

The cattle guards are constructed of 5.5" O.D. (.304 wall thickness) cross members, 8.5" x 2" rectangular tubing mud sills and 10.75" O.D.(3/16" wall thickness) main support pipes. The runners (pipe bed) are 3.5" with .156 wall thickness. These guards can withstand the heaviest of trucks and are designed to require little maintenance.



The photo on the right shows other electric fence configurations.

Photos courtesy of Margo supplies.



Deterring Grizzly Bears with Electric Fencing

Electric fencing has become an integral part of non-lethal management of grizzly bears. Montana Fish, Wildlife & Parks Bear Management Specialist Mike Madel was instrumental in testing and promoting the use of electric fencing for reducing livestock depredations and other grizzly-related conflicts along the Rocky Mountain Front in Montana. He also conducted research to establish specifications for effective grizzly bear exclusion fences.



The specs presented here were derived as a result of that research. These specs are now considered to be minimum requirements for building electric fencing for grizzly exclusion and are now the standard used by the U.S. Forest Service and state grizzly bear management specialists.

Photo courtesy of Montana Fish, Wildlife & Parks.

Electric Fencing Specifications — Grizzly Bear Exclusion

Minimum joule requirement :	.7 or more
Minimum voltage requirement :	6,000 or more
Recommended fence polarity :	hot/ground
Minimum # of wires :	6 or more
Wire spacing :	6"
Height of fence :	4'
Gauge of wire :	14, or 12

Applications for electric fencing for grizzly exclusion include:

- Apiaries
- Night sheep holding pens
- Calving pens
- Smaller goat, sheep, and llama pens
- Poultry operations
- Sheds and greenhouses
- Backcountry camps
- Orchards
- Gardens
- Compost piles
- Dumpsters/garbage containers

Deterring Grizzly Bears from Livestock Areas and Barns



*Photos courtesy of Brian DeBolt,
Wyoming Game & Fish Dept.*

Sheep fence in Wyoming.



Electric fence around a barn in
Wyoming.

Deterring Bears from Crops, Livestock Areas and Barns

The photos below show examples of how electric fencing can be placed around crops, yards, fruit trees, gardens, or livestock pens to deter bears. All of the fences are in use in places where grizzly bears live but the same designs work equally well to deter black bears.



Photo above courtesy of Jamie Jonkel, Montana Fish, Wildlife & Parks, and Patti Sowka.



Electric fence around a plot of corn. Photo by Stacy Courville, CSKT Bear Management Office.



Electric fence around compound of potential bear attractants. Photo courtesy of Jamie Jonkel, Montana Fish, Wildlife & Parks.



Photo by Bobbe Almer provided courtesy of Jamie Jonkel, Montana Fish, Wildlife & Parks.



Electric fence around yard to deter bears from plants and bird feeders. Note that at least five strands of electric fence wire are recommended to deter bears. Photo by Patti Sowka.



Well constructed electric fence around chicken coop. Photo provided courtesy of Jamie Jonkel, Montana Fish, Wildlife & Parks.

Electric Fencing for Deterring Polar Bears

The following module is reproduced from the Nunavut Field Unit - Polar Guard Training Manual. This manual was created as part of a collaborative project between the Nunavut Field Unit of the Parks Canada Agency and Bearwise with funding from the International Polar Year.

**Electric Fencing for Deterring Polar Bears
Churchill, Manitoba
1999**

**Andy McMullen
Department of Sustainable Development
Government of Nunavut
Kugluktuk, NT
2000**

LIST OF FIGURES

Figure 1.	Test Fence #1 -Layout.	5
Figure 2.	Photo. View of Test Fence #1 looking south.....	6
Figure 3.	Photo. Surveillance Camera System mounted approximately 7'-6" above ground level.	6
Figure 4.	Dog Mushers' Lot - Fence Layout.	8
Figure 5.	Photo. Test Fence #2 - Dog Mushers' Lot looking south.	9
Figure 6.	Photo. Test Fence #2 - Dog Mushers' Lot looking north-east.	9
Figure 7.	Comparison of Wire Spacing.	16

LIST OF TABLES

Table 1(a). Summary of Test Fence #1 Results.....	13
Table 1(b). Summary of Test Fence #2 Results.....	14

TABLE OF CONTENTS

LIST OF FIGURES	ii
LIST OF TABLES	iii
INTRODUCTION	1
METHODS	3
RESULTS	11
DISCUSSION	15
LITERATURE CITED	18
ACKNOWLEDGEMENTS	19
APPENDIX A - 1. Fence Specifications.....	20
APPENDIX A - 2. Fence Construction Details.....	21
APPENDIX B. Specifications - Surveillance Camera System.....	22
APPENDIX C - 1. Observers Report - Dog Mushers' Lot.....	23
APPENDIX C - 2. Observers Report - Dog Mushers' Lot Continued.....	24
APPENDIX D. Video Tape - Fence Test Sequences.....	24
APPENDIX E. Hi-Tensile Fence - Installers Manual.....	24

INTRODUCTION

Problem polar bear kills have a detrimental impact on community quotas resulting in lost hunting opportunities and loss of possible revenue, not to mention the possible damage to the bear populations. Although problem bears are killed throughout the year the majority of kills occur during the ice-free period between August and November (Stenhouse, Lee and Poole 1988). These researchers found that between late August and early September the period of maximum open water begins and is followed by an abrupt rise in problem kills.

The largest percentage of problem polar bear kills in Nunavut has been in "outpost camps" (Stenhouse, Lee and Poole 1988). Outpost camps are permanent hunting camps that are occupied for a minimum of three months a year by one or more families of Inuit. These camps are normally in prime bear habitat and are long distances from the communities. By the time a wildlife officer can respond to a problem bear complaint it is too late and the bear has been shot. Things have not changed much since Stenhouse's study in 1988.

To be effective in reducing problem polar bear kills in "outpost camps" we are going to have to find a way to provide the occupants of these camps with the proper deterrent tools so that they can successfully deter polar bears on their own. In 1998 / 99 the Kitikmeot and Keewatin Regions began distributing deterrent kits, consisting of 12 gauge scare cartridges and rubber bullets, to outpost owners and other land users. Although these deterrent kits helped they still depended on the camp occupants detecting the bear early enough to be able to use the deterrents effectively. What is needed is a deterrent that does not depend on the occupants of the camp to be effective i.e. so people don't have to stay up all night watching for bears.

Based on our successes of using electric fencing to deter grizzly and black bears from landfills, outpost camps, industrial camps and sport hunting camps we proposed the installation of high-tensile electric bear fencing at the more problematic outpost camps. But prior to installing a fence that would enclose people and their property, we needed to test the effectiveness of different fencing options in deterring polar bears in a controlled environment.

I approached the Manitoba Department of Natural Resources (DNR) office in Churchill about the possibility of conducting a test in the Churchill area. Past studies on the effectiveness of electric fences had been conducted there and I had been assured that we would get a large number of bears during a predictable time period. In consultation with the DNR's officer in charge, the area biologist and the Superintendent of Parks Canada in Churchill a site was selected and the timing of the study was determined.

In addition to testing of the effectiveness of electric fencing I also wanted to use the study as a learning opportunity for other Wildlife Officers in Nunavut. For

2

this reason Joe Savikataaq from Arviat and Shane Sather from Clyde River were recruited to help with the study. We also brought in Jeff Marley, a leading expert in electric bear fencing, to ensure that the fence was installed exactly as designed. Additionally if we did have bears penetrating the fence we could call on Jeff's expertise to try and determine why the bears were getting through and how we might change the fence to prevent any further penetrations.

Initially we planned to test both the 8 wire hi-tensile fence and the 6 wire light gauge or portable fence designed and sold by Margo Supplies of High River, Alberta. Due to time constraints resulting from having to build two 8-wire fences we were unable to test the 6-wire portable fence.

METHODS

SITE SELECTION:

Test fence #1:

For the selection of this site we drew upon the experience and recommendations of Wade Roberts of Manitoba Department of Natural Resources, Churchill and Doug Clark of Canadian Heritage Parks Canada, Wapusk National Park.

The selected site was located on Ministry of Transportation - Churchill Airport property approximately 2 kilometers southwest of the Churchill dump. This was considered the best site for testing the electric bear fencing because:

1. Being on airport property ensured the security of the test site as access was controlled through the use of locked gate and MOT staff monitored the area.
2. Road access to the site lowered construction and monitoring costs.
3. The dump draws polar bears to the area.
4. Large number of polar bears are captured in the area each fall.
5. The soil conditions (dry sand and gravel) provided us with the worse possible grounding conditions.
6. There were no structures of any kind in the area of the fence and activity was restricted to MOT and Manitoba DNR.

A draw back of this site was the possibility that the dump would be a more attractive bait than the seal carcass we planned to use within our test fence. To increase the attractant of our fence site we planned to burn seal fat in addition to the use of whole carcasses.

We later discovered that the test site was very near or within a "Polar Bear free zone". During the three days that it took to finish the installation of the high tensile test fence 5 bears were captured and removed from the area of the test site. It was apparent that this area was being trapped intensively by DNR officers and that we were going to receive few visits to our test fence at this site. In an effort to try salvage this test we needed to find a better site.

In consultation with Wade Roberts of DNR and Harvey Lemelin the Director of the Northern Studies Center, a dog lot located just west of the Northern Studies Center was chosen. In choosing the second site we applied the same basic criteria used in determining the first.

Test fence #2 - Dog Mushers' Lot:

Being located on the Northern Studies Center property provided the same level of security as test site #1. Study Center staff and the dog musher's who were living at the dog compound monitored the area. Other than being more compacted, the soil conditions were identical to test site #1, dry sand and gravel, providing us with the worse possible grounding conditions. If the fence worked here we were confident that it would work even better at sites with better grounding soils.

A large number of Polar Bears frequented the area and approximately 50 bears had to be deterred from this site the previous fall. The dogs and dog food provided us with an additional and proven attractant.

The mushers lived in a house in the middle of the dog compound and there were other structures close by. This setup provided us with the opportunity to test the fence in an actual field application that closely replicated the situations at outpost camps in Nunavut. The mushers remained on site until after the Polar Bear viewing season ensuring that monitoring of the site would continue after we left.

Also we felt good about the choice of this site because the installation of a electric bear fence, if it worked, would address a major human safety concern of the Northern Studies Center.

INSTALLATION:

Following the directions in the "Permanent Hi-Tensile Heavy Duty Fiberglass Electric Fence System - Installer's Manual" provided by Margo Supplies Ltd. we installed the hi-tensile type fence at both test sites. This system consisted of eight strands of 12.5 gauge smooth galvanized wire supported on fiberglass posts. The wires were tightened to approximately 250 lbs. tension and wired alternating positive and negative. A Parmak Solar Magnum 12 electric fence charger was used to energize the fence wires. See appendix A1 -A2 for detailed specifications and construction details.

Test fence #1 was constructed in the shape of a triangle of equal sides of approximately 40' per side complete with on 3' man gate. (Figs. 1 & 2) The inside of the enclosure was baited with a seal carcass and by burning seal fat in a shallow metal pan. In order to record and interpret the polar bears interaction with the fence we used a Model RM-680-96 Video a surveillance camera system purchased from Compu-tech Systems of Bend, Oregon. The camera was activated by passive infrared sensors. (Appendix B)

5

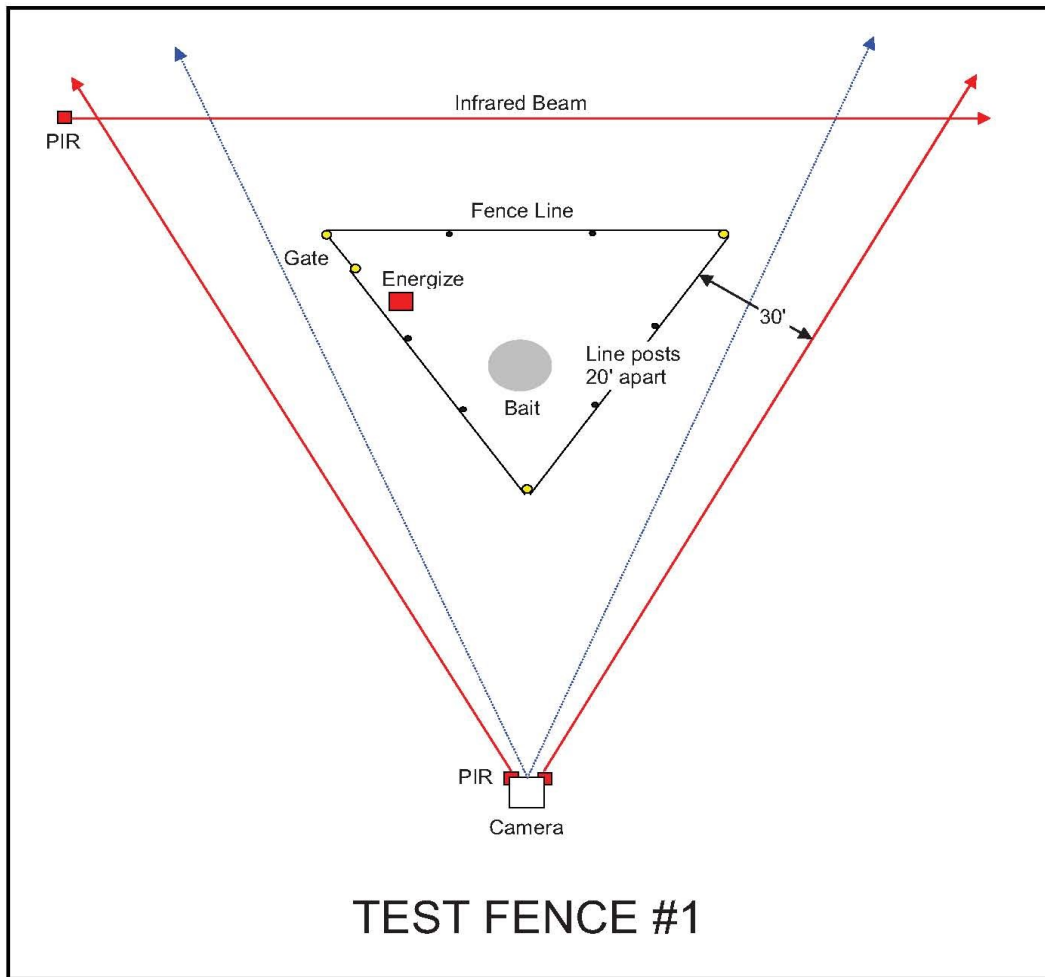


Figure 1. Test Fence #1 - Layout

Using our homemade mounting bracket the video surveillance camera system was mounted on top of an 8' section of 3" plastic pipe dug into the soil to a depth of 2'. This put the camera height at approximately 7' - 6" above ground level. We set the camera back from the fence a distance of approximately 40' - south of the southern corner of the fence. This was to ensure that we had a great enough depth of field to be able to capture "in focus" video footage of bears, regardless of their location along the fence line. To further ensure "in focus" footage the mounting bracket was guy-wired in three directions (Fig.3).

6



Figure 2. View of test fence #1 looking north.



Figure 3. Surveillance camera system mounted approximately 7'-6" above ground level.

Two of the passive infrared sensor/transmitters were mounted directly on the plastic pipe listed above, sighting along the east and west sides of the fence. The third unit was mounted on a wooden stake on the north side of the fence sighting from west to east. The infrared sensor sight lines were set at a distance of approximately 30' from the fence line to allow the video camera to spool up before the bears entered the camera view. In order to receive the radio signals from the transmitters we installed the 12' wire antenna on the receiver at the camera. The camera "on time" for each triggering was initially set at 15 minutes but was reduced to 5 minutes in order to save film. The battery from the surveillance camera system was removed and replaced with a fully charged one on a regular basis, usually every two days.

Our Nunavut crew checked the fence and camera at least two times a day, mid-morning and early evening, from October 17th to the 24th. Only actual bear visits were recorded on the observation sheets. From October 26th to November 12th staff from Parks Canada checked the fence and camera. They completed an observation sheet each time they checked the camera and fence weather there had been a visit by a bear or not.

Test fence #2 - Dog Musers' Lot:

At the dog musers' lot the layout was a rectangular fence measuring 60' x 80' (Figure 4,5,6). This fence was constructed according to the "Permanent Hi-Tensile Heavy Duty Fiberglass Electric Fence System - Installer's Manual" provided by Margo Supplies Ltd. This fence included one 3' man gate and the fence was constructed to allow for the installation of a 16' swing gate in the fall of 2000.

At this site a 120 - volt electrical supply was available so we used a Parmak Super Energizer SE3 to charge the fence. The duty cycle (on / off times) of this energizer is the same as the Parmak Solar Magnum 12 used on test fence #1. This was the only design detail that was different from test fence #1. The fence at the dog musers' lot was constructed to the same construction details shown in appendix A.

At this location we did not need to use any seal bait or a smudge as the site had its own set of proven attractants, i.e., the dogs and their food (raw chickens).

We did not install a surveillance camera system at this site because the site was occupied 24 hours a day by the members of the dog mushing crew. With all the activity in and around the fence perimeter the use of infrared sensor / transmitters would have been problematic. The mushers completed an observation sheet for each bear that visited the site.

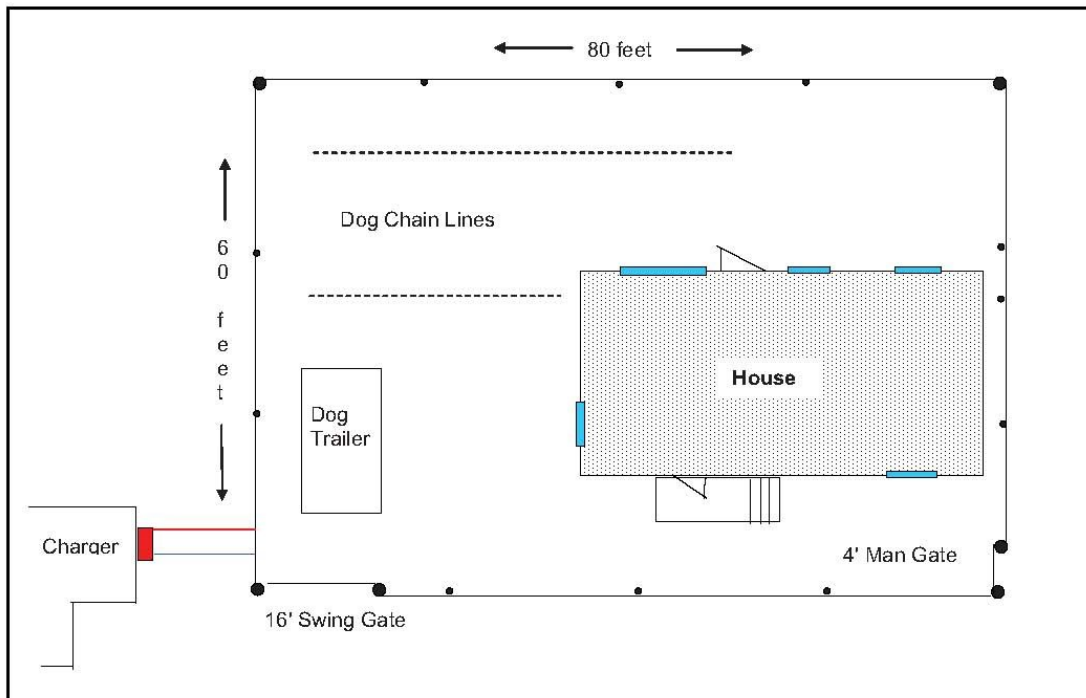


Figure 4. Dog Musher Lot - Fence



Figure 5. Test Fence#2 Dog Musher's Lot looking south.



Figure 6. Test Fence #2 Dog Musher's Lot looking North East

10

Metering of Fence: Using the hand held digital meter to test the fence we were able to confirm that the wires were actually charged. Just because the meter on the fence charger says that it is putting out 10,000 volts does not guarantee that all parts of the fence are charged to the same level.

On October 18th test fence #1 was energized and the voltage was checked using a hand held digital meter. Each positive wire was tested and the meter gave a reading of 9,000 volts along the total length of the fence. While on site DSD staff tested all three sides of the fence every day using the hand held tester. On October 25th the last day that DSD checked the voltage we were still getting a reading of 8,000 volts on all three sides of the fence. Once Parks staff took over monitoring the fence was tested only periodically and the voltages were not recorded. As a result of lack of direct sunlight and possible drifting snow grounding the lower positive wire it is likely that the voltage was at a reduced level towards the end of the study.

Test fence #2 - dog mushers lot was energized on October 19th. Each positive wire was tested and the meter gave a reading of 10,000 volts along the total length of the fence. The higher voltage readings on this fence, as compared to the 8,000 volts on test fence #1, was the result of the higher output of the 110 volt low impedance fence charger, Parmak Super Energizer SE3. This units power supply was from a 110-volt source so the lack of sunlight would not have had any effect on the voltage output. Any drifting snow that would cover the lower positive wires was cleaned away on a daily basis by the mushers. Therefore the voltage on the fence would have remained at 10,000 volts for the entire test.

RESULTS

Test Fence #1:

Fewer bears visited this site than we had hoped. Unseasonably warm weather had prevented ice from forming along the coast; consequently the polar bears were not as active as in normal years. Additionally the area of the test fence was within the polar bear free zone maintained by DNR. This substantially reduced the potential number of bear visitations.

In spite of these factors, at least nine different polar bears approached the fence. Two adult bears approached the fence but did not attempt to penetrate it. The remaining seven polar bears tested the fence at least 26 times and failed to penetrate the fence (Table 1a). Fourteen of these attempts were recorded on video (Appendix D).

These bear deterrings took place even though we suspect the fence was operating at reduced voltage towards the end of the monitoring period. For the test period of October 18 to November 17, 1999 there were only three days out of thirty-one that had less than 85% cloud cover. For twenty-six of the remaining twenty-eight days the area experienced 100% cloud cover. Likely the combination of lack of sunlight and drifting snow depth, causing grounding of the lowest positive wire, acted to reduce the voltage on the fence.

On November 11, 1999 a sow and cub visited the site and tried to penetrate the fence. From the tracks on the ground it appeared that the cub was small enough to be able to get part way through the fence before it received a shock. Once inside the fence the tracks indicated that the cub tried getting out immediately as it did not approach the bait. Rather it stayed near the west side of the fence until it was able to get back out near the gate. It appeared that the sow, probably to rescue her cub, persisted in trying to penetrate the fence approximately eight times but was unsuccessful. Once outside the fence the sow and cub immediately left the area. This visit was not captured on film because the camera lens and the three sensor / transmitters were iced over.

Other incidents included three night triggerings of the surveillance camera; however it was not set up for night vision. On the first occasion we were able to determine from the tracks that a bear had tested the fence and was deterred. On the second occasion tracks were not found due to the frozen and relatively snow free ground. In the third case fresh snow cover would have concealed any tracks that there might have been. In all three cases the bait was not touched; nor was there any indication that bears or any other animals had penetrated the fence. On a number of occasions fox tracks were recorded outside and inside the fence but the camera had not been triggered. Probably because the passive Infrared sensors were set at a height that allowed foxes to come and go without triggering the camera. Although I am confident that the second and third night visits were

12

bears, given the uncertainties regarding these visits they are included in Table 1a as question marks and we have not included these events as confirmed bear visits or deterrents.

Test Fence #2 - Dog Mushers' Lot:

Fewer bears visited this site than we had hoped for. Again weather was a major factor resulting in the bears being less active than normal. However, we were able to obtain eyewitness observations of six different polar bears interacting with this fence.

Four of the six bears tried to penetrate the fence and were deterred. Two 2-year olds with a sow did not test the fence (Table 1b). One sub-adult bear charged at the dogs from a distance of 10' from the fence, hit the fence and was deterred.

TABLE 1 (a). SUMMARY OF TEST FENCE #1 RESULTS.

DATE	Interpretation	Recorder	Bear	Age	Attempt	Result	Comments
22/10/99	Tracks	DSD	B-1	Adult	01	Deterred	
24/10/99	Tracks	DSD	B-2	Adult	02	Deterred	Night visit – Note 1
25/10/99	Camera	DSD	?-?	?	?	?	Night visit – frozen ground, ice crusted snow - no tracks seen
27/10/99	Camera	DSD	?-?	?	?	?	Night visit – fresh snow cover when checked by Parks – no tracks seen
02/11/99	Camera	DSD	B-3,4,5	Sow + 2 3 yr. Olds	04 – 13	Deterred	Caught on camera but Parks saw no tracks at fence
02/11/99	Camera Witnessed	Parks DSD	B-3,4,5	Sow + 2 3 yr. Olds	No attempt		Parks watched bears approach no closer than 4 meters – Note 2
02/11/99	Camera	DSD	B-3,4,5	Sow + 2 3 yr. Olds	14 - 16	Deterred	Fresh snow cover when checked by Parks – no tracks seen
02/11/99	Camera	DSD	B-3,4,5	Sow + 2 3 yr. Olds	17	Deterred	Fresh snow cover when checked by Parks – no tracks seen
02/11/99	Camera	DSD	B-3,4,5	Sow + 2 # yr. Olds	18	Deterred	Fresh snow cover when checked by Parks – no tracks seen
04/11/99	Tracks	Parks	1	Adult	No attempt		Bear approached from SW coming to approx. 10 M. from fence, departed to the north.
04/11/99	Tracks	Parks	1	Adult	No Attempt		Bear approached from NE coming to approx. 10 M. from fence, departed to the west.
04/11/99	Camera	DSD	?-?	?	?	?	Night visit – camera totally iced over
09/11/11	Tracks	Parks	B-6, 7	Sow & cub	19 – 26 27	Deterred Got in	Cub managed to get inside fence, did not approach bait – see Note 3 Camera and sensors iced over.

Table 1 (b). SUMMARY OF TEST FENCE #2 – Dog Musher's Lot RESULTS.

DATE	Interpretation	Recorder	Bear	Age	Attempt	Result	Comments
26/10/99	Witnessed	Musher	BM-1	Adult	M-1	Deterred	Followed up with scare cartridge.
30/10/99	Witnessed	Musher	BM-2,3,4	Sow +2 2yr olds	M-2	Deterred	"Perfect" – see Note 4
08/11/99	Witnessed	Musher	BM-5	Sub- adult	M-3	Deterred	Followed up with scare cartridge.
11/11/99	Witnessed	Musher	BM-6	Sub- adult	M-4	Deterred	Followed up with scare cartridge.

NOTE 1: Sensor triggered camera but video - tape was full so this interaction was not recorded on film. We had captured on film 4 brief glimpses of the DNR truck and 3 brief glimpses of the Airports van. The rest of the tape was filled with footage of the fence just sitting there. We reminded DNR and Airports of the infrared sensor locations and reset the camera so that the run time was only 5 minutes.

NOTE 2: The bears approached close enough to set off the video camera but did not come into the cameras field of view. However the camera did record the sound of the bears vocalizing very near the camera. After approximately 2 minutes the sow walked just into the cameras view from the east directing her vocalizations towards the fence.

NOTE 3: From track interpretations and through discussions with Parks's staff, it appears that the sow tested the fence in eight different places but was unable to penetrate the fence. 3 times on the north side before the cub went through and 5 on the west side after the cub was inside. It appears that the cub was part way through the fence when it received a shock, its forward moment and response to the shock probably propelled it through the fence. Once inside the cub never approached the bait, its tracks where confined to the west side of the fence where it eventually was able to get out.

NOTE 4: A copy of this report is included in Appendix C1-2 to illustrate the effective use of a combination of deterrent tools. This demonstrates potential expectations for an outpost camp owner to deal with a bear visit.

DISCUSSION

Although we did not observe as many bear visits as we had hoped and we were unable to test the six-wire portable fence, the results of the study were encouraging. Polar bears attempted to penetrate the fence at least 31 times and, with the exception of the small cub, all bears were deterred. Unfortunately the camera and sensors were iced over when the one cub did penetrate the fence. At this stage in the development of electric bear fencing it is the failures, not the successes, that are of the most interest and provide valuable feedback.

The two test fences achieved a combined success rate of 97% (30 out of 31 attempts). Test fence #1 had a success rate of 96% (26 of 27) and test fence #2 – dog mushers' lot had a 100% success rate (4 of 4). These results do not support the conclusions of previous studies conducted by Wooldridge and Gilbert (1979), Stenhouse (1981), Clarkson (1987) in which rates of success were 18% (5 of 27), 7% (3 of 42) and 28% (2 of 7) respectively.

The design and construction of the eight-wire high-tensile electric bear fences that we tested were markedly different than the fences tested previously. Although the methods sections of the previous studies do not contain enough information to say exactly why the four-strand fence did not do as well as the eight-strand fence, there are several technical differences:

Fence Barrier: The eight-wire hi-tensile fence and the 4-strand fences used in previous studies differ in the number of wires and wire spacing. Previous studies used a uniform wire spacing of approximately 12" where in this study the fence had the wires spaced closer together where the bears would likely try to push through the fence i.e. ground level and shoulder height. The first positive wire was 8" above ground level (agl). The height of the first positive wire on Stenhouse's fence was 24" above ground level (Figure 7).

With earlier fence designs a bear crawling under the first negative wire would not get a shock until it came in contact with the first positive wire 24" agl. It is also possible that once the negative wire on the bears back got close to the positive wire above, the path of least resistance for the electrons would be from the positive to the negative wire rather than through the bear to earth. This would ground out the fence resulting in the bear feeling nothing. The fence in this study created a more effective barrier making it difficult for a bear to push through the fence without coming into direct contact with a positive and negative wire.

Wire Tension: Although it is hard to determine exactly how tight the fence wires were from reviewing previous studies, it appears that they were only pulled hand tight. The eight-wire hi-tensile fence in our study used wire strainers to tighten the wires to approximately 250 lbs. of tension. This ensured that the wire would part the hair of the bear making contact with the hide to deliver the shock. This tension also makes it difficult for a bear to push the wires together and short out the current.

16

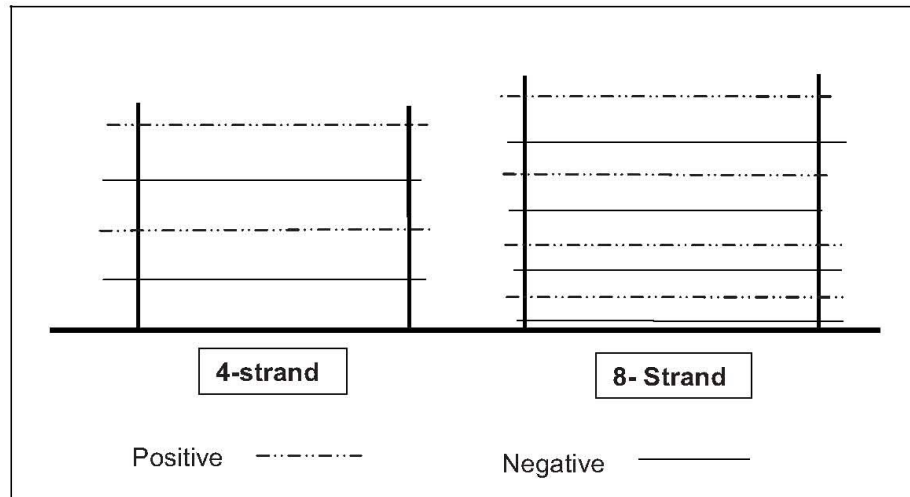


Figure 7: Comparison of wire spacing.

Grounding: Proper grounding is key to an effective electric fence. Both our test fences had 3 - 5/8" x 10' ground rods with electrical ground clamps between the charger and the fence. Additionally every upright post at a corner or end had a ground plate attached. Test fence #1 had a total of 7 grounds and test fence #2 had nine grounds. Stenhouse's fence had a total of 4 ground rods, one on each side of the fence.

Wire Support System: The use of 2" braced fiberglass corner and end posts strengthened the fence substantially. This allowed us to tighten the fence wires to 250lbs. tension. The 11/16" fiberglass line posts with snap-max clips maintained the wire spacing and increased the rigidity of the fence between corners. As noted this made it hard for the bears to ground out the fence by pushing wires together. It is difficult for the bear to push through the fence without coming into contact with at least two wires, one positive the other negative.

Wire Connections: All electrical connections were made using Nicro-press compression type sleeves and line taps guaranteeing a solid electrical connection.

Experience: Little work has been done to test electric fencing for polar bears since Stenhouse's (1981) and Clarkson's (1985). However, studies have continued in regards to grizzly bear fencing. The lessons learned have resulted in many improvements to fence design and our understanding of bears and how they react to electric fencing.

We consider the circumstances at test fence #1 to have presented the worst case scenario. The frozen soil and the snow-covered ground provided poor grounding to earth. Unlike test fence #2 there were no human structures to spook

17

the bears so their approach may have been less cautious. Further there were no dogs or humans to detect the bear or take any other deterrent action, i.e., dogs barking or scare cartridges. In other words test fence #1 constituted a poor situation for deterring polar bears as this scenario relied solely on electric fencing.

Coupled with lack of deterrents, the strong lure of the seal carcass and burning fat made the bears that approached test fence #1 very persistent in their efforts to penetrate the fence. Each of these bears tried to penetrate the fence at least twice; and one bear tried eight times in one visit. Even though the bears at test fence #1 were more persistent the fence prevented them from getting in and obtaining the bait.

At test fence #2, the dog mushers' lot, each bear only attempted to penetrate the fence once. Each time a bear was deterred by the fence the dog musher followed up the encounter by firing of a 12 gauge scare cartridge to increase the effectiveness of the deterrent action. Here the human structures, barking dogs and light from a hand held spot light combined to make the bears more nervous and cautious in their approach. However it should be noted that none of these things alone or in combination prevented the bears from approaching closer. In fact the dogs barking elicited an aggressive response (a charge from one bear).

The presence of dogs, lights and people, as in test fence #2 is similar to any of the outpost camps in Nunavut. Most problem polar bear kills occur from August to early November. During this season bear fencing would be an effective deterrent. The most effective method of reducing problem kills in outpost camps would be the combination of electric bear fencing, dogs and 12 gauge deterrents.

In conclusion, there is no deterrent that is 100% effective in all situations and electric fencing is no exception. However properly installed and maintained electric fencing is one tool that can be used in combination with others to effectively deter polar bears and reduce the number of problem polar bear kills in Nunavut.

LITERATURE CITED

Stenhouse, G.B. 1982. Bear detection and deterrent study Cape Churchill, Manitoba, 1981. NWT Wildlife Service Report No. 23 65 pp.

Stenhouse, G.B., L.J. Lee and K.G. Poole 1988. Some characteristics of polar bears killed during conflicts with humans in the Northwest Territories, 1976 - 86. Arctic Vol. 41. No.4 (December 1988) p. 275 - 278.

Clarkson, P.L. 1987. Bear Deterrent Study Cape Churchill, Manitoba, 1985. NWT Wildlife Service Report No.66 57 pp.

Wooldridge, D.R. 1978. Deterrent and detection systems. Rep. to the Government of the N.W.T. unpubl. rep. 55 pp.

Wooldridge, D.R. and B.K. Gilbert. 1979. Polar bear detection and deterrent systems. Rep. to the Government of the N.W.T. unpubl. rep. 37 pp.

ACKNOWLEDGEMENTS

Many have contributed to the success of this study to test electric fences on polar bears. The Government of Nunavut (GN) Department of Sustainable Development provided financial support.

The Manitoba Department of Natural Resources allowed us to conduct our tests in the Churchill area known as the polar bear capital of Canada. Wade Roberts, District Supervisor of the Churchill office, provided valuable advice and logistical support. Doug Clark of Parks Canada and his staff, Greg Lundie, Karen Lasser, Kevin Burke and Laurie Guyot monitored and completed observation reports for Test Fence #1 from October 26th to November 17th.

Harvey Lemelin, of the Northern Studies Center in Churchill, believed in the potential in spite of past efforts in fencing. He provided us the opportunity to test the fence design in actual field conditions, i.e., the dog mushers' lot. Dog mushers John Stetson, Backler and Akatsiak monitored and completed observation reports for test fence #2.

Shane Sather and Joe Savikataaq of the GN Department of Sustainable Development deserve special credit for all their efforts installing the test fences. They came to help build and monitor one fence and ended up building three; two as test fences and one for the Northern Studies Center to enclose a northern lights viewing area.

Many thanks goes to Jeff Marley of Margo Supplies Ltd. Not only did he assist in Churchill but he has provided years of support and encouragement to me and others throughout North America in animal control. Jeff has advanced the development of electric fencing as a deterrent for bears significantly.

Finally in the writing of this report, Brent Patterson, Kitikmeot Regional Biologist, has provided valuable scientific advice, guidance and editorial assistance. As well Jane McMullen has provided further editorial support along with a healthy helping of patience.

APPENDIX A-1

FENCE SPECIFICATIONS - FIBREGLASS POST SYSTEM:

- Electric fence charger (controller, energizer) - Parmak Solar Magnum 12, complete with built-in performance meter, twelve volt gel cell battery and five watt solar collector panel.
- Fence wire - 12.5 (.098") gauge hi-tensile galvanized with tensile strength of 200,000 to 240,000 psi and a breaking strength of up to 1800 lbs. pull.
- Corner/End Post Assemblies (Fig. ?) - 2" diameter x 8' length fiberglass of continuous glass filaments, durable resin and SunGard ultraviolet protective coating. Complete with steel anchor/ground plates & pins; galvanized connecting clamps and related hardware; wear plates & "U" clips.
- Line posts - 1 1/16" (0.68") diameter x 8' length fiberglass of continuous glass filaments, durable resin and SunGard ultraviolet protective coating complete with eight per post SnapMax galvanized spring clips.
- Ground rods - 5/8" diameter x 10' steel ground rods complete with bronze, three-screw type ground clamp.
- No. FW 2-3 Nicropress splicing sleeves, taps and No. 64-2345 or No. 32-234 Nicropress crimping tool.
- Zinc/Stainless Steel Medium "Gripple" wire connectors.
- High-density polypropylene all weather wire strainers with tension tool.
- Fence line and gate electric fence warning signs.
- Steel swing gate complete with post hangers.
- Polypropylene covered 12.5 gauge hook-up wire, fished through 1/2" ABS line, ends caulked for underground connections.

TOOLS USED:



Hilti Electro-Pneumatic Demolition tool model TE-804 complete with spade point, ground round pin driver and tamping plate.

Portable electric generator with an output of 2200 watts.

Parmak Digital electric fence tester.

Hand Tools: 2 - long handle spades, Fencers pliers, Lineman pliers, large common screw driver, #10 Robertson screw driver, Crescent wrench, wire stripper tool, Nicropress crimping tool, open end wrenches - 1/2", 9/16", 5/8", ? , ?, sockets - 1/2", 9/16", 5/8"

APPENDIX A-2

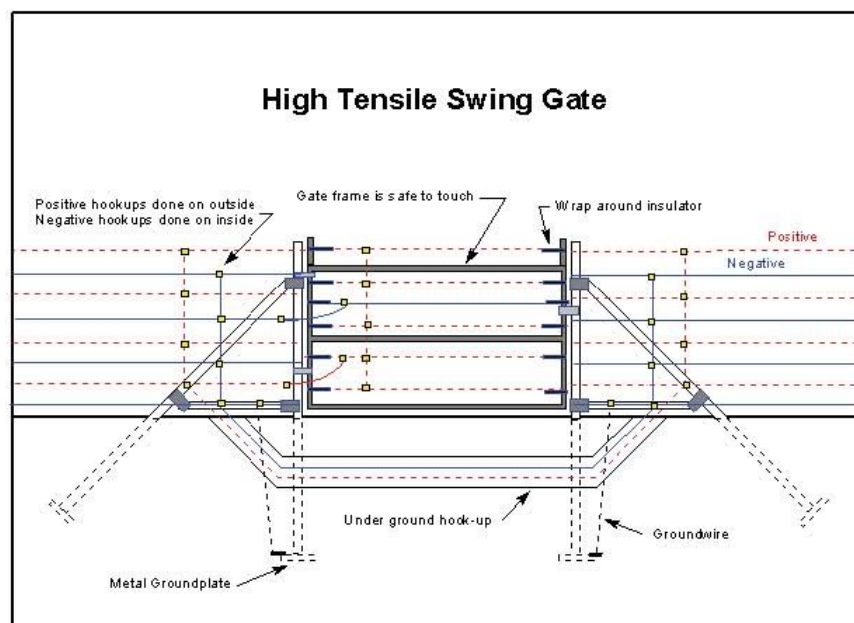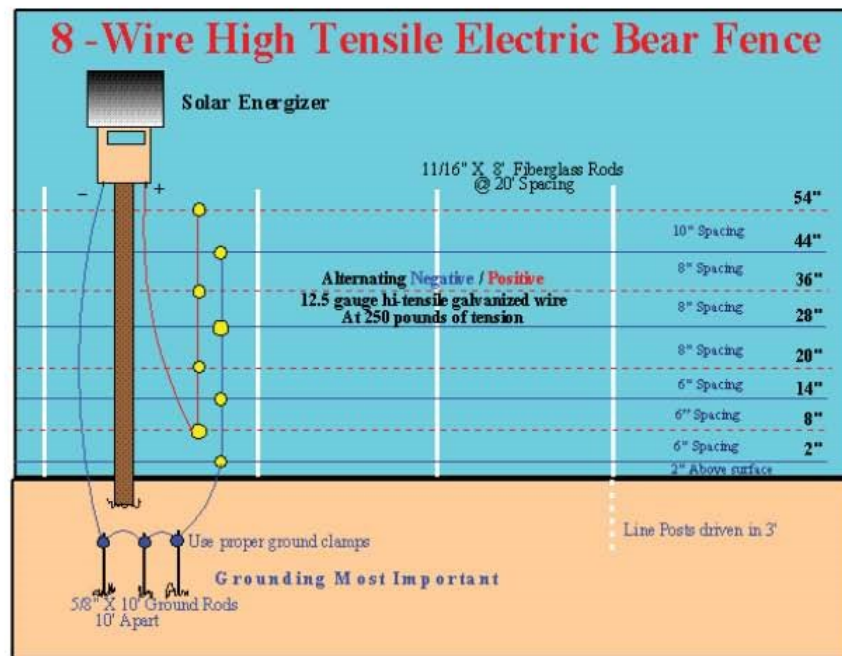

APPENDIX B**SPECIFICATIONS - VIDEO SURVEILLANCE CAMERA SYSTEM:**

Compu-tech systems Model RM-680-96 Video system sturdy complete with:

- Sony Handycam video Hi8 XR camera, model CCD-TR940/TR917 Hi8 with 18X (optical), 72X (digital) lens.
- WR-96 Wireless Receiver with 12- foot wire antenna.
- pre-viewing camera timer allowing for 9 to 99 second or 1 to 99 minutes taping per activation
- weather proof housing 10"x10"x6" with "through the lens" viewing ,
- two sealed and rechargeable lead acid 12 volt batteries plus smart charger

Surveillance Camera Mounting System - homemade see figure ??.

INFRARED SENSOR / TRANSMITTER (3):

- Compu-tech systems PIR-12-T Infrared sensor / transmitter powered by 3 "AA" batteries.
- Very narrow "window" detection zone of approximately 2' x 4' at 100 feet.
- Sensitivity adjustment.
- Five code setting dip switches.

23

APPENDIX C-1

POLAR BEAR FENCE TEST OBS# 3

DATE: 11/8/99 OBSERVERS: Backler, Akatt Siak

Wx: TEMP. 0°C WIND SPEED — DIRECTION —

% CLOUD COVER 100% SNOW / RAIN —

TYPE OF OBSERVATION: ☒ Actual ☐ Tracks ☐ Video

TIME FIRST OBSERVED: 1pm

BEHAVIOR: We first saw the bear a quarter mile from the fence
he ambled slowly toward the dogs. When he was ~~10~~ 10 feet
away he reared up and charged. Hitting the fence sent him back
at which time we fired 2 croaker shells. along with overs
yes TOUCHED FENCE WHAT LEVEL ie. wire 1, 2 3,4

Behavior just prior to touching fence: Bear stood then lunged
at the fence. When it hit it was back on all 4

REACTION: The fence sent the bear reeling. We then
shot croaker shells.

SEX: — AGE CLASS: Sub-Adult

DISTINGUISHING FEATURES: —

DID BEAR RETURN: No TIME: — OBS# —

Observation report from Test Fence #2 - Dog Musher's Lot

APPENDIX C-2

that one of our dogs broke his chain and proceeded to jump through the fence and chase the bear. The dog was on the bear for about 500 yards, then the bear got into the woods. The dog came back and we later found the bear's tracks a mile from that spot hustling in the other direction. We feel that this was the most effective bear deterrent yet. The jolt from the fence, the rocher shells and a dog on the bear's tail.

Continuation of Observation report from Test Fence #2 - Dog Musher's Lot

APPENDIX D


I have already provided you with a copy of the video footage and the Polar Bear Fence Test Sequences. An additional copy can be provided if you need one.

APPENDIX E

The hard copy of the report contains a copy of the "Permanent Hi-Tensile Heavy Duty Fibreglass Electric Fence System" installers manual. Copies are available. I am in the process of obtaining an electronic version of the installer's guide and once I have copies I will forward to Iqaluit.

Bear and Birdfeeders

Bird feeders are a major bear attractant and as more people move into bear country, they are becoming a major issue for bears and for bear managers. Bears cannot pass up an opportunity for an easy, tasty, high-calorie meal. Once bears become conditioned to visiting bird feeders, it's just a matter of time before they will encounter other attractants near residences and eventually become "nuisance" bears. Often these bears end up being permanently removed from the population.

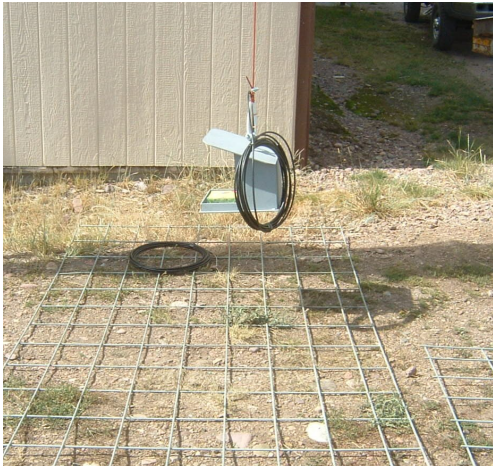

The bird feeder in the photos to the left has been electrified to discourage bears. Jamie Jonkel of Montana Fish, Wildlife & Parks helped develop the design for use as an aversive conditioning tool to teach bears NOT to visit bird feeders.

The bird feeder is suspended high above the ground, preferably at least 10 feet, and above a welded wire cattle panel. The wire panel on the ground has been connected to the grounding system of the energizer. Insulated cable (shown here with black coating) is used to connect the energizer (not shown here) to the feeder.



Birds that land on the feeder are not shocked because they are not grounded. Bears are shocked however when they stand on the grounded wire panel and touch their tongues or noses to the feeder.

Electrified bird feeders can be made out of steel or aluminum—aluminum feeders are much lighter weight and therefore easier to hang and re-fill.

NOTE: DO NOT PAINT electrified bird feeders because the coating of paint lowers the conductivity of the feeder.

Photos by Patti Sowka

Install a "Nuisance Bear Controller (NBC)" on bird feeders or other bear attractants.

The NBC can be modified or adapted for use in protecting a variety of attractants. The NBC utilizes two 6-volt batteries wired to a 12-volt automobile vibrator coil and condenser and trigger plate to deliver a 10,000-13,000 volt shock to the bear when activated.

The product can be ordered by contacting Marjorie Millett at itsone2@juno.com or by contacting Bears & Other Nuisances, P.O. Box 1185, Superior, WI 54880-5185 (USA).



Approximately \$300 plus shipping.

Information and photo provided courtesy of USDA-WS-National Wildlife Research Center.

Bears and Bees


Apiaries (bee hives) are another significant bear attractant. The honey produced by bees is definitely tempting to a hungry bear that might be passing through. Many bee keepers place apiaries in the same location year after year, and once a bear finds the hives, that location is locked into the bear's memory.

Electric fencing is being used effectively to deter bears from bee hives. The fencing can be more temporary so it can be taken down and stored in the off-season, or if the location will be used year after year, a more permanent fence can be constructed. Either way, electric fencing can be an effective and relatively inexpensive way to protect hives from bear predation.

Many wildlife management agencies recommend electric fencing to bee keepers. The designs may vary slightly, but the concept is the same. We have included electric fencing designs that are currently being recommended by several state wildlife agencies.

The information presented on the next two pages illustrates one possible design and specifications for electric fencing to deter bears from apiaries. For more information, contact Montana Fish, Wildlife & Parks and request a copy of the "bears and the bees" brochure.

Photo courtesy of the Living with Wildlife Foundation.

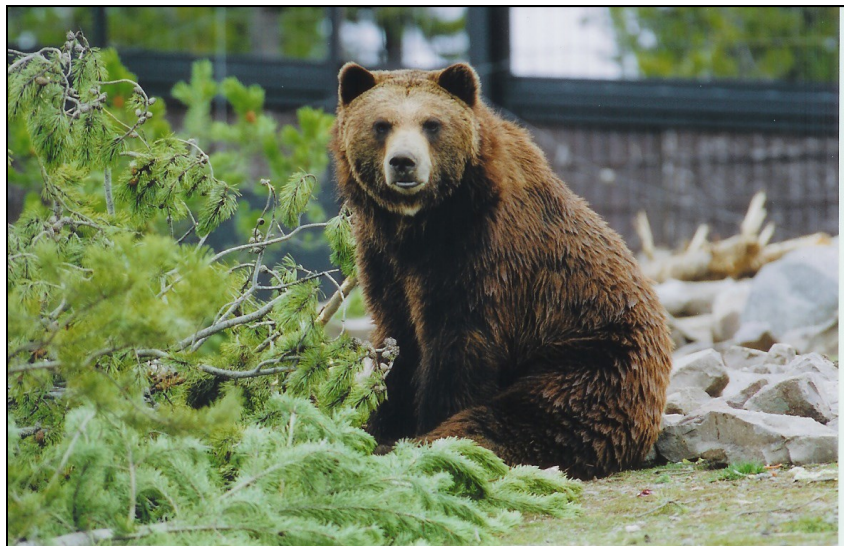

Please report any frequent or continued bear activity on your property to the bear manager for your area. Even if the bear's activity isn't a problem at the time, the behavior often escalates to a point where it requires management action, such as the relocation and/or ultimately, the killing of the bear.



**Montana Fish,
Wildlife & Parks**

Living with Predators

The "Electric Bee Yard Kit"

The following directions are for the **30' x 30'** bee yard.

Materials:

- Sixteen 16' cattle panels
- one bag of Gallagher Insultimber Dropper Clips (G702)
- thirteen 6.5' T posts
- two 5" 1 1/4" diameter fiberglass posts
- thirty-nine 2" electric fence T-post insulators
- two 3' ground rod with a clip
- one piece of 30' to 40' of insulated cable
- 5 line clamps
- 2 electric fence spring loaded gate handles
- four electric fence signs
- one 6.5' T-post to mount energizer (optional)
- energizer of your choice

Directions:

- Find an appropriate location for your electric fence. If the fence energizer requires a direct power source make sure the distance corresponds to the length of the power cord. The site should be flat and cleared of vegetation.
- Lay eight cattle panels down on the ground, two per side, and form a perfectly square 36.5' x 36.5' pad. Wire the ends and sides where the four wings of the ground pad come together. Do not overlap the cattle panels. Use Gallagher Insultimber Dropper Clips (G702) to wire the panels together.
- Using the eight remaining cattle panels, two per side, build a 30' x 30' erect fence over the ground pad. Each side, except for the gate, will consist of two 16' cattle panels overlapped and wired together with insultimber clips to form a 30' side. The two remaining 16' cattle panels will be used for the gate. Wire the corners together with insultimber clips and position the fence in the middle of the ground pad.

- Drive the thirteen 6.5' T posts at panel ends and centers (except for the gate) leaving 8" to 10" above the cattle panel. The posts should be evenly spaced at four 7.5' wide intervals. Using three T post insulators per post attach the cattle panel fence to the T-posts.

The insulators should be attached in such a way that the cattle panel fence is suspended at least five inches off the ground. Bring the two panels that form the gate together and attach the two fiberglass posts to the ends of the cattle panels with insulclips. The two posts should be slightly offset and positioned in such a way that the gate handles will snugly pull the ends of the gate together.

- Wire the two gate handles on the bottom and the top of the left cattle panel near the post. Using the insulclips make two catch loops for the gate handles on the right cattle panel near the second post.

Open up the gate by picking up the right cattle panel and walking back. The opening of the gate can be larger by picking up the left cattle panel and walking back. The gate opening should be large enough to allow a flat bed truck to be pulled in and out of the fenced area. Close and latch the gate.

- Choose the location of your energizer and determine how you will turn it on and off. The energizer can be mounted on a wall, tree or metal T-post inside the fenced area. After mounting the energizer cut two pieces of insulated cable for the hot wire (+) connection and ground wire (-) connection.


The (+) wire will need to go from the (+) connection on the energizer to the back of the fenced area opposite the gate. The insulated cable needs to be attached with a line clamp and strung or woven in such away that the connections will not be pulled loose by a bear walking around the fence.

- Pick a spot on the cattle panel pad that is closest to the energizer and pound in one ground rod. Pound the second ground rod ten feet from the first ground rod. The (-) insulated cable will need to go from the (-) connection on the energizer to the spot where the first ground rod and the cattle panel pad come together.

The insulated cable needs to be attached to the cattle panel and the ground rod with line clip and strung or woven in such away that the connections will not be pulled loose by a bear walking around the fence. Using the remaining insulated cable and last two line clamps connect the second ground rod to the first ground rod. Post four electric fence signs at the site.


Deterring Bears From Bee Yards


Information Courtesy of Montana Fish, Wildlife & Parks

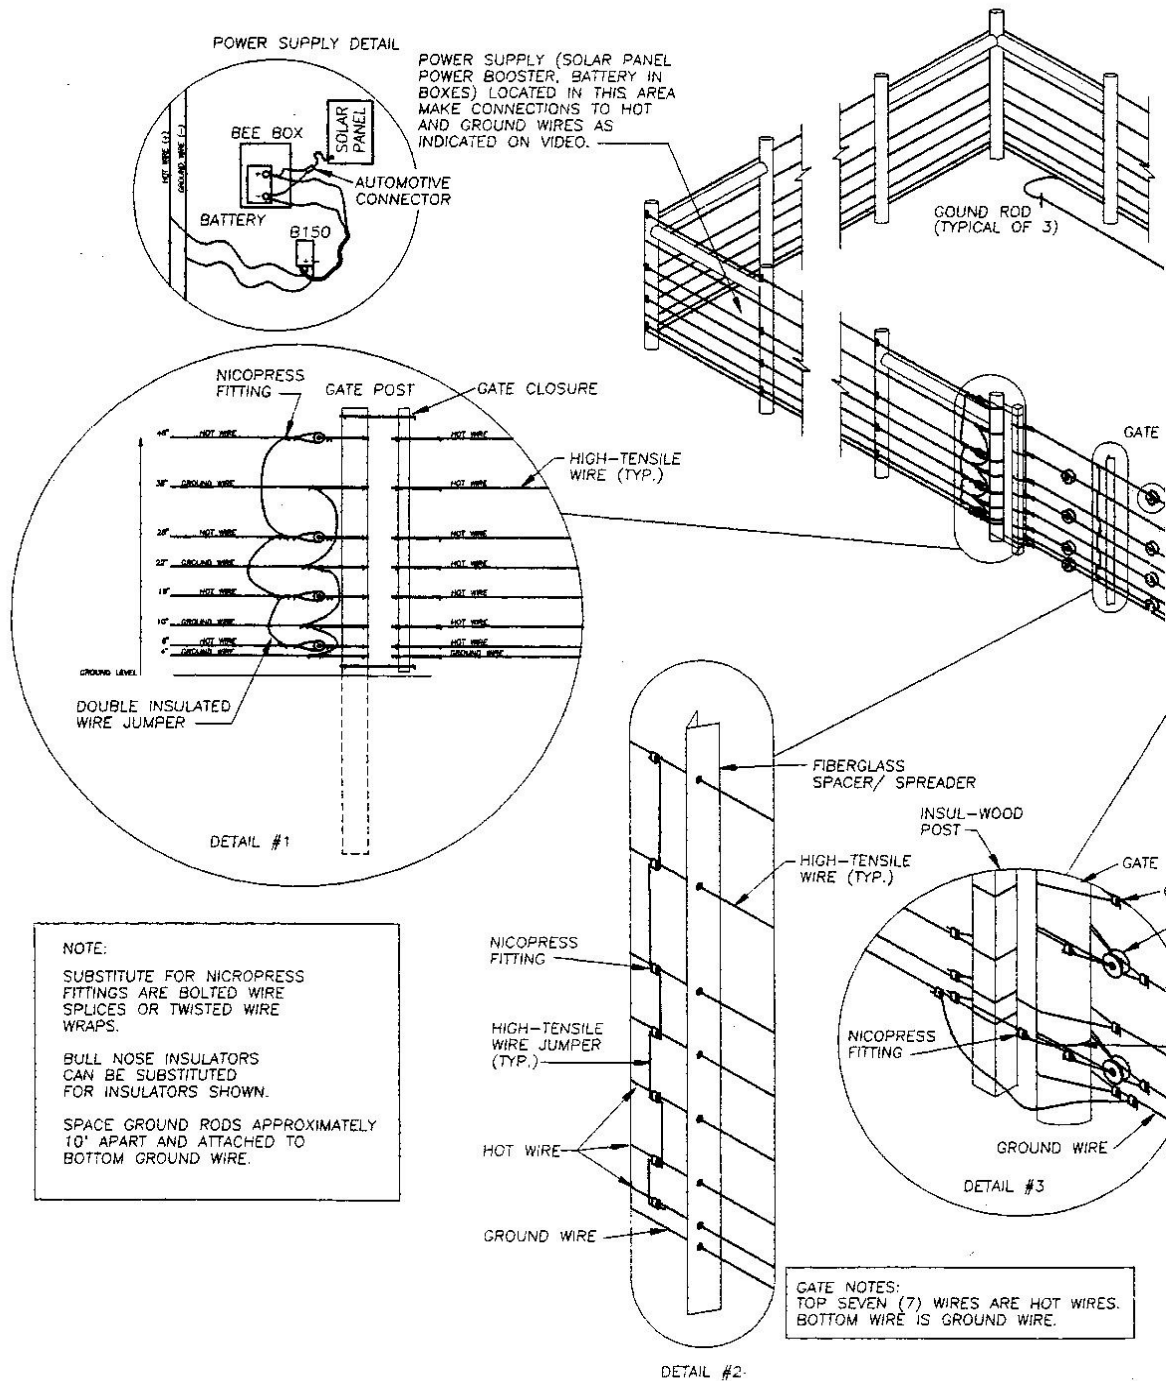



BEE YARD - BEAR FENCE
40' x 40' SIZE

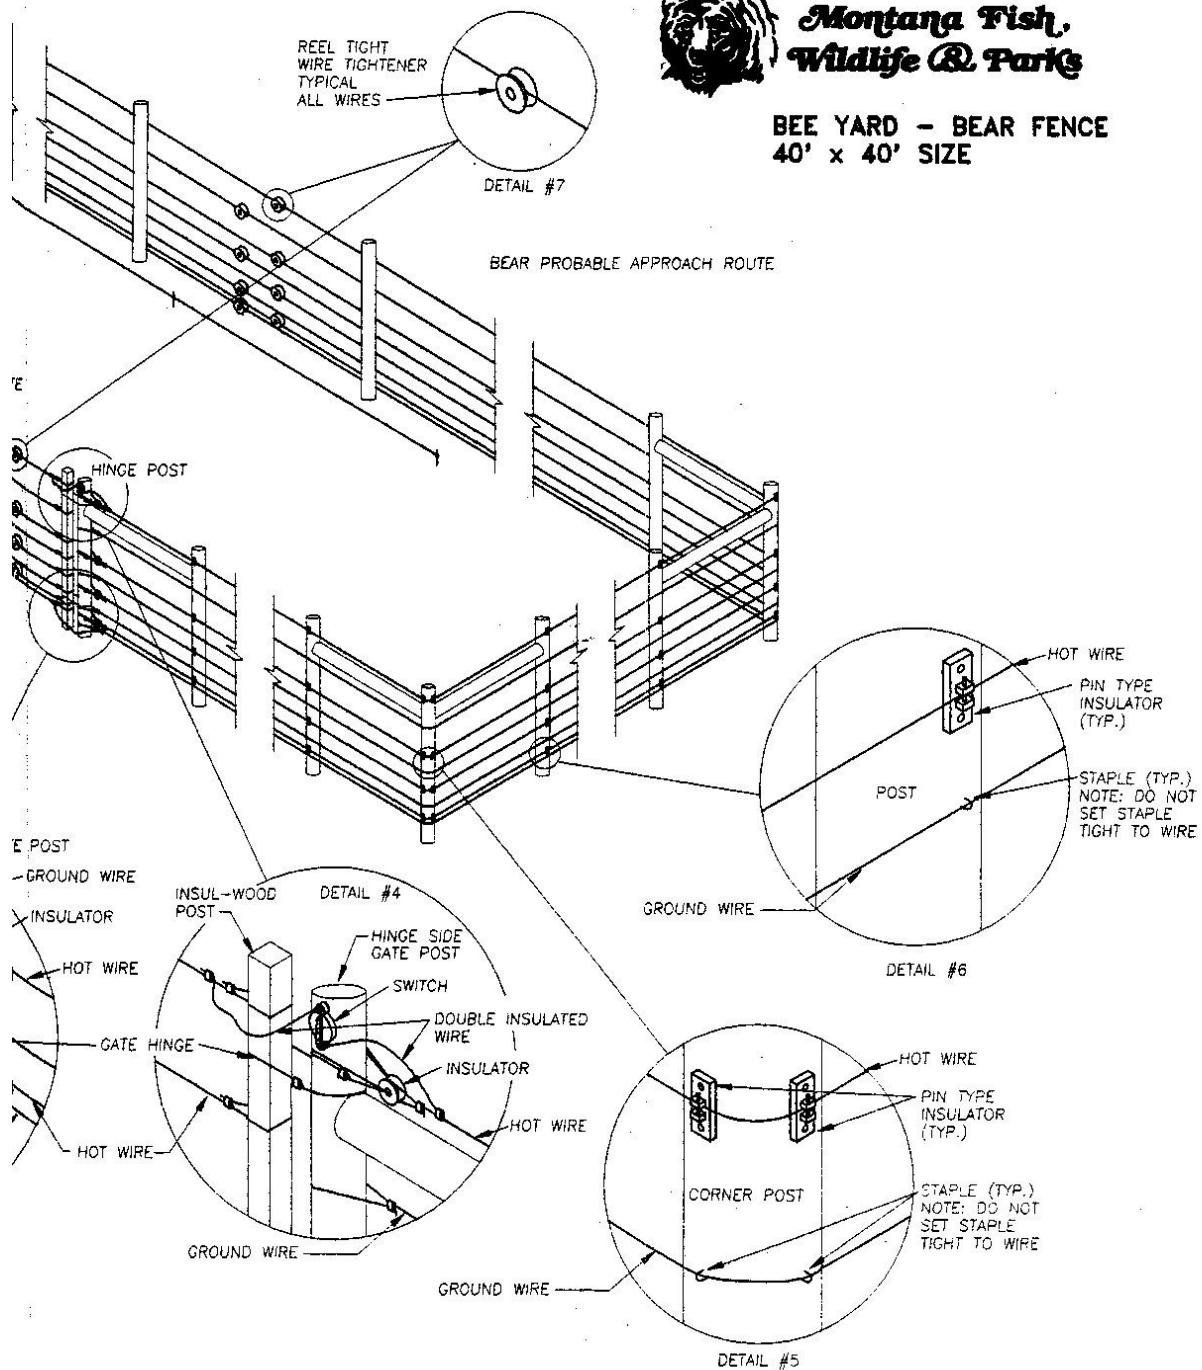


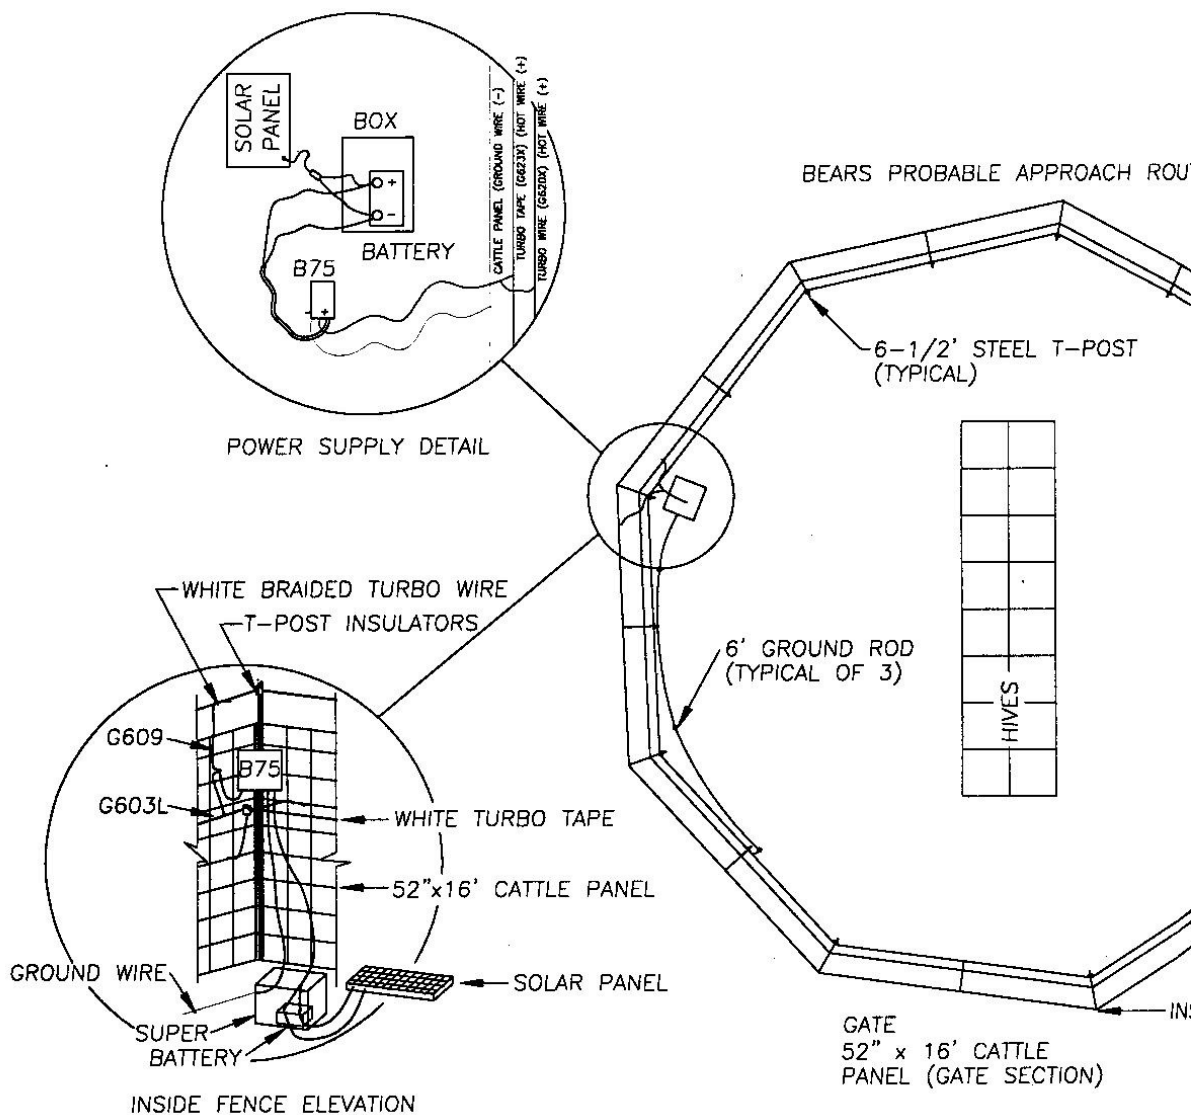

NOTE:


PRODUCTS REFERED TO ARE GALLAGER.

1. LAY WELDED CATTLE PANELS IN A CIRCLE.
2. DRIVE A 6-1/2' TO 7' STEEL T-POST AT PANEL ENDS AND CENTERS LEAVING 8"-10" OF POST ABOVE PANEL.
3. CONNECT PANELS TO T-POST WITH GALVANIZED CLIPS OR DOUBLE GALVANIZED WIRE. GALVANIZED TIE-WIRE TO BE TIED FROM INSIDE. TIE AT THREE (3) PLACES EACH T-POST.
4. INSTALL OFFSETS (G659P) AND INSULATORS (G681L) ON FENCE T-POSTS AND WELDED PANELS.

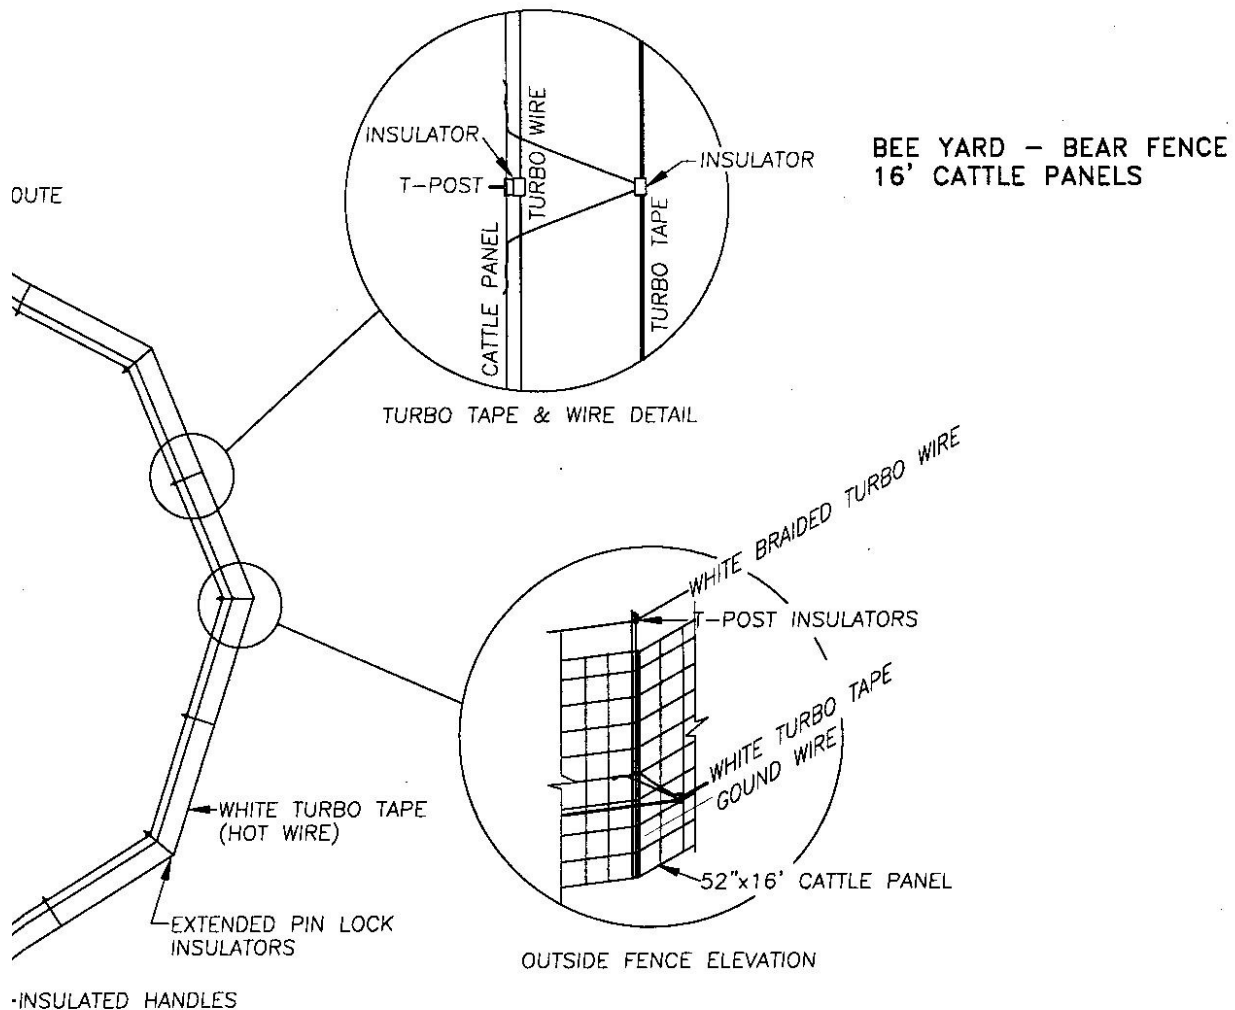

5. INSTALL TURBO PRODUCTS IN OFFSETS (G659P) AND INSULATORS (G681L).
6. INSTALL GROUND RODS AND CONNECT THE 6' GALVANIZED RODS WITH A GALVANIZED WIRE (G609). SPACE GROUND RODS AT LEAST 10' APART. ATTACH TO BOTTOM OF CATTLE PANEL.
7. CONNECT TURBO WIRE (G620X) TO TURBO TAPE (G623X) WITH DOUBLE INSULATED, GALVANIZED CABLE (G609) AND JOINT CLAMPS (G603L).
8. INSTALL BATTERY AND B-75 ENEGIZER IN SUPER.
9. CONNECT SOLAR PANEL TO BATTERY CLAMPS.
10. CONNECT B-75 ENEGIZER TO TURBO PRODUCTS AND HOOK B-75 ENEGIZER TO BATTERY.

Bee Yard—Bear Fence 32' x 32' size

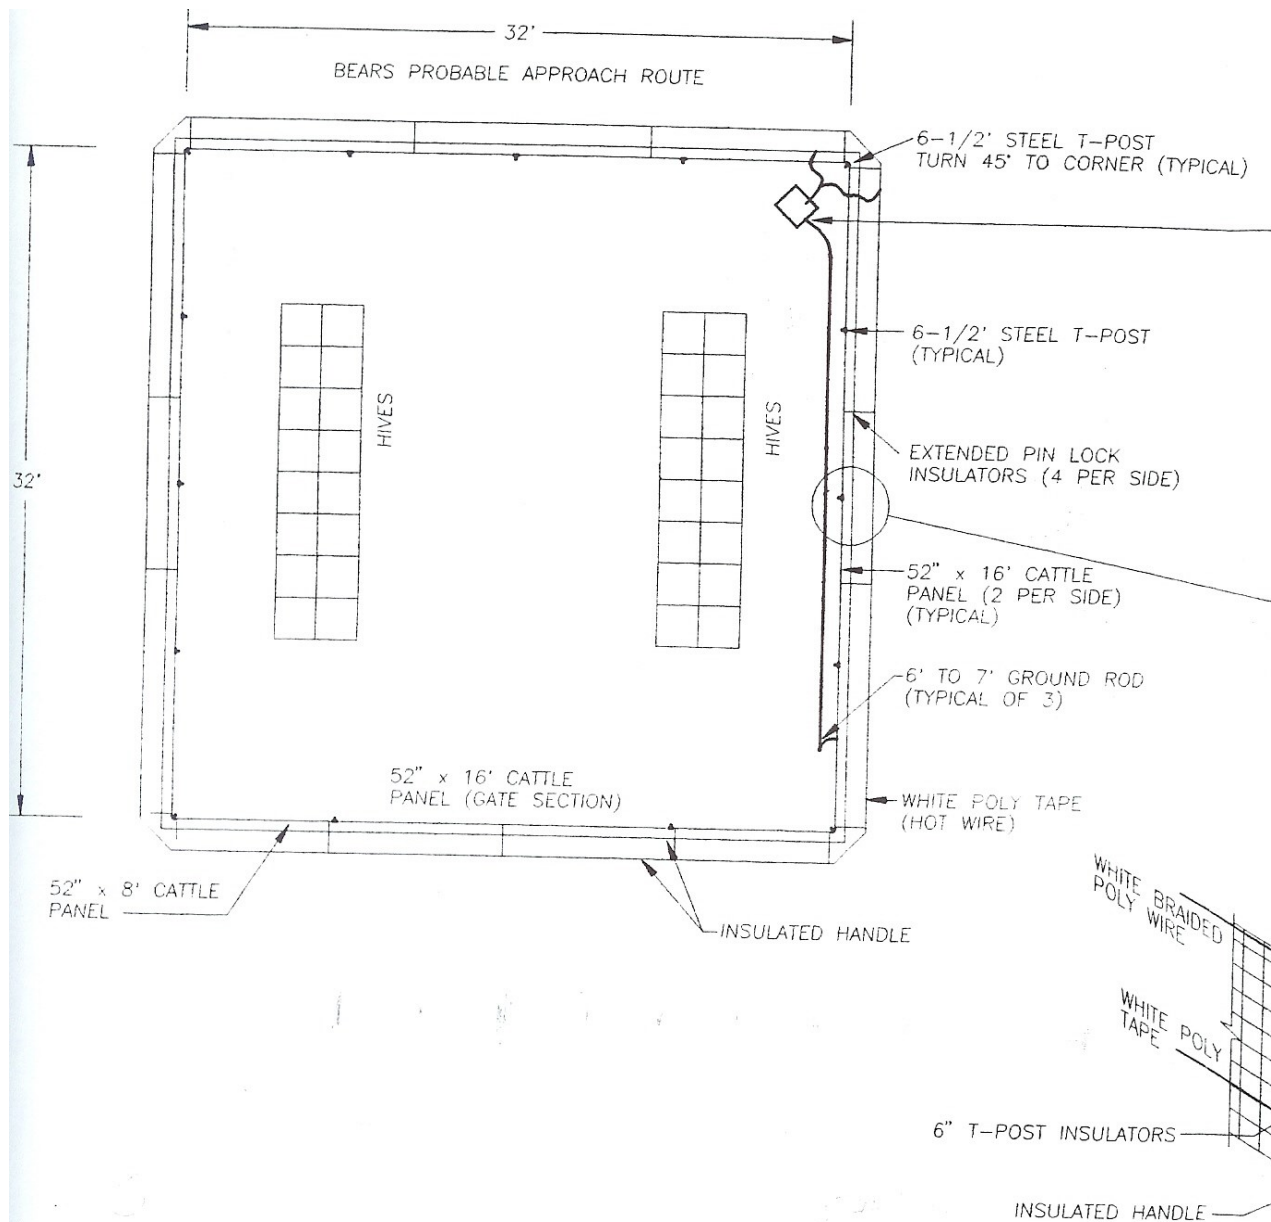

Bee Yard—Bear Fence 32' x 32' size (continued)





**Montana Fish,
Wildlife & Parks**

BEE YARD - BEAR FENCE 32' x 32' SIZE

POWER SUPPLY DETAIL


POWER SUPPLY (SOLAR PANEL POWER BOOSTER, BATTERY IN BOXES) LOCATED IN THIS AREA MAKE CONNECTIONS TO HOT AND GROUND WIRES AS INDICATED ON VIDEO.

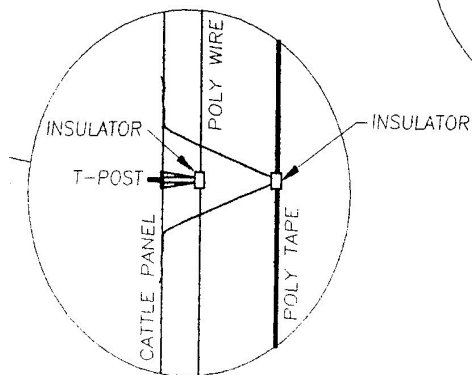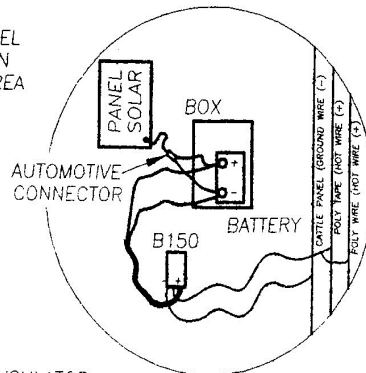

POLY TAPE & WIRE DETAIL

NOTE:

SPACE GROUND RODS APPROXIMATELY 10' APART AND ATTACHED TO BOTTOM OF CATTLE PANEL.

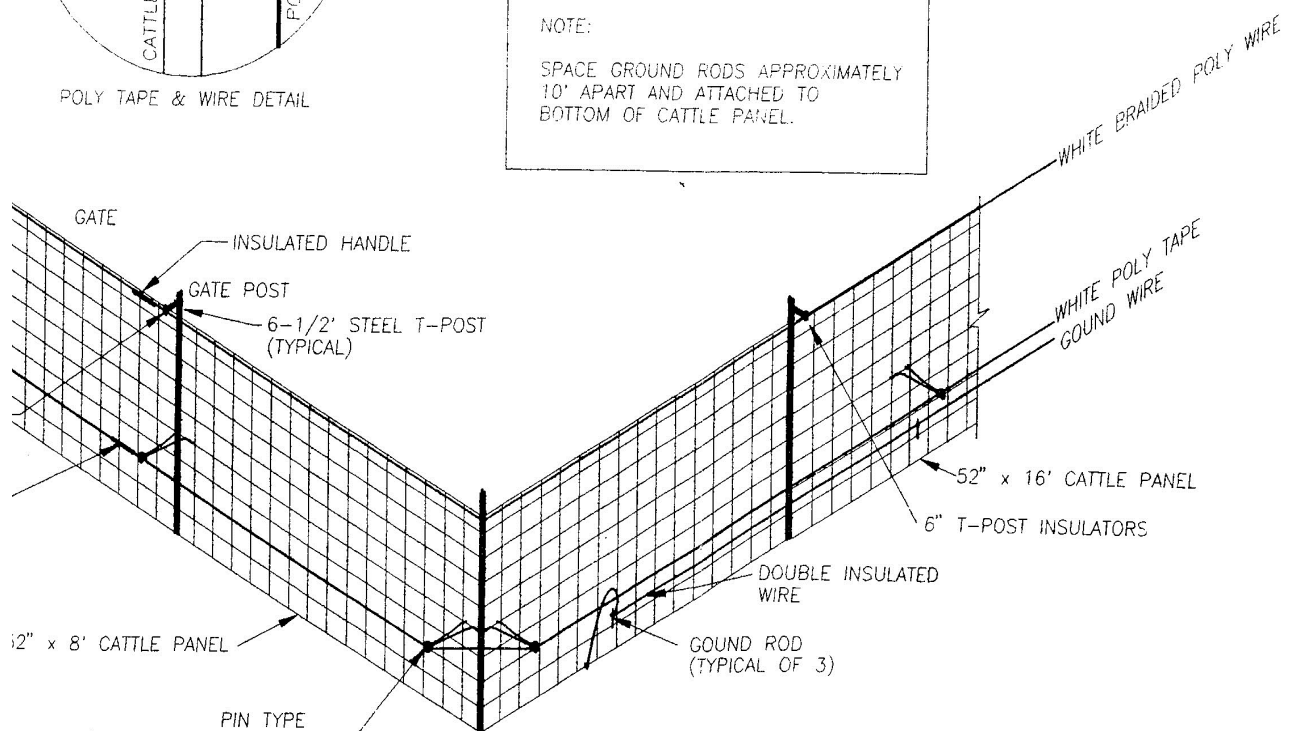



December 2001

Florida Fish and Wildlife Conservation Commission Technical Information Bulletin

Use of Electric Fencing to Exclude Bears and Prevent Property Damage

Electric fencing has proven effective in deterring bears from entering landfills, apiaries (beehives), livestock pens, gardens, orchards, and other high-value properties. Numerous electrical fence designs have been used with varying degrees of success. Design, quality of construction, and proper maintenance determine the effectiveness of an electric fence. The purpose of this technical bulletin is to assist the property owner in understanding and implementing electrical fencing as a tool to exclude and prevent damage caused by black bears.

Understanding Electric Fencing

Electric fencing provides an electrical shock when an animal comes into contact with the electrically charged wires of the fence. People unfamiliar with electric fencing often are afraid that it will injure, permanently damage, or kill an individual or pet that contacts the fence. **This is not true!** A properly constructed electric fence is safe to people, pets, and bears.

Components of Electric Fencing

An electric fence is composed of four main elements: a charger, fence posts, wire, and the ground rod.

Fence Charger.

On a small scale electric fence (like that typically needed for bear exclusion), the largest cost is normally the fence charger. A fence charger's job is to send an electrical pulse into the wire of the fence. Contrary to popular belief, there is not a continuous charge of electricity running through the fence. Instead the charger emits a short pulse or burst of electricity through the fence.

The intensity and duration of the electrical pulse varies with the type of charger or controller unit. Chargers with a high-voltage, short duration burst capacity are the best because they are harder to ground out by tall grass and weeds. These types are also the safest, because, even though the voltage is high (5 kilovolts) the duration of the burst is very short (2/10,000 of a second) (FitzGerald, 1984).

Two basic energy sources for chargers are batteries (12-volt automotive type) and household current (110 volt). Battery-type chargers are typically cheaper to purchase but require more maintenance because of the necessity of charging the battery. The advantage of a battery powered charger is that it can be used in a remote location where 110-volt current is not available. Most units that are powered by a fully charged 12-volt deep-cycle batteries can last three weeks before needing a charge. Addition of a solar trickle charger will help prolong the duration of effective charge in 12- volt batteries.

Fence Posts.

On small scale fences, the posts are normally the second largest expense involved in construction. Therefore, when planning an electric fence it is a good idea to utilize existing fencing in order to save money. If no existing fence is available, posts will need to be placed around the area needing protection. Posts may be wood, metal, plastic, or fiberglass. Wood and metal posts will need to have plastic insulators attached to them which prevent the electric wire from touching the post causing it to ground out. Plastic and fiberglass posts do not need insulators, the wire may be affixed directly to these posts. Wood and metal posts are typically more expensive and require the added expense of insulators, however, they are more durable and generally require less maintenance.

Wire.

Fourteen to seventeen gauge wire is the most common size range used in electric fencing. Heavier wire (a lower gauge number) is more expensive but carries current with less resistance and is more durable (FitzGerald, 1984).

The two most common types of wire are galvanized and aluminum. Galvanized wire is simply a steel wire with a zinc coating to prevent rust, which makes the wire last longer. Some wire is more galvanized than others. The degree or amount of zinc coating that is around the core steel wire is measured in three classes. A class I galvanization means the wire has a thinner coating of zinc than a class II galvanization. Class III galvanized wire has the heaviest zinc coating and will last longer than the class I and class II wire (FitzGerald, 1984). In general, the cost of galvanized wire increases as the class or amount of galvanization increases.

Aluminum wire is typically more expensive than the galvanized wire. Some advantages of aluminum wire are: it will not rust, it conducts electricity four times better, and it weighs one-third less than steel wire.

The Ground Rod.

The ground is an often overlooked, but critical part of an electric fence. Without a good ground, electricity will not flow through the wire. When an animal touches a charged wire, the body of the animal completes the electrical circuit and the animal feels the "shock". The current must travel from the charger through the wire to the animal and then back through the ground to the charger if the animal is to feel the shock. The soil acts as the return "wire" (ground) in the circuit. However, if a bird was to land on a charged wire without touching the soil the bird would not complete the circuit and would be unaffected (FitzGerald, 1984). Some fence configurations use actual grounded wires within the fence to enhance the grounding system.

The ground may be a commercial ground rod or a copper tube or pipe driven six to eight feet in moist soil. Copper is expensive, so a copper coated steel pipe or any other good conducting metal pipe will work also. Very dry soil can effect the ability to create a good ground and has sometimes been a problem during drought conditions. Pipe may be a better choice than a solid rod during drought conditions, because water may be poured down the ground pipe to improve the ground. Some fence configurations use wires as the grounding system, rather than relying solely on the soil as a ground.

Recommended Electric Fence to Deter Black Bears

Conditions at fence sites will vary and will determine what the most effective fence configuration will be. Commission biologists welcome the opportunity to visit sites and provide custom tailored advise on constructing an effective electric fence. The following recommendation will cover most situations with low to moderate pressure from black bears. Use a five strand aluminum wire fence that is 40 inches high with wire spacing every eight inches apart using the previously mentioned wired grounding system (see Figure 1).

The wire closest to the ground level (the lowest wire) should be a charged or "hot" wire. The second wire should be grounded. The third wire should be hot. The fourth wire should be grounded and the fifth wire should be hot. If using metal or wood posts, insulators must be used to keep the hot wires from grounding out. The cost of this type of electric fence utilizing fiberglass posts and a 110 volt fence charger is approximately \$200 for a 40' x 40' area (160 linear feet of fence).

Materials:

- 1 - 1, 312 foot roll (1/4 mile) 14 gauge aluminum electric fence wire
- 1 - 50 foot roll 12 gauge insulated wire
- 20 - 5 foot 5/8 inch dia fiberglass fence posts
- 5 - plastic gate handles
- 1 - 110 volt fence charger
- 1 - 10 foot ground pipe
- 4 - plastic electric fence signs

Installation.

These instructions are for a square shape fence exclusion, but the process would be very similar for other applications.

- Drive 4 corner posts 1-foot deep into ground and stake with guy wires.
- Clip, rake, and keep clear any vegetation in a 15-inch wide strip under the fence and apply herbicide.
- Attach and stretch the aluminum wire at 8-inch increments starting 8 inches from ground level. A loop of wire should be left on each wire at the first corner post. Once the wire has been stretched around the outside of all the corner posts back to the first post a plastic gate handle should be attached to each wire and the gate handles should be attached to each corresponding loop on the first corner post.
- Drive in the remaining 16 posts to the same depth at 8-foot intervals between corner posts.
- Secure each of the five wires to each of the posts with additional wire. Attach four plastic electric fence signs (one on each side) to the top wire of the fence.
- Attach a 12-gauge strand of insulated wire to the positive terminal of the fence charger and attach it to the first, third, and fifth wires of the fence.
- Attach another 12 gauge insulated wire to the negative terminal of the charger and attach this wire to the ground pipe which has been driven into the ground 6 to 8-feet deep.
- Attach another 12 gauge insulated wire from the negative terminal of the charger to the second and fourth wires on the fence.
- Plug the charger into a 110 volt power supply and the fence is in operation.

Tips to improve the effectiveness of your electric fence to deter black bears:


1. If using a 12-volt fence charger, ensure that the battery is charged; check every two weeks.
2. Make sure terminals on the charger and battery are free of corrosion.

3. Make sure hot wires are not being grounded out by tall weeds, fallen tree branches, broken insulators, etc.
4. If fence wires have been broken and repaired, make sure wires are corrosion free where they have been spliced together. Also, tighten the fence at each corner post as wires that have been spliced and are loose make poor connections.
5. Be sure to rake vegetation from under and around the outside of the fence as this may act as an insulator.
6. To improve the ground around the perimeter of the fence add a piece of 24 inch chicken wire laying on the ground around the outside of the fence. This should be connected to ground.
7. During periods of drought pour water down the ground pipe and around the ground pipe to improve the ground. Digging a 6 inch deep 6 inch diameter hole around the ground pipe and back filling with rock salt will also improve the ground. Additional ground pipes may also be added to portions of the fence farthest from the charger.
8. To ensure that the bear solidly contacts the charged portion of the fence, a bait like bacon strips, a can of sardines, or tin foil with peanut butter may be attached to one of the top hot wires. Make sure these do not contact the ground, thus shorting out the fence.
9. When protecting a specific structure (like a shed or rabbit hutch), the fence should be placed 3 to 5 feet away from the structure (rather than on it) so that the bear encounters the fence before reaching the attractant.
10. Protect the fence charger from the elements by covering it with a plastic bucket or a wooden box.
11. Place plastic electric fence signs around the perimeter of your fence to improve visibility and to warn other people.

LITERATURE CITED

FitzGerald, James (1984), *The Best Fences*. Storey Publishing Bulletin A-92, Pownal, Vermont. p. 14-16.

Figure 1. Diagram of properly constructed electric fence to exclude bears.

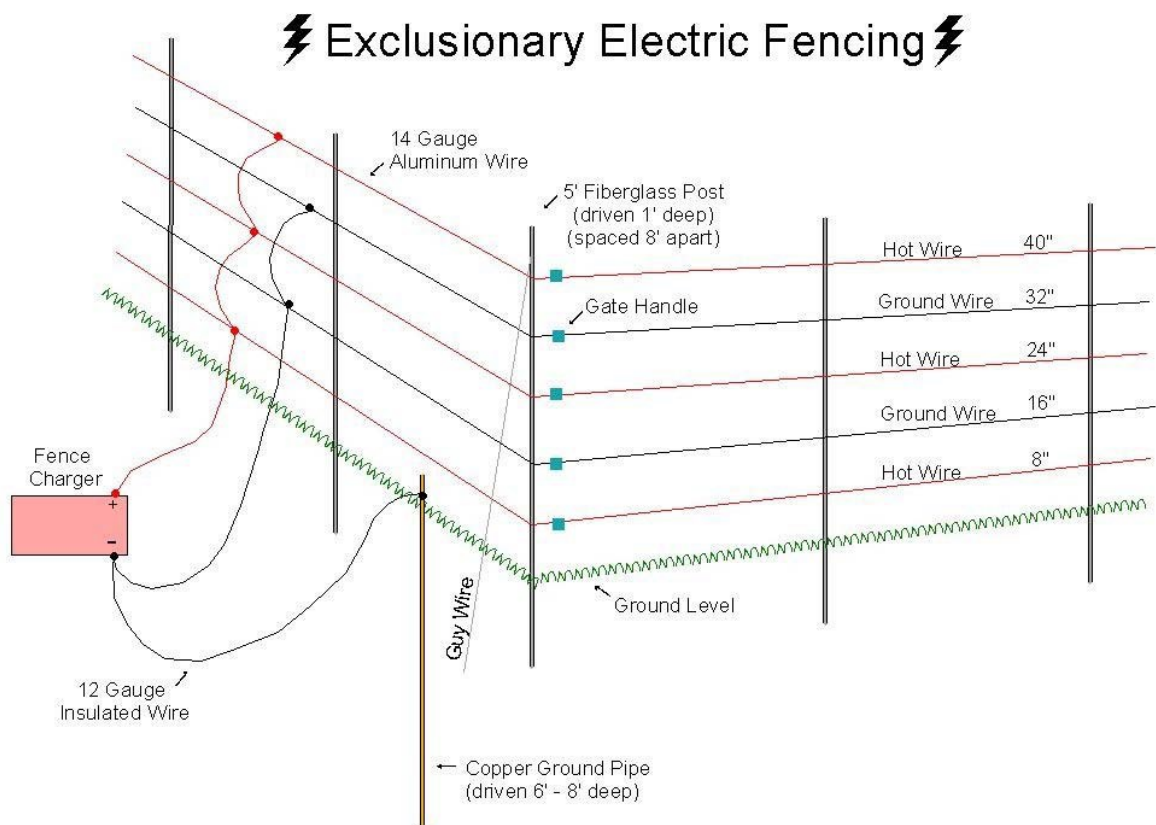

This information is provided by the Florida Fish and Wildlife Conservation Commission and is available through their web site. Please visit :

http://www.myfwc.com/WILDLIFEHABITATS/Bear_brochures.htm



ELECTRIC FENCING FOR BLACK BEARS **



Electric fencing has proven effective in deterring bears from landfills, apiaries, cabins, and other high-value properties. Fencing, however, is a relatively expensive abatement measure. Consider the extent, duration, and expense of damage when developing a prevention program.

Numerous fence designs have been used with varying degrees of success. Electric fence chargers increase effectiveness. Electric fences must deliver an effective shock to repel bears. Bears can be lured into licking or sniffing the wire by attaching attractants (salmon or tuna tins and bacon rinds) to the fence. Depending on the amount of bear pressure, use an electric polytape portable fence or a permanent fence. An innovative technique for beekeepers is to place hives on a fenced (three-strand electric) flatbed trailer (8 feet x 40 feet). Though expensive, this method makes hives less vulnerable to bear damage and makes moving them very easy.

Materials. Do not buy cheap materials to reduce costs. This will only reduce the effectiveness and life span of the fence. We recommend using:


- (1) Round fiberglass or treated wood posts.
- (2) High-quality galvanized wire and steel components. For high-tensile fences, use 11- to 14-gauge wire (minimum tensile strength of 200,000 pounds and a minimum breaking strength of 1,800 pounds, tension springs, and in-line tensioners.
- (3) Compression sleeves for splicing wires and making electrical connections.
- (4) Lightning arresters and diverters to protect chargers.
- (5) High-quality fence chargers. To energize the fences, use a 110-volt outlet or 12-volt deep cell (marine) battery connected to a high-output fence charger. Chargers must be approved by Underwriters Laboratories (UL) or the Canadian Standards Association (CSA). We highly recommend 110-volt chargers. Six and 12-volt chargers require battery recharging every 2 to 4 weeks. Use solar panels in remote areas to charge batteries continuously. For high-tensile fences, use high-voltage, low-impedance chargers only (3,000 to 5,000 volts and current pulse duration of at most 1/1,000 second). Place the fence charger and battery in a case or empty beehive to protect them against weather and theft.
- (6) Gates. There is no universal gate design because of the many different fence types. Gates should be electrified, well insulated, and practical for the type of farming operation. Gates range from single strands of electrified wire with gate handles to electrified panel or tubular gates.

Fence Construction. Fences must be properly constructed—do not deviate from fence construction guidelines.

- (1) Prepare fence lines before construction. It is easier and less expensive to install and maintain fences on clear, level runs. Minimize corners to increase strength and reduce costs.
- (2) Ensure that the electrical system is well grounded at the fence charger and every 1/2 mile of fence line. To ground high-tensile fences, drive four to six ground rods 5 to 6 feet deep and 6 feet apart. Connect the ground post of the fence charger and the negative (-) wires of the fence to the grounding rod with a wire and ground clamp. Grounding may be increased, especially in dry, sandy soil, by laying grounded chicken wire around the outside perimeter of the electric fence.
- (3) A positive-negative fence is especially useful with dry or frozen ground. A fence with all positive (hot) wires may be advantageous under general crop and soil moisture conditions. Use connectors to ensure good contact. Connect the positive fence terminal to the fence with a short piece of fence wire.
- (4) Rigid brace assemblies—corners, ends, and gates—make up the backbone of all high-tensile fence systems. They must be entirely rigid, constructed of the best materials, and strictly conform to design guidelines. The single-span brace assembly is the basis of all high-tensile strainer assemblies, regardless of location in the fence or fence design. This basic design is then modified to create double-"H" braces, swing corners, and gate ends.
- (5) Allow wires to slide freely through insulators on fence posts. Fence flexibility is necessary to endure frequent temperature changes, deer hits, and obstructions.
- (6) Identify an electric fence with warning signs.

Maintenance. Regular inspection and maintenance are necessary to ensure the effective operation and longevity of most fences.


- (1) Control vegetation near fences by mowing or applying herbicides to avoid excessive fence grounding by weeds.
- (2) On slopes or highly erodible soils, maintain a good sod cover beneath fences to avoid fence line erosion.
- (3) Always keep the fence charger on. Check the fence voltage weekly with a voltmeter. Maintain at least 3,000 volts at the furthest distance from the fence charger. Always recharge the batteries during the day so that the fence is energized at night.
- (4) To protect against voltage loss, keep the battery and fence charger dry and their connections free of corrosion. Disconnect the lower wires if they are covered by snow. Make certain all connections are secure and check for faulty insulators (arcing between wire and post).
- (5) Each month, check the fence tension and replace baits with new salmon tins and bacon rinds.
- (6) In late fall and early summer, adjust the fence tension (150 to 250 pounds) for high-tensile fences.

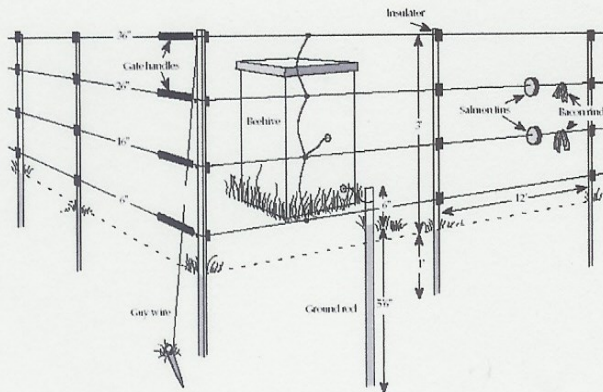

Polytape portable electric fence. One person can easily and quickly install this fence. It is economical and dependable for low to moderate bear pressures. The fence consists of four strands of electric polytape that are attached to posts with insulators. Various forms of polytape or polywire, such as Visible Grazing Systems® (VGS), Baygard®, and Turbo-tape® are very strong and portable. The cost per fence (33 x 33 feet) is about \$200. (~ \$1.50/linear ft)

- 1 200-yard roll of polytape
- 12 4-foot fence rods (5/16-inch diameter)
- 48 Insulators or clips
- 4 Gate handles
- 1 12-volt fence charger
- 1 12-volt deep cycle battery
- Herbicides


To install: Drive in four corner posts 1 foot deep and attach a guy wire. Clip vegetation in a 15-inch-wide strip under the fence and apply herbicide. Attach insulators on the inside of corner posts and stretch the electro-plastic wire from the four posts at intervals of 6, 16, 26, and 36 inches from ground level. Hand tighten the polytape and join the ends with four square knots. Drive in the remaining posts at 12-foot intervals, attach insulators (on the outside of line posts), and insert polytape.

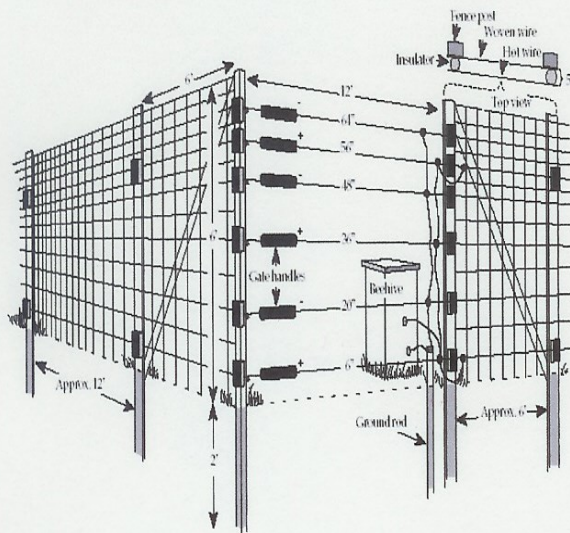

Woven-wire permanent electric fence. This fence, best used under high bear pressure, is the most durable and expensive barrier. Two people can install it in 8 hours. The fence consists of heavy, 5-foot woven wire, supported by wooden posts, ringed by two additional electrified wires. Cost per fence (33 x 33 feet) is about \$400. (~ \$3.00/linear ft)

- 1 50-yard roll of 6-inch square mesh, 5-foot woven wire
- 1 150-yard roll of high-tensile (14-gauge) smooth wire
- 24 8-foot treated wooden posts
- 40 Porcelain strain-insulators (screw-in types)
- 1 2-pound box of 1 1/2-inch fence staples
- 6 gate handles
- 1 12-volt fence charger
- 1 12-volt deep cycle battery
- Herbicides

To install: Set posts 6 to 12 feet apart in 2-foot-deep holes. Align four corner posts at 5° angles from the vertical. Brace corner and gate posts from the inside with posts set at 45° angles. Clip a 15-inch-wide strip clear of vegetation under the fence and apply herbicide. Place one length of welded wire vertically into position and staple the end to a corner post. Pull the entire length of wire taut with a vehicle and staple the welded wire to the line posts. Continue until all sides, except the gate opening, are fenced. Fasten two strands of high-tensile wire to insulators positioned 5 inches away from the welded wire, at intervals of 6 and 56 inches above ground level. For a 12-foot gate opening, attach three strands of high-tensile wire to insulators on the gateposts. Space the wires at intervals of 6, 36, and 56 inches above ground level. Connect them to the two strands previously strung around the fence. These wires will be connected to the positive fence charger terminal. Attach three more wires to gatepost insulators at intervals of 20, 48, and 64 inches above ground level. These three wires will be connected together and to the ground rod. Fit insulated gate handles to the free ends of all six gate wires.

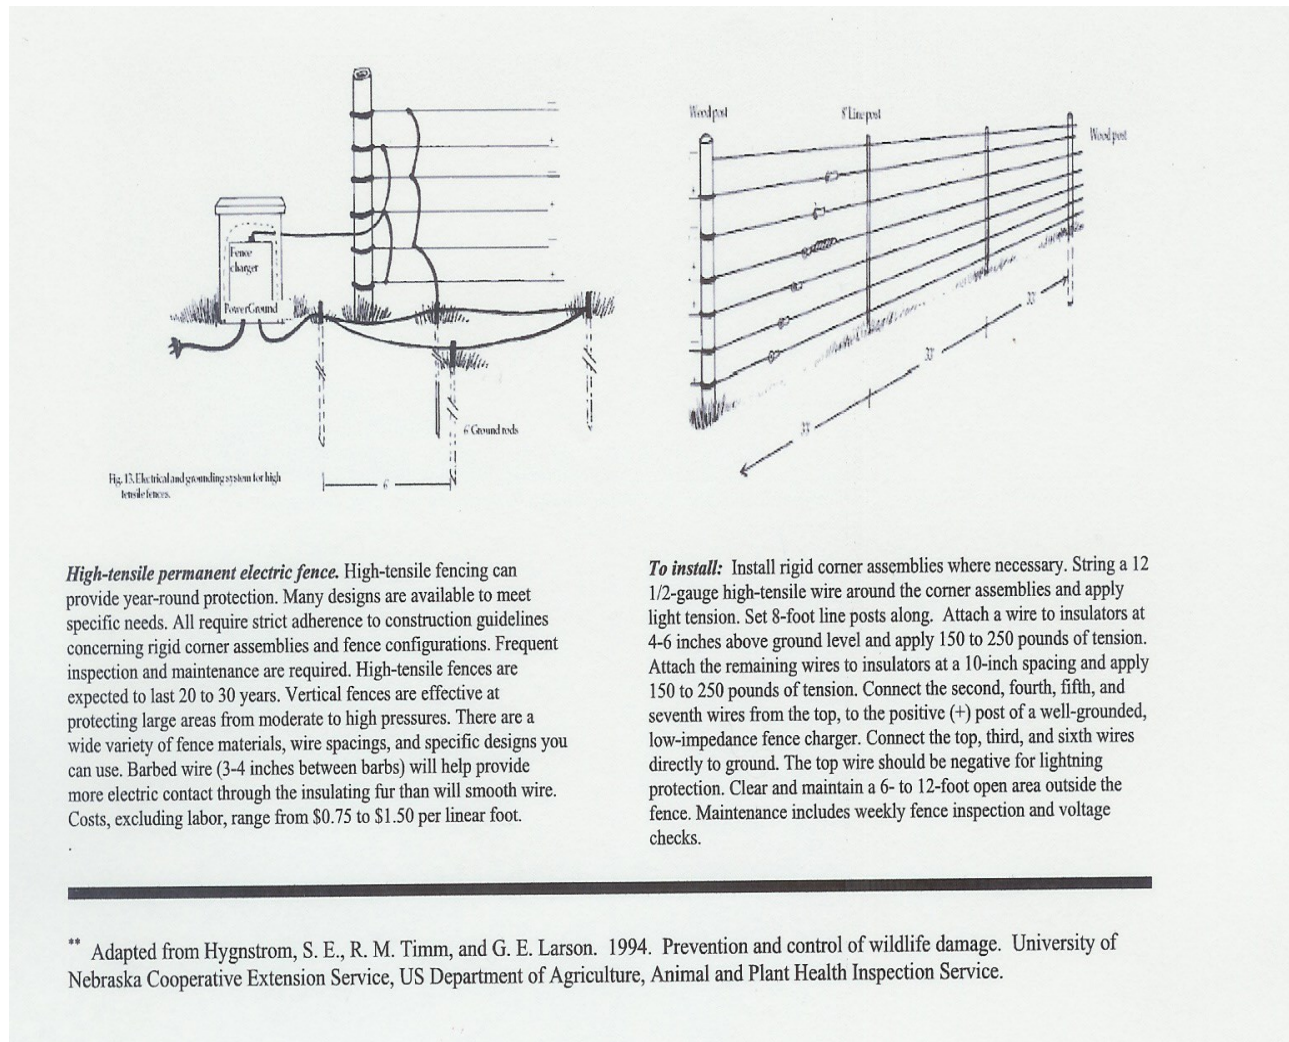

For more information, visit the Virginia Department of Game & Inland Fisheries web site at:

<http://www.dgif.virginia.gov/wildlife/bear/>



United States Department of Agriculture
Forest Service



**Technology &
Development Program**

March 1999

2300

9923-2321-MTDC

Electric Fence Systems

Requirements for Meeting the NCDE Food Storage Special Order

Dave Gasvoda, Project Leader

Since 1995, persons using any portion of the National Forests in the Northern Continental Divide Grizzly Bear Ecosystem (NCDE) have been required to store food, garbage, and other attractants (such as horse feed) in a bear-resistant manner (Special Order No. F10014S95). The area includes wilderness and nonwilderness portions of the Flathead, Lewis and Clark, Lolo, and Helena National Forests south and west of Glacier National Park (see attached map).

Electric fence systems are an acceptable means of meeting the requirement for storage in a bear-resistant manner. Electric fence systems can be used alone or to supplement other forms of bear-resistant storage, such as using bear-resistant containers, or suspending attractants from a support.

Inspection

It is the user's responsibility to operate the system in the field at the required levels. Forest Service employees will inspect electric fences when they are set up in the field.


Fence System Requirements

Fence systems must meet the following minimum requirements:

- The minimum height shall be 1.2 meters (4 feet). Posts shall be at least 1.3 meters (5 feet) long and spaced not more than 2.4 meters (8 feet) apart. The fence shall be constructed with seven wires spaced 15 to 25 centimeters (6 to 10 inches) apart as shown in the illustration on page 2. The bottom wire should be no more than 2 inches from the ground and it may touch the ground.
- The conductors (wires) may be either smooth metal fence wire (16 gauge minimum) or Polywire (polyethylene interwoven with at least six strands of stainless steel wire). In order to make the fence more visible, the top wire may be Polytape (polyethylene ribbon interwoven with at least five strands of stainless steel wire and at least 1.2 centimeters (1/2 inch) wide).
- The fence shall be no closer than 1 meter (3 feet) from the items it is protecting.
- A ground wire return fence shall be used. This fence uses alternating hot and ground fence wires. The top two wires are connected to the fence controller's hot terminal. The third wire down connects to the fence controller's ground terminal. The next wire connects to the hot terminal, and so forth. The bottom wire must be a grounded wire and may touch the earth. The ground terminal connects to an earth ground.
- An earth ground shall be constructed using a metal rod 0.6 meters (2 feet) long or longer. The rod should be driven into the earth as deep as practical. Allow a few centimeters (inches) to remain above the ground so the ground lead wire can be attached. The ground rod should be located in a wet spot if one exists.
- Fence conductors (wires) must be under tension, not loose or sagging. Corner supports (posts, trees, etc.) must be sturdy enough to not deflect excessively under the tension. Fiberglass or plastic corner posts may be used, provided that they are

TD

For additional information contact: Dave Gasvoda, Project Leader, Missoula Technology & Development Center, Building 1, Fort Missoula, Missoula, MT 59804-7294. Phone: (406) 329-3986; Fax: (406) 329-3719; IBM: dgasvoda/wo.mtdc

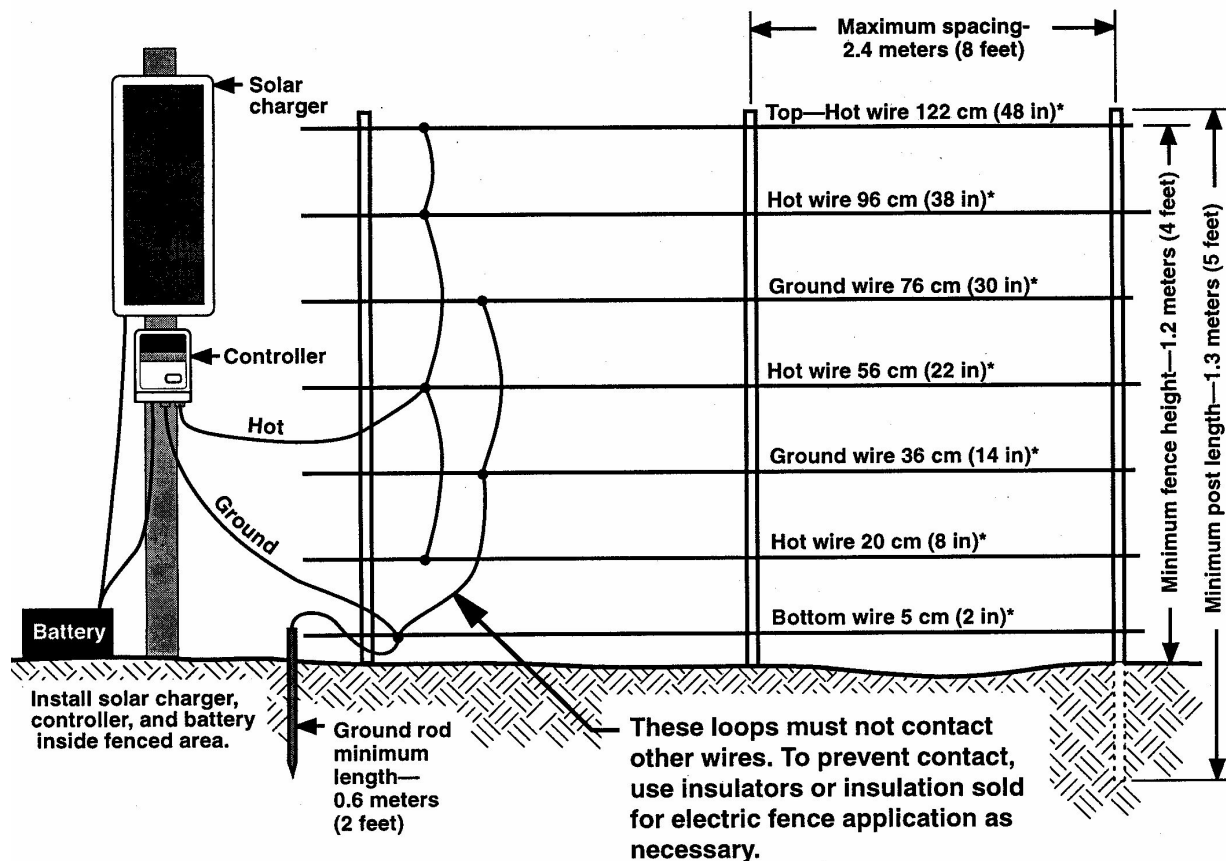

* Height above ground; distance between wires may vary from 6 to 10 inches.

adequately braced. All fence wires connected to the hot terminal of the fence controller must be supported using suitable electric fence insulators. Separate insulators are not required on fiberglass or plastic supports.

- The fence controller must be specified by the manufacturer to have a minimum stored energy of 0.7 joules. Its minimum peak output voltage must be specified as being at least 6000 volts.

- The user must have an electric fence tester on site that is capable of displaying voltage measurements from 600 to 5000 volts. Both multiple glow lamp and digital display types are acceptable. The digital display units are likely to be more accurate and easier to read. The inspection testing shall be made using a Forest Service digital meter. It shall be used to determine that the minimum requirements are met.

- Test the fence voltage as far as possible from the fence

controller. Connect the meter's ground terminal to one of the fence's ground wires and touch the meter's hot terminal to a hot fence wire. Test each hot wire by touching the meter's hot terminal to the wire. Test each ground wire by connecting the meter's ground terminal to the ground wire being tested while touching the meter's hot terminal to any hot wire.

Each conductor must have a tested minimum of 5000 volts. The voltage must appear at least 40 times a minute.

Summary of Fence Specifications

Minimum fence height _____ 4 feet

Minimum post length _____ 5 feet

Maximum spacing
between posts _____ 8 feet

Conductors must be:

*Smooth metal fence wire
(16 gauge minimum)*

or

*Polywire (at least six strands
of stainless steel wire)*

For visibility, the top conductor may be
Polytape (at least five strands of
stainless steel wire, at least 1/2-inch
wide)

Minimum distance between
fence and items inside _____ 3 feet

Ground wire return fence must
be used (alternating hot and
ground wires)

Minimum length ground rod
(earth ground mandatory) _____ 2 feet


Minimum stored energy of
the fence controller _____ 0.7 joules

Minimum tested peak
output voltage on every
conductor _____ 5000 volts

Minimum shocks per minute _____ 40

Minimum number of wires _____ 7

Distance between
wires _____ 6 to 10 inches

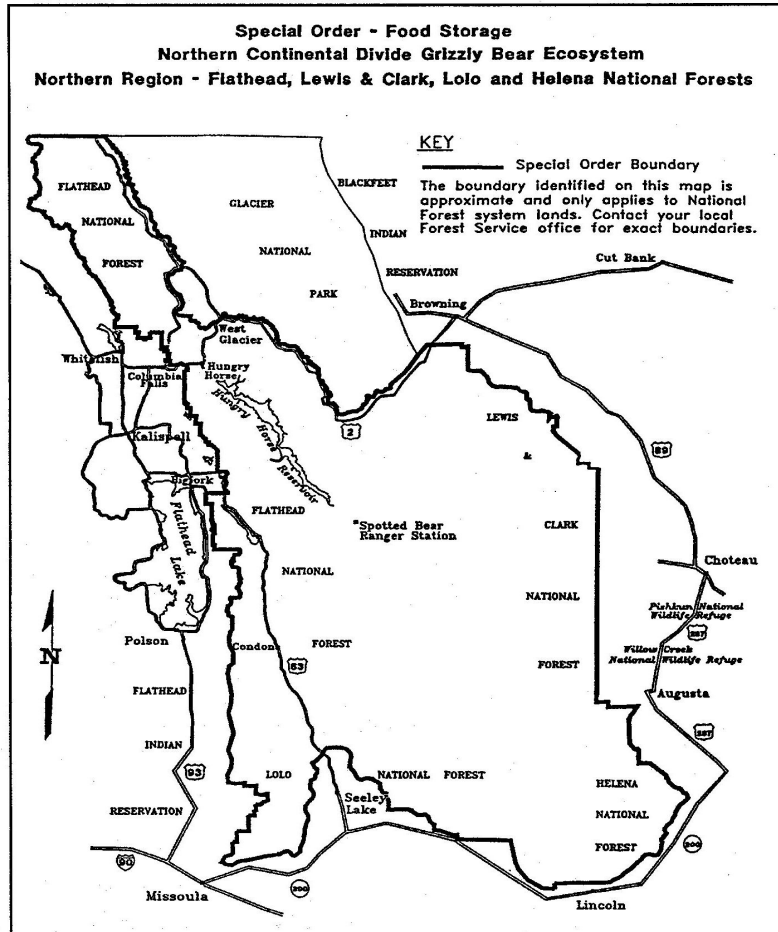

Acknowledgments

The author would like to acknowledge the contributions of Mike Madel, Bear Management Specialist for the Montana Department of Fish, Wildlife and Parks in Choteau, Montana. Mike's work helped establish the requirements that must be met to successfully deter grizzly bears.

Additional single copies of this document may be ordered from:

USDA Forest Service
Missoula Technology and
Development Center
Building 1, Fort Missoula
Missoula, MT 59804-7294
Phone: (406) 329-3900
Fax: (406) 329-3719
IBM: pubs/wo_mtdc
E-mail: pubs/wo_mtdc@fs.fed.us

For additional technical information, contact Dave Gasvoda at the address above.

Phone: (406) 329-3986
Fax: (406) 329-3719
IBM: dgasvoda/wo_mtdc
E-mail: dgasvoda/
wo_mtdc@fs.fed.us

An electronic copy of this document is available on the Forest Service's FSWeb intranet at:

<http://fsweb.mtdc.wo.fs.fed.us>

The Forest Service, United States Department of Agriculture, has developed this information for the guidance of its employees, its contractors, and its cooperating Federal and State agencies, and is not responsible for the interpretation or use of this information by anyone except its own employees. The use of trade, firm, or corporation names in this publication is for the information and convenience of the reader, and does not constitute an endorsement by the

Department of any product or service to the exclusion of others that may be suitable. The United States Department of Agriculture (USDA), prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who

require alternative means for communication of program information (Braille, large print, audiotape, and so forth) should phone USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write: USDA, Director, Office of Civil Rights, Room 326-W, Whitten Building, 14th and Independence Avenue SW, Washington, DC 20250-9410, or call (202) 720-5964 (voice or TDD). USDA is an equal opportunity provider and employer.

Natural Resources Conservation Service

Bear Deterrent Fence Specifications

The information presented on pages 3-62 through 3-81 is provided courtesy of the Natural Resources Conservation Service, Alaska Office and describes a program that is available to residents of the Kenai Peninsula in Alaska. The initiative is part of the Farm Bill Wildlife Habitat Incentive Program (WHIP) and provides qualified landowners wishing to install bear exclusion fences with financial and technical assistance.

The NRCS developed a set of required electric fencing specifications to ensure that fences will be constructed correctly and will be comprised of materials adequate to deter brown bears. While the specifications and the worksheets were developed for the WHIP program, this information could be useful to anyone living or ranching in bear country.

Alaska residents wishing to participate in the program should contact one of the NRCS offices listed on page 3-63.

Pages 3-75 through 3-81 present NRCS Conservation Practice General Specifications for a bear exclusion fence. Please note that the original document also included a section describing specifications for elk fencing. This section was not included when the document was reproduced for inclusion in this publication. For information about the elk fence specifications, please contact the NRCS Alaska Office.



Protecting Brown Bear with Permanent Electric Fences



Electric fences keep bears from being habituated to man-made temptations.

For more information contact:

NRCS Kenai Field Office
110 Trading Bay, Suite 160
(907) 283 - 8732 x100

NRCS Homer Field Office
4014 Lake Street, Suite 201
(907) 235 - 8177 x103

NRCS State Office
800 W. Evergreen, Suite 100
Palmer, AK 99645
(907) 761-7760

Information is also available at
www.ak.nrcs.usda.gov

Overview

The Kenai Peninsula is booming. New homes, cabins and commercial buildings are now located in areas which were once the exclusive home of the great variety of Peninsula wildlife species, including grizzly bears. Bears and people are coming into increasing contact as people introduce conditions that look, smell and taste good to bears.

The USDA Natural Resources Conservation Service developed a new initiative available to Kenai Peninsula landowners to reduce potential interactions between people and bears at sites of human-induced bear attractants: **permanent electric fencing**. Electric bear fencing is a long proven technique to exclude bears from areas where they should not seek food. Permanent electric fences are sturdy and powerful when designed, installed, and maintained properly.

If a bear finds an easy meal, it will be back. Bears are opportunists and have simple needs; they stick with successful safe foraging patterns. Bears have individual personalities too, and learn. For most bears, an unpleasant consequence or two sticks in their memory. Bears can become destructive when searching for food causing people to have less tolerance for them but we can reduce the attraction of our activities to bears. High-visibility electric fences train bears visually as well as by shocking.

Assistance

NRCS can provide site evaluation, fence design, plan development, and financial assistance on projects which utilize recommended industry-specialized materials and approved fence management plans. Keeping a site's footprint and "smell-print" confined is a must to make electric fencing work. Site management plans are integral to electric fencing.

Financial assistance payments, as part of Farm Bill conservation contracts in the Wildlife Habitat Incentive Program (WHIP), are available to improve wildlife habitat conditions and reduce negative impacts to wildlife species. Beginning and limited resource farmers or ranchers, and historically underserved groups like Alaska Natives and American Indian Tribes may receive greater financial assistance.

Eligibility

Sites potentially eligible for NRCS Brown Bear Electric Fence WHIP contracts include lambing or calving sheds or pens, pig sties, chicken coops, bee hives, compost piles or facilities, oyster and fishnet storage yards, dog lots, feed storage, and other aromatic inherent bear attraction conditions. Eligibility is assessed on a site by site basis.



NRCS WHIP Electric Fencing Deterrent Specifics for Kenai Peninsula Brown Bear Contracts

General

- All components are required to be part of a new manufactured complete system or kit
- The energizer may be purchased separately
- No trees, including canopies, structures, or other external fence may be within 10 feet of the outside of electrified fence
- No structure or item may be within four (4) feet of the inside of the electrified fence, except existing fence may be no closer than two (2) feet

Wire

- Fence will be 9 strands
- Conducting line will be high-visibility polyethylene rope/braid, tape or coated conducting material of single strand or woven steel or copper wire
- Top strand will be 52"
- Bottom wire must be no more than 4" above the ground surface
- Maximum wire/line spacing is 6"
- Barbed or bare wire will not be used in the permanent electric fence

Posts

- Post material cannot be metal
- Fiberglass or other synthetic material fencing systems are strongly advised
- Fiberglass or other synthetic posts require minimum 7/8" diameter and will be composed of 10 year UV resistant, rigid material
- Wood posts must have a minimum line post diameter of 3.0"; corner post of 4" minimum diameter
- Maximum line post spacing is 20 feet

Ground Rods

- Installed according to the manufacturer's requirements/recommendations for number, material, spacing and length specific to site
- No fewer than three ground rods of recommended material, length and spacing be used for the ground circuit closest to the energizer
- Ground rods will be a minimum of 20 feet from building foundations, underground metal pipe and all service utilities

Fence Energizers

- A UL or CSA approved for specified use as a non-lethal electric fence energizer is required
- Maximum output current transient peak measured at the 300MA level cannot exceed 300 microseconds
- A joule rating to maintain a minimum of 7000 (but no more than 15,000) volts across an open circuit at all points along the fence
- Pulse time duration will not exceed 0.3 milliseconds
- High impact weather resistant case is required
- 110 volt or 12 volt battery/solar power supply is required
- Energizers of the "weed chopper/weed burner" variety cannot be used

Warning Signs

- Warning signs must be posted to identify the presence of the electric fence and shall be installed on each length and direction change at least one (1) sign per 50 feet of fence



Helping People Help the Land
USDA is an equal opportunity provider and employer



Fence – Bear Exclusion

Conservation Practice Job Sheet

AK-382


Definition

A constructed barrier to bears.

Purpose

This practice helps to achieve conservation objectives by providing a means to control movement of bears.

Where Used

This practice may be applied on any area where interactions with bears and agricultural attractants may lead to a defense-of-life-and-property killing of a bear. In particular, this is a concern on the Kenai Peninsula where the Kenai brown bear is included on the "Species of Greatest Conservation Need" list in the State of Alaska Wildlife Action Plan and has been nominated by the State as a Species of Concern, a legal designation meaning populations are experiencing declines and range restrictions.

Criteria

Fencing materials, type and design of fence installed shall be of a high quality and durability. The type and design of fence installed will meet management objectives and site challenges. Fences shall be positioned to facilitate management requirements.

Ingress/egress features such as gates shall be planned. The fence design and installation should have the life expectancy appropriate for

management objectives and shall follow all federal, state, and local laws and regulations.

Height, size, spacing, and type of materials used will provide the desired control, life expectancy, and management of animals and people of concern.

Operation and Maintenance

Regular inspection of fences should be part of an ongoing maintenance program. Inspection of fences after storms and other disturbances is necessary to insure the continued proper function of the fence. Maintenance and repairs will be performed in a timely manner as needed, including tree/limb removal and water gap replacement. Remove and properly discard all broken fencing material and hardware.

Keep lowest wire clear of grass and other plant material.

All necessary precautions should be taken to ensure the safety of construction and maintenance crews.

Turn fence off in fall when bear activity ceases or snow conditions make the fence useless to operate. Turn on again in spring before bears become active.

A manual cut-off switch should be installed on the lowest wire if snow or ice could be a problem during late fall/early spring operation.

Bear Exclusion Fence

Land user _____ Assisted by _____ Land use _____	Field _____ Date _____
---	---

Type of Fence Applied

Electric six-strand (minimum) fence with alternating hot and ground wires of both smooth wire and poly braid/tape/rope.	The first two wires are 6" apart with the first wire 6" from the ground. Wires spaced 10" thereafter. Access gates installed as needed.
---	---

See attached drawings:

Fence Brace Construction	AK382-002	Bear Exclusion Electric Fence	AK382-018
Fence End and Gate Braces ...	AK382-003	Bear Fence Exclusion Gate	AK382-019
Fence Line Corner Braces	AK382-004		

Material Specifications

Post, steel: Corner and brace will be 2.874 OD with brace members welded to posts; line post will be 2.375 OD, nine foot minimum length.

Post, wood: Yellow Cedar or commercially pressure treated; 4 inch diameter for corner posts and 3 inch diameter for line posts; braced according to attached drawing.

Line/wire: Hot wire - high visibility (white, florescent orange or yellow/black), polyethylene rope/braid or tape.
Ground wire - 12.5 gauge, smooth, high tensile type III galvanize or better.

Ground rods: No fewer than 3 ground rods per installation. Ground rods shall meet the installed fence energizer specifications and will be installed 20 feet from permanent structures, underground pipes and utilities.

Energizers: UL or CSA approved, low impedance (no "weed chopper" or "weed burner" types)
110 volt or 12 volt battery/solar
Maximum output at 300MA shall not exceed 300 microseconds
Discharge output at 300MA shall not exceed 300 microseconds
Joule rating – 0.5 J min. output energy; volts - 7,000 min and 15,000 max.
Pulse time max 0.3 milliseconds
Weather proof

Installation

Refer to and follow attached drawings and specifications. Install according to manufacturer's recommendations except where NRCS recommendations are more stringent.

When setting posts, earth fill will be tamped firmly in 6 inch increments.

Fence posts will *not* be set in concrete due to excessive frost and heave action.

Maximum spacing of line posts will be 20 feet.

On undulating terrain, position line posts on high and low points to maintain required wire height.

Locate ground rods where soils are moist but not continually saturated.

Locate energizer inside the fenced area, if possible.

Maintain separation distances of at least 6 inches from interior fencing, 24 inches from any internal structures, and 10 feet from any trees, buildings or climbable structures outside the fence.

Bear Fence – Job Sketch or reference conservation plan map

Draw or sketch the field, showing any sensitive areas and required setback zones. Inside each sketched field, enter total field acres and net application acres. Other relevant information, such as complementary practices or adjacent field or tract conditions may be included.

Scale 1"=_____ft. (NA indicates sketch not to scale; grid size=1/2" by 1/2")

[illegible]

Perform the following operations and maintenance:

Inspect the fence and components on a periodic basis (weekly) to insure operation. Control vegetation near the fence to prevent unintentional grounding.

Additional specifications and notes:

This plan was developed based on the requirements of the current NRCS standard and any applicable Federal, state, or local regulations or policies. Changes in any of these regulations may necessitate a revision of the plan.

Design Certification

I certify that the above design meets NRCS standards and specifications.

Permits required (e.g. utility locate)? Yes _____ No _____ (attach copy if applicable)

Acres Planned _____ **Linear Feet Planned** _____

Planner _____ **Date** _____

I have reviewed this plan and agree to install as designed and follow operation and maintenance as described in this job sheet.

Cooperator _____ **Date** _____

The United States Department of Agriculture (USDA) prohibits discrimination in its programs on the basis of race, color, national origin, sex, religion, age, disability, political beliefs and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication program information (Braille, large print, audiotape, etc.) should contact the USDA Target Center (202) 720-2600 (voice and TDD).

To file a complaint, write the Secretary of Agriculture, U.S. Department of Agriculture, Washington, D.C., 20250, or call 1-800-245-6340 (voice) or (202) 720-1127 (TDD). USDA is an equal opportunity employer.

APPLICATION / CERTIFICATION

Acres Planned _____ Acres Applied _____

Linear Ft. Planned _____ Linear Ft. Applied _____

Program _____ Contract # _____

I certify that the above installation meets NRCS standards and specifications indicated in the attached AK-382 Job sheet:










☐ YES ☐ No







Planner _____ Date _____






Recommendations and Comments:

Operation & Maintenance

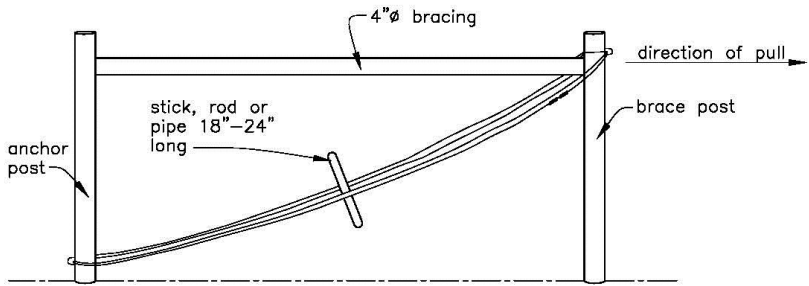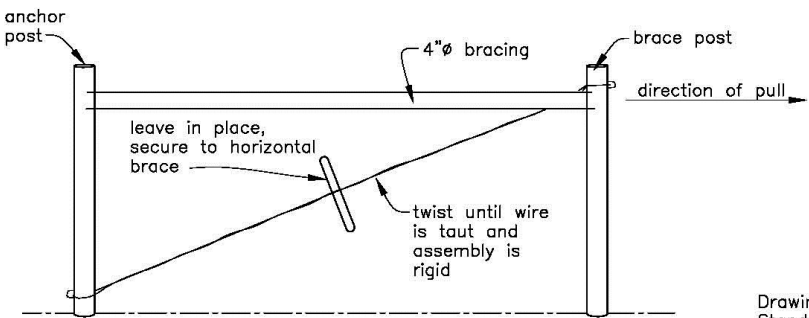Periodic monitoring of this practice is essential to determine 1) if production and ecological goals are being met, 2) if facilitating practices are installed, maintained, and adequate, and 3) if modifications are needed.

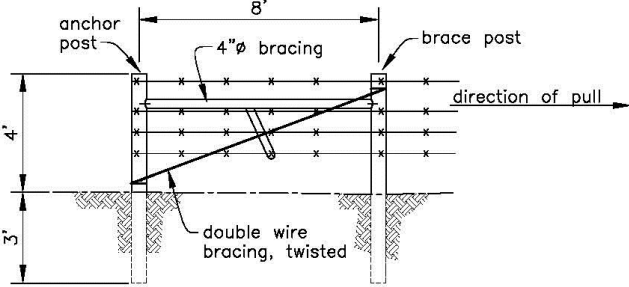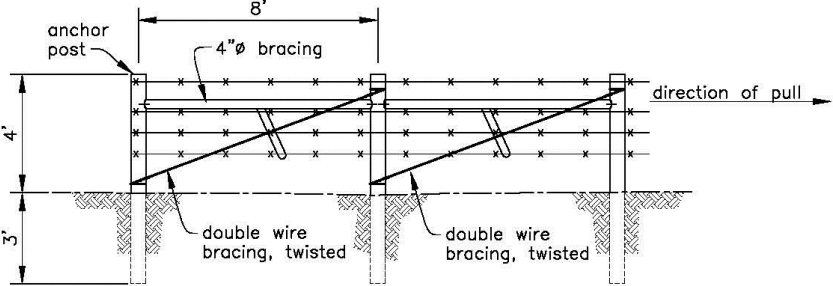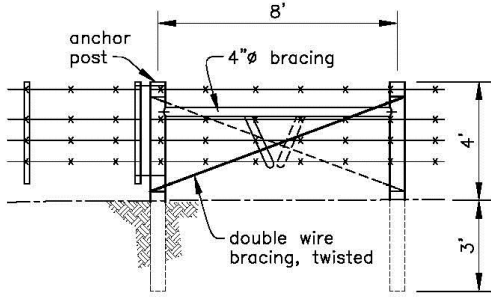ALASKA STANDARD DESIGN	FENCE WIRE FENCE BRACE CONSTRUCTION	AK382 - 002 <small>APPROVED BY: CS ISSUE DATE: 03/2007</small>
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Drive staple about half its length into brace post about 4 inches above brace member on opposite side from brace.</p> </div> <div style="text-align: center;">  <p>Drive staple in similar manner on anchor post about 4 inches from ground line opposite side of brace.</p> </div> <div style="text-align: center;">  <p>Unroll enough brace wire for two complete loops around anchor and brace post.</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div style="text-align: center;">  <p>Thread end of brace wire through one staple and then through the other. Repeat to from three wire strands.</p> </div> <div style="text-align: center;">  <p>Wrap wire around anchor post and return toward brace post.</p> </div> <div style="text-align: center;">  <p>Cut brace wire from roll allowing enough wire to wrap around brace post and extend 6 to 12 inches past other wire end. Make splice.</p> </div> </div> <div style="text-align: center; margin-top: 20px;">  <p style="text-align: center;">BRACE</p> </div> <div style="text-align: center; margin-top: 20px;">  </div> <div style="text-align: right; margin-top: 20px;"> <p>Drawing not to scale. Standardized drawing must be adapted to the specific site.</p> </div>		
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  <p>NRCS <small>Natural Resources Conservation Service United States Department of Agriculture</small></p> </div> <div style="flex-grow: 1; border-top: 1px solid black; border-bottom: 1px solid black; position: relative;"> <div style="position: absolute; right: 0; top: 0;">Date</div> <div style="position: absolute; right: 0; bottom: 0;">File Name AK382-002.dwg</div> <div style="position: absolute; left: 0; top: 0;">Designed</div> <div style="position: absolute; left: 0; bottom: 0;">Drawn <u>B DALLAS</u> 3/07</div> <div style="position: absolute; left: 0; top: 0;">Checked</div> <div style="position: absolute; left: 0; bottom: 0;">Approved</div> <div style="position: absolute; right: 0; top: 0;">Drawing Name</div> <div style="position: absolute; right: 0; bottom: 0;">3/8/2007 12:49PM Sheet of</div> </div> </div>		

ALASKA STANDARD DESIGN	FENCE WIRE FENCE END AND GATE BRACES (BARBED, ELECTRIC, OR WOVEN)	AK382 - 003 <small>APPROVED BY: CS ISSUE DATE: 03/2007</small>																		
<div style="text-align: center;">  <p>1-SPAN END</p> </div> <div style="text-align: center;">  <p>2-SPAN END</p> </div> <div style="text-align: center;">  <p>GATE BRACE</p> </div> <div style="margin-top: 20px;"> <ol style="list-style-type: none"> 1. Double wrap all bracing. 2. All brace and anchor posts to be 7' long, 3' embedment. 3. Notch braces into posts. 4. Spike braces to posts. 5. Anchor and brace posts must be 6 inch top diameter. <p style="margin-top: 20px;">Drawing not to scale. Standardized drawing must be adapted to the specific site.</p> </div>																				
<table style="width: 100%; border: none;"> <tr> <td style="width: 30%; vertical-align: bottom;">  <p style="font-size: small;">Natural Resources Conservation Service United States Department of Agriculture</p> </td> <td style="width: 30%; border: none;"></td> <td style="width: 40%; border: none;"> <table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <tr> <td style="width: 30%;">Designed</td> <td style="width: 30%;">Date</td> <td style="width: 40%;">File Name</td> </tr> <tr> <td>Drawn B DALLAS</td> <td>3/07</td> <td>AK382-003.dwg</td> </tr> <tr> <td>Checked</td> <td></td> <td>Drawing Name</td> </tr> <tr> <td>Approved</td> <td></td> <td>3/9/2007 12:51PM</td> </tr> <tr> <td></td> <td></td> <td>Sheet of</td> </tr> </table> </td> </tr> </table>			 <p style="font-size: small;">Natural Resources Conservation Service United States Department of Agriculture</p>		<table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <tr> <td style="width: 30%;">Designed</td> <td style="width: 30%;">Date</td> <td style="width: 40%;">File Name</td> </tr> <tr> <td>Drawn B DALLAS</td> <td>3/07</td> <td>AK382-003.dwg</td> </tr> <tr> <td>Checked</td> <td></td> <td>Drawing Name</td> </tr> <tr> <td>Approved</td> <td></td> <td>3/9/2007 12:51PM</td> </tr> <tr> <td></td> <td></td> <td>Sheet of</td> </tr> </table>	Designed	Date	File Name	Drawn B DALLAS	3/07	AK382-003.dwg	Checked		Drawing Name	Approved		3/9/2007 12:51PM			Sheet of
 <p style="font-size: small;">Natural Resources Conservation Service United States Department of Agriculture</p>		<table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <tr> <td style="width: 30%;">Designed</td> <td style="width: 30%;">Date</td> <td style="width: 40%;">File Name</td> </tr> <tr> <td>Drawn B DALLAS</td> <td>3/07</td> <td>AK382-003.dwg</td> </tr> <tr> <td>Checked</td> <td></td> <td>Drawing Name</td> </tr> <tr> <td>Approved</td> <td></td> <td>3/9/2007 12:51PM</td> </tr> <tr> <td></td> <td></td> <td>Sheet of</td> </tr> </table>	Designed	Date	File Name	Drawn B DALLAS	3/07	AK382-003.dwg	Checked		Drawing Name	Approved		3/9/2007 12:51PM			Sheet of			
Designed	Date	File Name																		
Drawn B DALLAS	3/07	AK382-003.dwg																		
Checked		Drawing Name																		
Approved		3/9/2007 12:51PM																		
		Sheet of																		

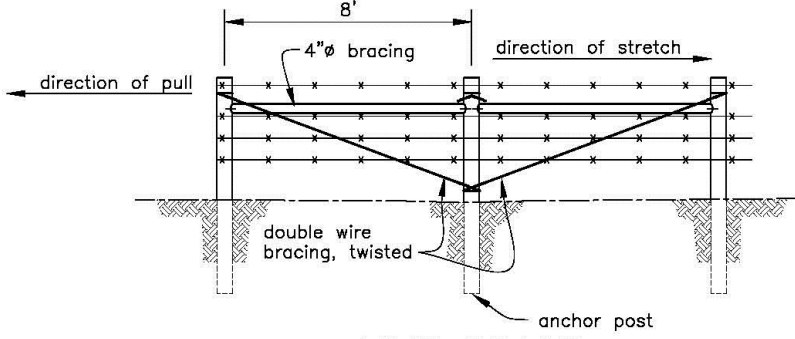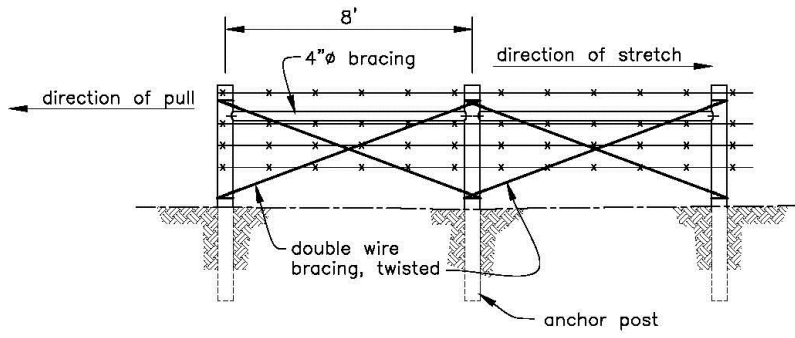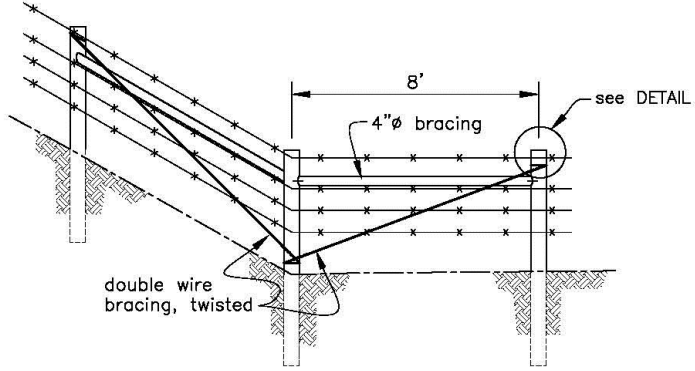ALASKA STANDARD DESIGN	FENCE WIRE FENCE LINE AND CORNER BRACES (BARBED, ELECTRIC, OR WOVEN)	AK382 - 004 <small>APPROVED BY: CS ISSUE DATE: 03/2007</small>																														
<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>LINE BRACE</p> </div> <div style="text-align: center;">  <p>LINE BRACE</p> </div> <div style="text-align: center;">  <p>DETAIL</p> </div> </div> <div style="text-align: center; margin-top: 20px;">  <p>CORNER BRACE OR ANGLES OVER 20°</p> </div> <div style="margin-top: 20px;"> <ol style="list-style-type: none"> 1. Double wrap all bracing. 2. All brace posts to be 7' long, 3' embedment. 3. Notch braces into posts. 4. Spike braces to posts. 5. Brace posts must be 6 inch top diameter. </div> <p style="text-align: center; margin-top: 10px;">Drawing not to scale. Standardized drawing must be adapted to the specific site.</p>																																
 NRCS <small>Natural Resources Conservation Service United States Department of Agriculture</small>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Designed</td> <td style="width: 20%;">Date</td> <td style="width: 50%;">File Name</td> </tr> <tr> <td>Drawn B DALLAS</td> <td>3/07</td> <td>AK382-004.dwg</td> </tr> <tr> <td>Checked</td> <td></td> <td>Drawing Name</td> </tr> <tr> <td>Approved</td> <td></td> <td>3/8/2007 1:11PM</td> </tr> <tr> <td></td> <td></td> <td>Sheet of</td> </tr> </table>	Designed	Date	File Name	Drawn B DALLAS	3/07	AK382-004.dwg	Checked		Drawing Name	Approved		3/8/2007 1:11PM			Sheet of	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Designed</td> <td style="width: 20%;">Date</td> <td style="width: 50%;">File Name</td> </tr> <tr> <td>Drawn B DALLAS</td> <td>3/07</td> <td>AK382-004.dwg</td> </tr> <tr> <td>Checked</td> <td></td> <td>Drawing Name</td> </tr> <tr> <td>Approved</td> <td></td> <td>3/8/2007 1:11PM</td> </tr> <tr> <td></td> <td></td> <td>Sheet of</td> </tr> </table>	Designed	Date	File Name	Drawn B DALLAS	3/07	AK382-004.dwg	Checked		Drawing Name	Approved		3/8/2007 1:11PM			Sheet of
Designed	Date	File Name																														
Drawn B DALLAS	3/07	AK382-004.dwg																														
Checked		Drawing Name																														
Approved		3/8/2007 1:11PM																														
		Sheet of																														
Designed	Date	File Name																														
Drawn B DALLAS	3/07	AK382-004.dwg																														
Checked		Drawing Name																														
Approved		3/8/2007 1:11PM																														
		Sheet of																														

ALASKA STANDARD DESIGN	FENCE BEAR EXCLUSION PERIMETER 6 WIRE ELECTRIC FENCE	AK382 - 018 APPROVED BY: HD ISSUE DATE: 03/2013
---------------------------------------	---	--

DETAIL

LINE POSTS:	Solid, Fiberglass, Rigid Plastic, PVC or other non-conductive material, 7/8 in. dia. min. 10yr. u.v. resistant.	L = 7 ft. min. D = 24 in. min.	
CORNER, GATE, BRACE POSTS:	Wood (4 in. dia. min.)	L = 9 ft. min. D = 3 ft. min.	
ENERGIZERS:	110-volt line-powered 12-volt battery solar-powered		
FASTENERS:	Porcelain insulators Plastic insulators		

Drawing not to scale. Standardized drawing must be adapted to the specific site.

 Natural Resources Conservation Service United States Department of Agriculture	Designed _____ Date _____ Drawn BD JB 3/13 Checked _____ Approved _____	File Name AK382-018.dwg Drawing Name 3/7/2013 9:26AM Sheet of
---	--	---

ALASKA STANDARD DESIGN	FENCE BEAR EXCLUSION PERIMETER 6 WIRE ELECTRIC GATE	AK382 - 019 APPROVED BY: HD ISSUE DATE: 03/2013
---------------------------------------	--	--

ELECTRIFIED CONVENTIONAL GATE

ELECTRIFIED WIRE GATE

 NRCS <small>Natural Resources Conservation Service United States Department of Agriculture</small>		Date	File Name AK382-019.dwg
	Designed _____	3/13	Drawing Name
	Drawn BD JB		
	Checked _____		3/7/2013 11:36AM
	Approved _____		Sheet of

382-1

NATURAL RESOURCES CONSERVATION SERVICE
CONSERVATION PRACTICE GENERAL SPECIFICATIONS

I. Scope

The work shall consist of furnishing materials and installing barbed, smooth, woven wire, electricity conducting poly-weave, tape or coated conducting material, or combinations at the location as shown on the drawings or as staked in the field.

For Bear Exclusion fencing, the primary scope is further defined to ensure that in addition to the deterrence provided by the repelling physical conduction of electricity (shock), that the fence also operates as a visual cue to the bears as a deterrent to passage. This requirement will be incorporated into any system or combination of materials installed under the Permanent Electric Fences for Bear Exclusion concept. As such, education through visual recognition and awareness is a primary component for successful deterrence for a significant portion of bear populations.

II. Considerations

- a. In most of Alaska where there is permafrost or freezing soil conditions, fence posts will NOT be set in concrete because of excessive frost heave action.
- b. In rocky areas, shallow to bedrock soils or permafrost areas special type fence construction may be needed. Contact the State Range Specialist.
- c. With respect to electric fences, locate ground rods in site areas where soil moisture is present, but not in continually saturated conditions.

III. Fence Types-

The following Standard Drawings will be used to prepare plans and certify performance for this practice.
AK382-001 through AK382-019

IV. Materials and Construction Specifications

A. Wire

1. Barbed – Refer to specification on the standard drawings.
2. Smooth – Refer to specification on the standard drawings.
3. Woven – Refer to specification on the standard drawings.
 - a. Gauges Top and Bottom wires will be 11 gauge and other will be 14.5 gauge.

382-2

- b. Must be attached to the post at the bottom and top wires and in between at 1 foot intervals. Top & bottom wires must be attached to the post. Wires in between will be attached at one foot intervals.
- c. At least one barbed wire will be above any woven wire fence less than 7 feet high.

B. Staples, clips and wire ties

- 1. Refer to specification on the standard drawings.
- 2. Staples only will be used on wood posts.

C. Stays

- 1. Refer to specification on the standard drawings.
- 2. Additional stays are not required on woven wire fences unless they have 3 or more single wires above.
- 3. Length of stays will be long enough to connect all single wires and installed so that they swing free of the ground and allow fence to move when touched by animal.

D. Posts

- 1. Wood
 - a. Yellow Cedar is the only native Alaskan tree approved for untreated use; all other native woods are to be treated.
 - b. Chemicals should be applied only if approved by DEC and EPA for Alaska.
 - c. Posts shall be treated by a method to ensure that penetration of the sapwood is obtained that will provide sufficient strength and last for the expected life of the fence (15 yrs.).
 - d. On undulating terrain, position line posts on high and low points to facilitate required wire height.
 - e. For permanent electric bear exclusion fences, minimum line post diameter is 3.0", and corner posts 6".
- 2. Steel pipe posts
 - a. Line posts will be minimum diameter of 2.375 inch O.D. (schedule 40).
 - b. Line posts will be set at the depth as shown in the standard drawings and will extend at least 2 inches above the top wire.
 - c. Corner and brace posts will be 2.875 inch O.D. or greater with horizontal brace member welded to the posts.
- 3. Metal "T" "U" or "Y" posts

382-3

- a. Must be new, painted or galvanized, and weigh a minimum of 1.25 lbs. per foot exclusive of the anchor plate.
- b. Anchor plate on posts must be set 2 inches or more below the soil surface.
- c. May be used as line posts in conjunction with wood posts with the same spacing requirements. The ratio should be 1 wood post for every 4 metal posts.
- 4. Fiberglass, Rigid Plastic, PVC, other synthetic posts
 - a. Will only be used when it can be documented that they meet or exceed the strength, durability and longevity of the post specified.
 - b. For permanent electric bear exclusion fences, minimum line post diameter is 7/8" of 10yr UV resistant rigid material.
- 5. Trees
 - a. Trees will NOT be used as posts in Alaska.

(Setting Posts and alignment)

- a. Line posts will be set in as straight a line as possible between corners or braces.
- b. Post will be set at top and bottom of definite slope changes.
- c. When setting posts, earth backfill will be tamped firmly in 6 inch increments.

E. Corner, Gate and End Bracing

- 1. Braces, and/or end assemblies are required at all corners and at all gates.
- 2. Line braces are required every 1300 feet for all wire (except electric) fences.
- 3. When fence turning point changes more than 20 degrees, a corner brace is required.
- 4. Corner, gate and end bracing for permanent electric fences will be according to system manufacturer recommendations for specific application, using wood or poly-plastic composites only.

F. Gates

- 1. Wire gates will be constructed of the same materials required for the adjoining fence.
- 2. Stays are required every 5 feet on wire gates.
- 3. Commercially available gates will meet the user's objectives, but must conform to the height and containment capabilities of the adjoining fence and be constructed of material of a quality and life span equivalent to the rest of the fence.
- 4. Gates for permanent electric fences will be according to system manufacturer recommendations.

382-4

SPECIFIC FENCE TYPES

1. Temporary/Moveable Electric Fences (1, 2, or 3 wire)

1. Barbed wire will never be used as a charged or ground wire.
2. Maximum line post spacing will not exceed 50 feet or 75 feet with one fiberglass stay.
3. Top wire will be approximately two-thirds the shoulder height of the animal to be contained.
4. Wire will be new, smooth 12.5 gauge, high tensile (135,000psi) type III galvanized or better or polyethylene wire and tape with woven steel or aluminum wire. Polytape is best used in situations where high visibility is a concern such as with horses.
5. Temporary net fence is available and can be used for concentrated livestock use.
6. Line braces will be spaced at intervals no greater than 2,640 feet.
7. Fence Energizers:
Must be UL or CSA (Underwriters Laboratory, Canadian Standards Association) approved for specified use as a non-lethal electronic fence power controller. Energizers will be installed according to the manufacturer's recommendations and will meet the following minimum specifications.
 - a. The maximum length of charged wire per controller will not exceed manufacturer's recommendation for size and type of wire used.
 - b. Maximum output current transient peak measured at the 300MA level shall not exceed 300 microseconds, intermittent peak discharge output shall consist of regularly timed pulses of not more than 0.2 seconds "on" and not less than 0.75 seconds "off" per cycle.
 - c. A joule rating to deliver a minimum 2,500 volt shock for cattle and horses, 3,000 volt for sheep, or 2,500 for big game at any point on the fence line.
 - d. Pulse time duration will not exceed 0.3 milliseconds.
 - e. Safety-pace fuse will be installed.
 - f. Solid state circuitry (snap-in circuit panels).
 - g. High impact weather resistant case.
 - h. A 110 volt, 220 volt, or 12 volt battery/solar power supply.

382-5

2. Permanent Electric Fences for Bear Exclusion (6 wire)

1. Corner post will meet the standard for all fences, section D above.
2. Load carrying lines will be high-visibility white, fluorescent orange or yellow/black (or white/black) combination polyethylene rope/ braid, tape Bare galvanized wire shall be used for grounding. Ground wire will be new, smooth 12.5 gauge, high tensile (135,000psi) type III galvanized or better.
3. Barbed wire will not be used as a component structure of the permanent electric fence. No barbed wire may be present within 24" of any electrified components of the electric fence to be installed.
4. Utilize line posts as needed to maintain the required line spacing (see #5 below Line posts will meet the standard for all fences, section D above, and will have a maximum spacing of 20 feet between posts.
5. Total fence height will be 52". Bottom wire shall be 6" from ground surface and shall be grounded. The second line will be 6" from the bottom ground wire (12 inches from the ground) and will be charged. From there, line/wire spacing is 10". Every other line must be hot, ending with a hot wire at 52 inches in height (six wires total).
6. Fences operated during snow accumulation periods will have line cut-off switches to prevent grounding of wires against snow pack.
7. The installed electric fence shall always be located to the outside of any existing fence or enclosure structure. The electric fence must be a minimum of 6 inches from any interior fence and 24" from any enclosure structure. No trees, including substantial canopies or climbable structures, may be within 10' of the outside of the fence.,.
8. Ground Rods:
Shall be installed according to manufacturer's fence energizer requirements/ recommendations for number, material, spacing and length to maximize compatibility with system materials and ground (soil and moisture) conditions specific to the site.
 - a. Under no circumstances shall fewer than three ground rods of recommended material, length and spacing be used for the ground circuit closest to the energizer.

382-6

- b. Ground rod locations shall be a minimum of 20' from building foundations, known underground metal pipe, and all service utilities.

9. Fence Energizers:

Must be UL or CSA (Underwriters Laboratory, Canadian Standards Association) approved for specified use as a non-lethal electronic fence power controller. Energizers will be installed according to the manufacturer's recommendations and will meet the following minimum specifications.

- a. The maximum length of charged wire per controller will not exceed manufacturer's recommendation for size and type of wire used.
- b. Maximum output current transient peak measured at the 300MA level shall not exceed 300 microseconds; intermittent peak discharge output shall consist of regularly timed pulses of not more than 0.2 seconds "on" and not less than 0.75 seconds "off" per cycle.
- c. A joule rating minimum of 0.5 or greater to maintain a minimum of 7,000 (but no more than 15,000) volts across an open circuit at all points along the fence and that will keep a minimum 6100 volts on the line under a 500 ohm weed burden.
- d. Pulse time duration will not exceed 0.3 milliseconds.
- e. Solid state circuitry (snap-in circuit panels).
- f. High impact weather resistant case.
- g. A 110 volt or 12 volt battery/solar power supply.
- h. Energizers of the "weed chopper" weed burner" variety may not be used. Use only low impedance energizers.

G. Maintenance

- 1. Periodic and frequent maintenance is required to maintain the integrity of the fence as designed. All observed deviations from the approved fence design will be corrected in a timely manner.
- 2. Check frequently for visible signs that the fence is not functioning such as; wire is loose, broken or spacing is irregular, or posts are loose or out of alignment.
- 3. Inspect fence after storm events to insure the continued proper functioning of the fence.
- 4. Management recommendations provided by manufacturer (s) must be approved by NRCS for electric bear fences. Operation and management requirements provided by NRCS specific to the installation (where provided), shall also be incorporated.

V. References and additional Planning Tools

Conservation practice standards are reviewed periodically and updated if needed. To obtain the current version of this standard, contact your Natural Resources Conservation Service [Alaska State Office](#) or visit the [electronic Field Office Technical Guide](#).

NRCS, Alaska
February, 2013

382-7

ASTM Standard 116, 121

**Fences That Work: Temporary Electric Fence Materials
Evaluation**, David R. Pratt, Livestock and Range Report No.903.

Fences, USDA Forest Service Handbook, Feb.1999

The following information was summarized and provided by Seth Wilson of the Blackfoot Challenge.

Natural Resources Conservation Service (NRCS) Offers
Predator Deterrent Fencing under the
Environmental Quality Incentive Program (EQIP)

Overview:

The Natural Resources Conservation Service's Environmental Quality Incentives Program (EQIP) was reauthorized in the Farm Security and Rural Investment Act of 2002 (Farm Bill) to provide a voluntary conservation program for farmers and ranchers. These programs are designed to maintain agricultural production and environmental quality. EQIP offers financial and technical help to assist eligible participants install or implement structural and management practices on eligible agricultural land.

An emerging effort in the state of Montana under EQIP provides livestock producers and beekeepers with a 75% cost-share payment for high-powered electric fences designed to non-lethally deter bears and wolves. The NRCS in collaboration with the Blackfoot Challenge and Montana Department of Fish, Wildlife & Parks is experimenting with fencing designs on several new projects. At this time, the NRCS has specified that electric fences have the following design specifications:

Summary of Current Specifications:

Energizer: Minimum 6,000 volt delivered to the fence

H-Braces: Set minimum 10-foot long wooden posts every 1,320 feet, buried 3 feet

Line-posts: Set minimum 8-foot line posts along 20-foot intervals (experimenting with 40-foot interval)

Wires: 9-wire, high tensile steel

Height: 6-feet

Spacing: Top 72"(+), 2nd 62"(-), 3rd 52"(+), 4th 42"(-), 5th 32"(+), 6th 24"(-), 7th 18(+), 8th 12"(-) 9th 6"(+)

For More Information:

Please contact the NRCS Deer Lodge Office: (406) 846-1703

Detering Wolves and Coyotes with Electric Fencing

Electric fencing is being used to deter wolves in a number of areas, however, its use has been somewhat limited. In many cases it is not practical or cost-effective to fence an entire pasture or grazing allotment to exclude wolves. However, small or temporary paddocks, bedding areas or holding pens have been enclosed by electric fencing with some success.

Wolf managers in Arizona and New Mexico are using electric fencing combined with "turbo fladdry" to deter Mexican gray wolves from livestock areas (AnnMarie Houser, US Fish and Wildlife Service, personal communication). Fladdry consists of strips of orange or red flagging tied approximately one foot apart along a strand of electric wire. This "turbo fladdry" is strung around an existing fence approximately 2 feet from the existing fence. The electric fence wire is strung about knee high from the ground which is about nose height for the wolves.

The fladdry (red or orange flagging) waving in the wind acts as a psychological barrier for the wolf and is believed to increase the effectiveness of the electric fencing to deter wolves.

Turbo fladdry is also being used in Idaho. The shock from the Turbowire may repel wolves while also preventing livestock from chewing on the flagging. There is ongoing research related to use of electric fencing to deter wolves, and "turbo" fladdry shows promise.

Fences constructed of five or six, alternating hot and ground wires are being used effectively to deter wolves and coyotes from livestock in Montana.

Fences should be at least 40" high and the bottom wire should be no more than 6" from the ground to prevent the animals from going under the fence.



The fence pictured on the left was constructed near Choteau, Montana and has been effective in excluding wolves and bears.



The fence is modified field or woven sheep fence with a 5-wire alternating hot/ground system. Offset brackets hold the bottom hot wires and two hot and one ground at the top.

Photos courtesy of Larry Feight.



This fence in Montana is used as a night holding pen for llamas and sheep.

Grizzly bears had also been seen on the property, so the fence protected the llamas from both kinds of predators.

The fence design consists of seven strands of wire, alternating hot and ground.

The gate was modified with fiberglass post extensions at each end to allow hot wires to be strung above the top of the gate. This modification prevented predators from accessing the pen by going over the gate.

The photo on the right shows the same fence with rapid wire tighteners.

Photos above and right courtesy of Patti Sowka.



Electric netting has been used with mixed results for temporary sheep pens. The main difficulty lies in herding sheep into the enclosure at night. The netting does however hold up and deter predators well.

The photo to the left is an electric net fence around a sheep allotment in Wyoming.

Photo courtesy of Wyoming Game and Fish


Non-electric net fences have also been used to deter coyotes. The fence should be between 5 or 6 feet high and the mesh openings should be no greater than 4 to 6 inches. One or two strands of hot wire should be strung just above the net fence to prevent animals from climbing up or jumping over the net fence. If digging appears to be a problem, a wire mesh apron can be buried just below and in front of the net fence.

Deterring Mountain Lions with Electric Fencing

Electric fencing can also be used to deter mountain lions, or cougars, from chicken coops, pig pens, calving pens, and animal stalls. The authors of this guide have successfully used one strand of hot wire installed at the top of a non-electric convention non-climb field fence to exclude mountain lions from a chicken pen in Northwestern Montana. It should be noted that additional research is needed to determine the most effective way to construct electric fencing to deter this species.

Our design utilized one hot wire strung approximately six inches above the top of a 5-foot high field fence that enclosed a small pond and shed that housed chickens and ducks. Mountain lions were climbing the field fence at night and preying on the chickens inside the pen. To deter the mountain lions, we installed extension posts approximately every 6 to 8 feet along the entire perimeter of the enclosure fence. Insulators attached to the extension posts prevented the hot wire from grounding out.

Although one hot wire worked for our enclosure, we recommend a minimum of 2 hot wires. To ensure that the lion receives a shock, installation of three strands, two hot wires with ground wire in between, is recommended. The ground wire in between would ensure that the lion is adequately grounded as it makes contact with at least one of the hot strands, and thereby increases the likelihood that the animal receives an adequate shock.

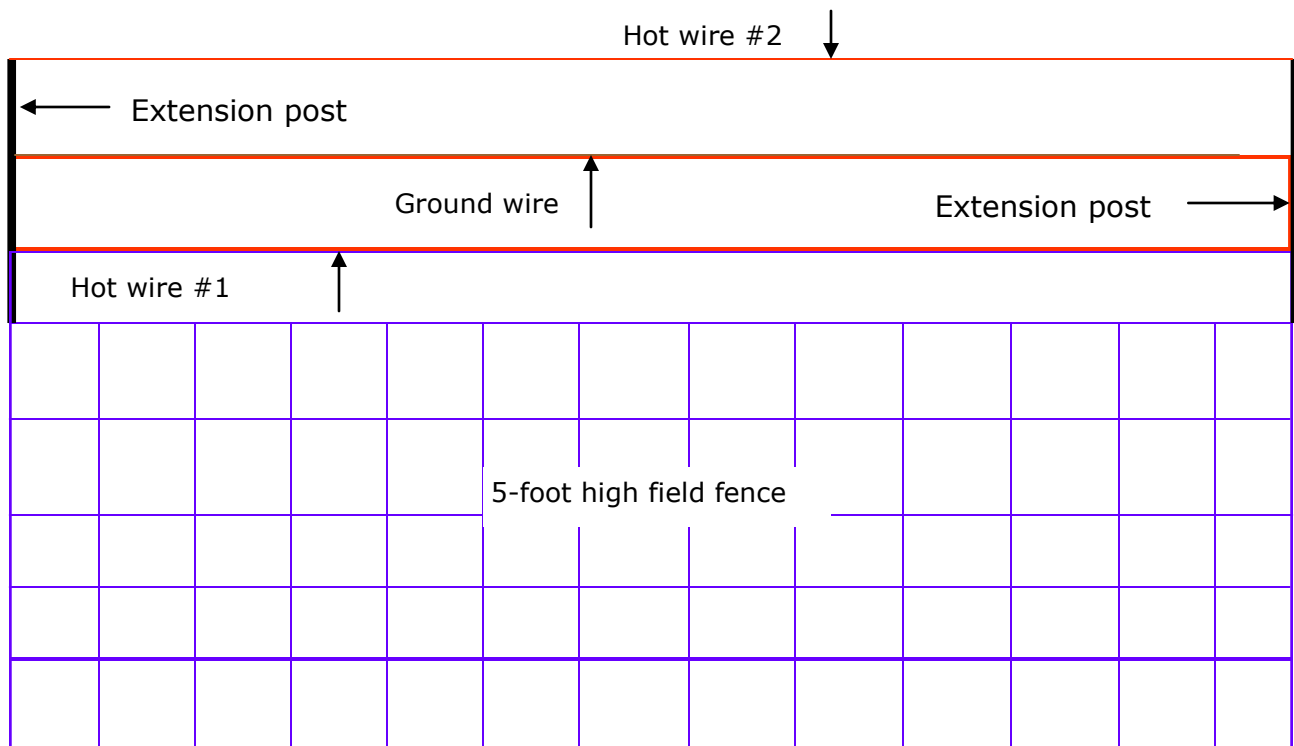

Electric Fencing Manufacturers and Vendors

Fi-Shock Inc.

5360 N. National Dr., Knoxville, TN 37914
865-524-7380 Fax 865-673-4770
www.fishock.com

Gallagher

P.O. Box 7506 Kansas City, MO 64116
1-800-531-5908
www.gallagherusa.com
info@gallagherusa.com

Margo Supplies Ltd.

P.O. Box 5400, High River, Alberta
Canada T1V 1M5
403-652-1932 Fax 403-652-3511
www.margosupplies.com
info@margosupplies.com

Premier 1 Supplies

2031 300th St., Washington, IA 52353
319-653-6304
www.premier1supplies.com
info@premier1supplies.com

Max-Flex Fence Systems

Lindside, WV 24951 1-800-356-5458
www.maxflex.com

Parmak

Parker McCrory Mfg. Co.
2000 Forest Ave., Kansas City, MO 64108
816-221-2000 Fax 816-221-9879
www.parmackusa.com
info@parmackusa.com

Wyoming Outdoor Industries Inc.

1-800-725-6853
www.wyomingoutdoor.com

Zareba Systems

13705 26th Ave. N., Suite 102
Minneapolis, MN 55441
763-551-1125 Fax 763-509-7450
www.zarebasystems.com

UDAP Industries Inc.

P.O. Box 10808, Bozeman, MT 59719
406-763-4242
www.udap.com

Safe Fence by J.L. Williams Company

P.O. Box 209, Meridian, ID 83680
1-800-843-3702
www.safefence.com

Electric Fencing Manufacturers and Vendors cont.)

Tru-Test Incorporated
Speedrite / Patriot product lines
528 Grant Road
Mineral Wells, TX 76067
(800) 874-8494
Fax (940) 327-8048
www.speedrite.com
www.patriotglobal.com

Kodiak Wildlife Products
"Bear Stop Portable Electric Fence System"
#108, 104 Kananaskis Way
Canmore, AB CANADA
T1W 2X2
(866) 356-3425
Fax (403) 2067527
sales@kodiakwildlife.com

Scares Bears & Other Nuisances
P.O. Box 1185
Superior, WI 54880

Other Sources of Information About Predators

Montana Fish, Wildlife & Parks

www.fwp.state.mt.us

Interagency Grizzly Bear Committee

www.fs.fed.us/r1/wildlife/igbc

Alaska Department of Fish and Game

www.state.ak.us/adfg/adfghome.htm

U.S. Forest Service

- www.southernregion.fs.fed.us/resources/features/Feature-bears-p2.htm
- www.fs.fed.us/r3/coronado/scrd/nathist/nature/blackbear.htm

Pitkin County Government, Roaring Fork Bear Awareness Team

www.pitkingov.com/sitepages/pid154.php

Colorado State University Cooperative Extension

www.coopext.colostate.edu/wildlife/vendors_of_supplies.html

Sierra Interagency Black Bear Group

www.sierrawildbear.net

Northwest Territories Resources, Wildlife and Economic Development

www.nwtwildlife.rwed.gov.nt.ca

Govt. of British Columbia, Ministry of Water, Land and Air Protection, Bear Smart Program

[Http://wlapwww.gov.bc.ca/wld/bearsmart/bearsmintro.html](http://wlapwww.gov.bc.ca/wld/bearsmart/bearsmintro.html)

Center for Wildlife Information

www.BeBearAware.org

Brown Bear Resources

406-549-4896

www.brownbear.org

Bear Info. Site

www.bearinfosite.com

Defenders Of Wildlife

www.defenders.org

Bear Aware Initiative

C/o Sierra Club

P.O. Box 263

Jackson, WY 83001

The Tahoe Donner Association

www.tahoedonner.com

City of Juneau, Alaska

www.juneau.org

Pacific Northwest Extension

<http://extension.oregonstate.edu/catalog/pdf/pnw/pnw225.pdf>